


DATASHEET

RS-HYMax7927MR6-2
UHF RFID Dry Inlay

KEY DATA

Chip: Monza R6
Antenna Size: 94 × 24 mm
Format: Dry Inlay, Wet Inlay,
White Paper

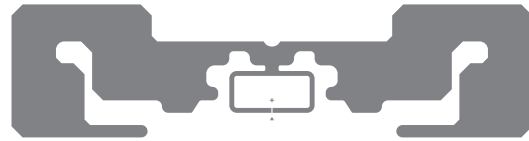


RS-HYMax9727MR6-2

APPLICATION

Supply Chain & Logistics Management
Warehouse Management



OVERVIEW




RS-HYMax9727MR6-2 UHF RFID Dry Inlay is built with Impinj Monza R6.

The Monza R6 UHF RFID tag chip is optimized for serializing items such as apparel, electronics, cosmetics, documents and jewelry. It delivers unmatched read performance and data integrity for effective RFID business systems and record-breaking encoding performance to enable the lowest applied tag cost. The Monza R6 tag chip includes revolutionary technologies such as automatic performance adjustments and encoding diagnostics that reinforce the position of the Monza tag chip family as the RFID industry leader.


DATASHEET

RS-HYMax7927MR6-2
UHF RFID Dry Inlay

DIMENSIONS

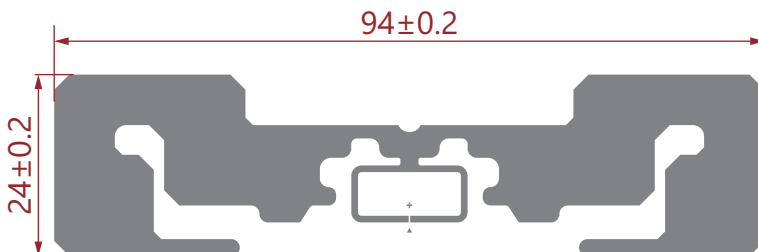


ORIENTATION

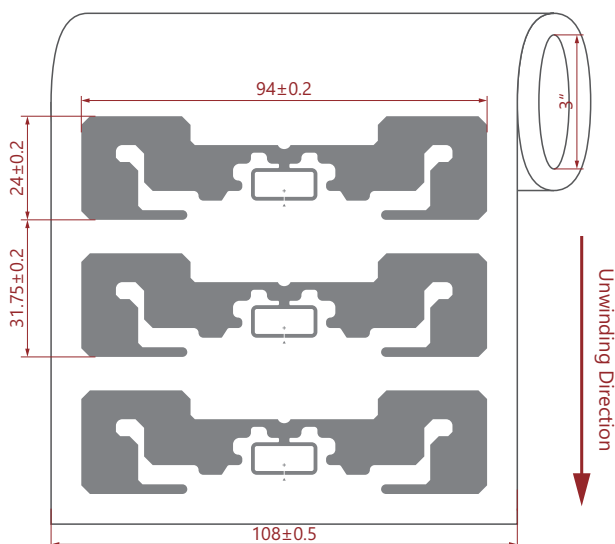

Physical characteristics	Dimensions
Antenna size	94 × 24 mm
Inlay pitch	31.75 mm
PET width	108 mm
Dry Inlay thickness	Al 10 μm + PET 50 μm
Reel detail	Web width: 108 ± 1.0 mm Inner core diameter: 3" (76.2 mm) Core thickness: 5 ± 2 mm

STRUCTURE


Dry inlay

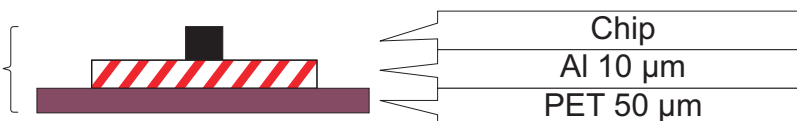

ELECTRICAL CHARACTERISTICS

Item		Description
Manufacture/IC		Impinj Monza R6
Base Material		PET
Antenna		Etched Al (10 μm) + PET (50 μm)
Protocol		RAIN RFID / ISO 18000-6C and EPC global Gen2v2 Compliant
Memory	User	None
	TID	48 bits
	EPC	96 bits
	Password	Kill Password - None
Access Password - None		
Frequency		860 ~ 960 MHz
Operating Mode		Passive
IC Life		100,000 Programming cycles, 50years data retention
ESD Voltage Immunity		Max. 2000 V

TAG PERFORMANCE

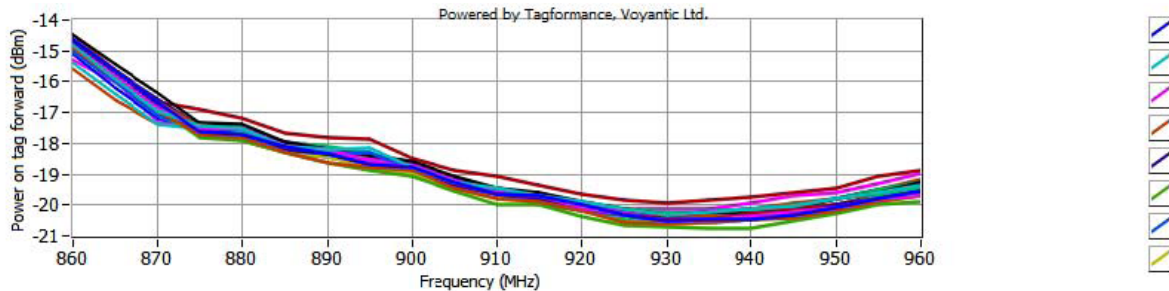

DATASHEET

RS-HYMax7927MR6-2
UHF RFID Dry Inlay

ENVIRONMENTAL REQUIREMENT

- Operating Temperature/Humidity: $-5^{\circ}\text{C} \sim 60^{\circ}\text{C}$ / 20% ~ 80% RH
- Storage Temperature/Humidity: $20^{\circ}\text{C} \sim 30^{\circ}\text{C}$ / 20% ~ 60% RH
- Shelf Life: From the date of manufacture, 1 year in anti-static bag at $20^{\circ}\text{C} \sim 30^{\circ}\text{C}$ / 20% ~ 60% RH, and avoid direct sunlight exposure

PACKAGING

Reference Packing: Static-free bag with zipper; 6000 \pm 100 Pcs/roll, 4 rolls/ctn (Actual Qty as per Shipping Mark).

