


DATASHEET

RS-HY2828U7-2
UHF RFID Dry Inlay

KEY DATA

Chip: UCODE 7
Antenna Size: 28 × 23.7 mm
Format: Dry Inlay, Wet Inlay,
White Paper

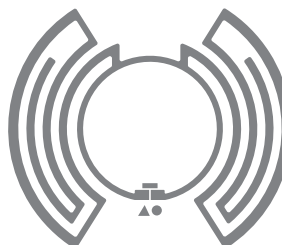


RS-HY2828U7-2

APPLICATION

Supply Chain & Retail
Warehouse Management


OVERVIEW

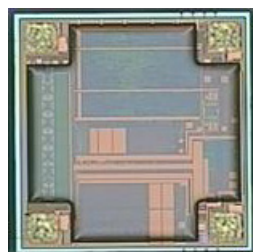


RS-HY2828U7-2 UHF RFID Dry Inlay is built with NXP UCODE 7.

The U7 IC is the leading-edge EPC Gen2 RFID chip that offers best-in-class performance and features for use in the most demanding RFID tagging applications. Particularly well suited for inventory management application, like e.g Retail and Fashion, with its leading edge RF performance for any given form factor, UCODE 7 enables long read distance and fast inventory of dense RFID tag population. With its broadband design, it offers the possibility to manufacture true global RFID label with best-in-class performance over worldwide regulations.

DIMENSIONS

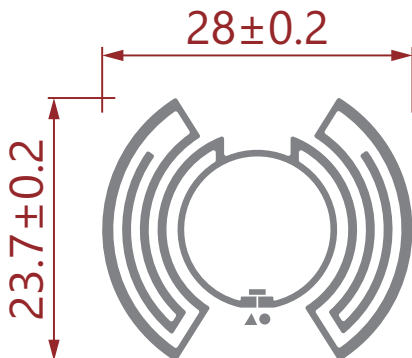


ORIENTATION

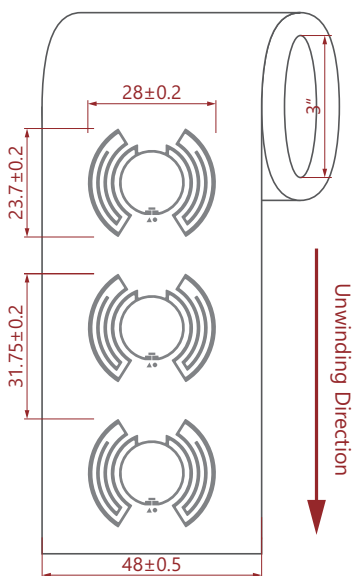

Physical characteristics	Dimensions
Antenna size	28 × 23.7 mm
Inlay pitch	31.75 mm
PET width	48 mm
Dry Inlay thickness	Al 10 μm + PET 50 μm
Reel detail	Web width: 48 ± 1.0 mm Inner core diameter: 3" (76.2 mm) Core thickness: 5 ± 2 mm

STRUCTURE

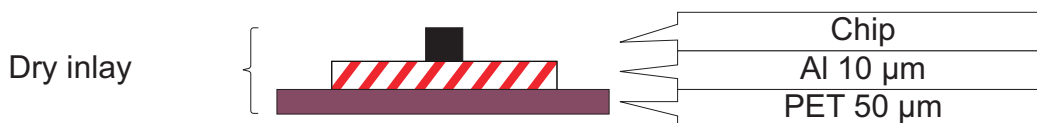

ELECTRICAL CHARACTERISTICS

Item		Description
Manufacture/IC		NXP UCODE 7
Base Material		PET
Antenna		Etched Al (10 μm) + PET (50 μm)
Protocol		RAIN RFID / ISO 18000-6C and EPC global Gen2v2 Compliant
Memory	User	None
	TID	48 bits
	EPC	128 bits
	Password	Kill Password - 32 bits
Access Password - 32 bits		
Frequency		860 ~ 960 MHz
Operating Mode		Passive
IC Life		100,000 Programming cycles, 50 years data retention
ESD Voltage Immunity		Max. 2000 V

ENVIRONMENTAL REQUIREMENT

- Operating Temperature/Humidity: -5°C ~ 60°C / 20% ~ 80% RH
- Storage Temperature/Humidity: 20°C ~ 30°C / 20% ~ 60% RH
- Shelf Life: From the date of manufacture, 1 year in anti-static bag at 20°C ~ 30°C / 20% ~ 60% RH, and avoid direct sunlight exposure

PACKAGING

Reference Packing: Static-free bag with zipper; 10000 ± 100 Pcs/roll, 8 rolls/ctn (Actual Qty as per Shipping Mark).

