

Model	Standard	Category
M-8022 Rubber	EN ISO 20345:2011	SBP SRC /HRO


Images



Upper:	High Quality Smooth Cow Leather
Lining:	Abrasion Resistant Sandwich Mesh
Insock:	Breathable EVA Insock
Outsole:	Rubber Cement, 300°C Heat Resistant
Tested :	By UK Intertek Lab (Approved body:0362)
Toe:	Steel Toecap to Resist 200 Joules Impact
Penetration:	Steel Plate to Resist 1100 Newtons Puncture
Size:	Euro 37-47#, UK 3-13# , US 4-14#

SRC		
SRC (SRA+SRB)		
SRA CERAMIQUE EAU ET	PU ≥ 0.32 SRA ≥ 0.28	0.52 0.48
SRB POLY GLYCERINE	PU ≥ 0.18 SRA ≥ 0.13	0.23 0.18

Scale: S1
PU - PU
EN ISO 20345:2011

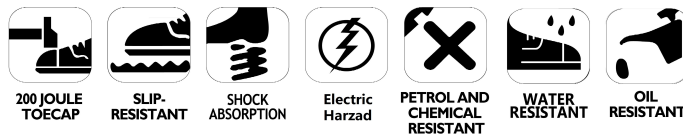

Weight & Packages

1. Weight: 1.2-1.3 KGS/Pair
2. Each pair is packed in one color box, box size: 32*23*12CM
3. 10 pairs are packed in one carton, carton size: 62*48*33CM

User Instructions & Storage

1. RECOMMENDED TO USE: Basic Workplaces, Construction, Logistics, Mechanics, Glasses installation, Workshop, Metal & Related Heat Resistant Industry, Chemical Industry, Oil Industry, Mining etc.
2. LIMITATION TO USE: It is very important that footwear selected must be suitable for the right workplaces. The protection against risks or hazards which are not mentioned in this document is not warranted.
3. FITTING & SIZE: All footwear are marked with standard size on tongue label. Please wear footwear by a suitable size. Footwear which are too loose or too tight may not provide optimum level of protection.
4. STORAGE: Keep in its original packaging, under ordinary temperature and non-humidity conditions and in clean, covered and ventilated premises.
5. CLEANING: Clean footwear regularly by high quality cleaning treatments recommended as suitable for the purpose. Don't use caustic or corrosive cleaning agents.

Outsole Material:


The outsole is made in natural rubber with 10-15% nitrile. The side are stitched with kevlar thread, to enhance bond strength between upper & outsole. The rubber material can pass 300°C hot resistant HRO test, and can pass SRC slip-resistant test.

Insock Material:



J-001 insock design, the ventilation fabric can absorb 90% sweat and dry feet efficiently. U-design support heel can disperse human weight pressure, and reduce friction between feet and shoes. EVA material is soft and flexible, to increase comfortability during walk.

Toecap Protection:



Stainless steel toe cap can reach 200 joules. It is more strong than iron toe cap.

Penetration Protection:



Steel midsole plate, is zero-penetration resistant, which can resist 1100 newtons nail puncture. It is more strong and flexible than normal iron plate.