



PORTABLE POWER STATION

For Brighter, Safer And More Beautiful Life

MPMC GROUP OF COMPANIES

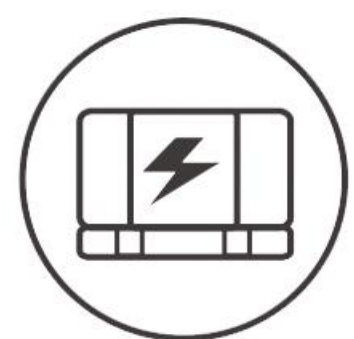

Generator Sets

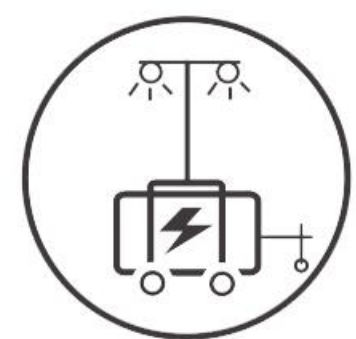

Lighting Towers



Hybrid Energy



Lithium-ion Battery
Energy Storage



Cold Chain Tech

WWW.MPMC-GROUP.COM



MPMC POWERTECH CORP.

SEMOKII® An MPMC Brand

✉ sales@semookii.com

🌐 www.semookii.com
www.mpmchybrid.com
www.mpmc-group.com

📍 No.2399 Fazhan Ave, Haimen Port New Area, Jiangsu 226156, China

MPMC Hybrid® - 2022 © All rights reserved

SEMOKII


SEMOKII

PORTABLE POWER STATION

FOR BRIGHTER SAFER AND MORE BEAUTIFUL LIFE

Multiple Application Scenarios

We believe in a diversified interpretation of life in which everyone is free from power shortage to explore their ways of lifestyle and own-beings. With its durable structure, reliable BMS, and battery energy management system, Semookii portable power station is a state-of-the-art lithium-ion battery powered generator as well as a backup/emergency power you can count on. From camping, tailgating, wildlife exploring, fishing to home backup power, work site power and disaster relief, Semookii portable power station is a remarkable choice for providing stable long lasting power and can be recharged by solar energy, car input and AC socket.

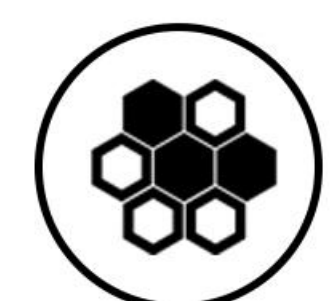

Modular Design



Renewable Energy




Safe & Reliable



Certified Products




Portable

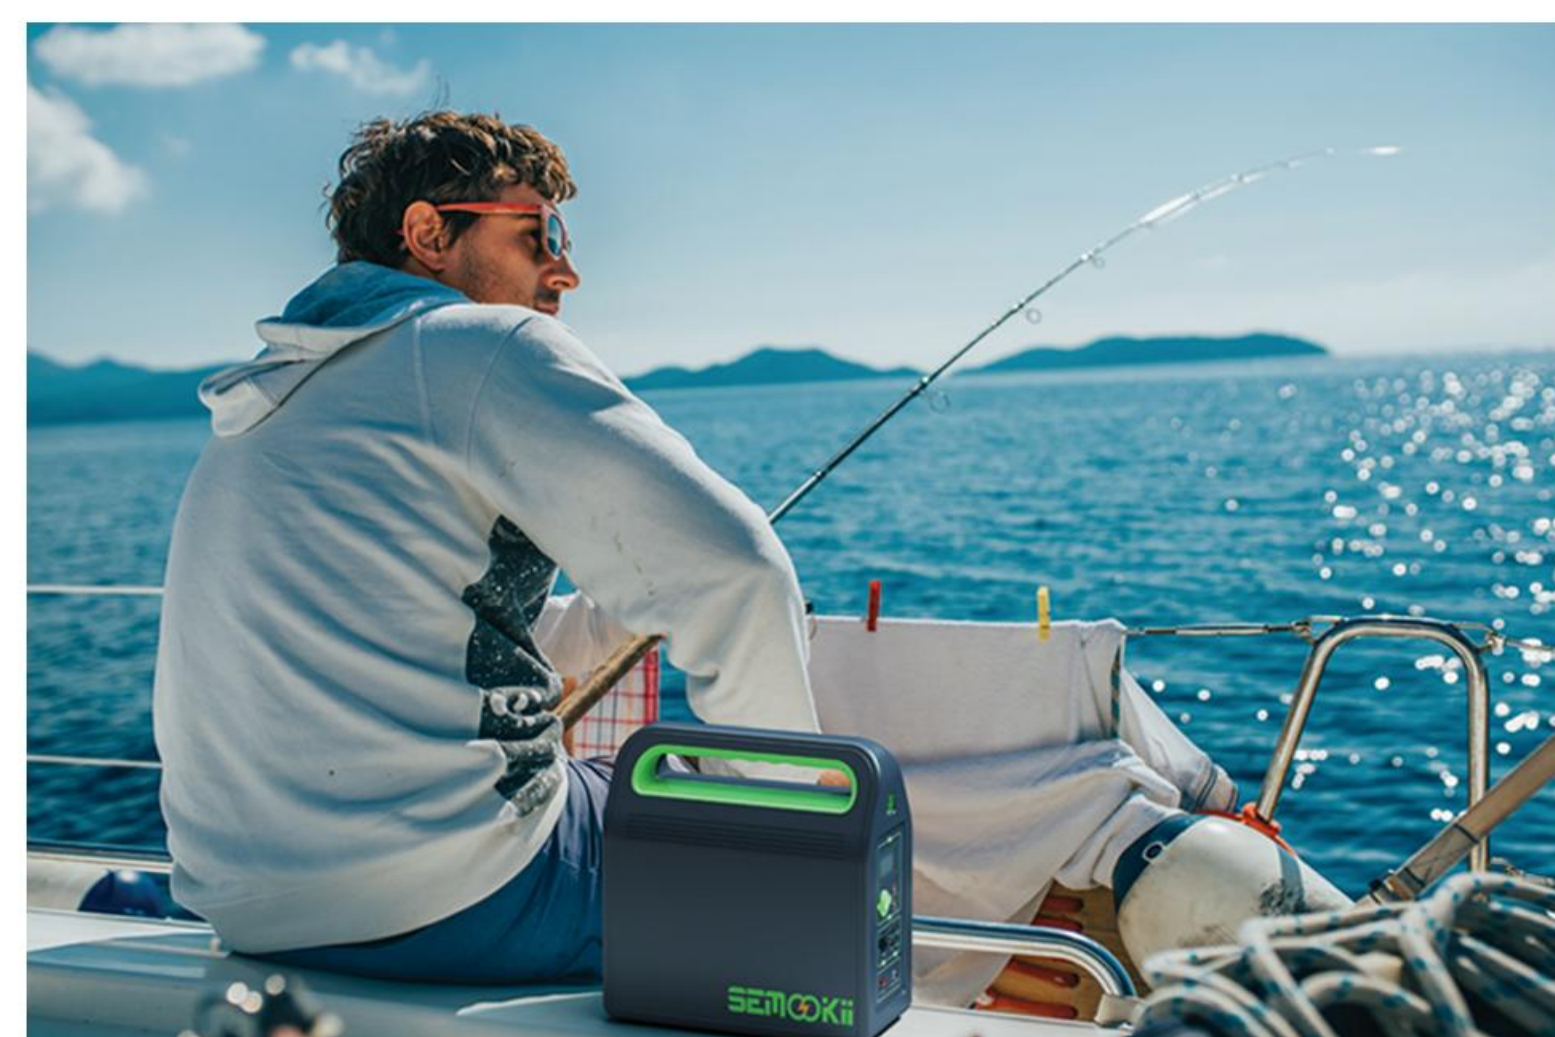

FISHING



CAMPING

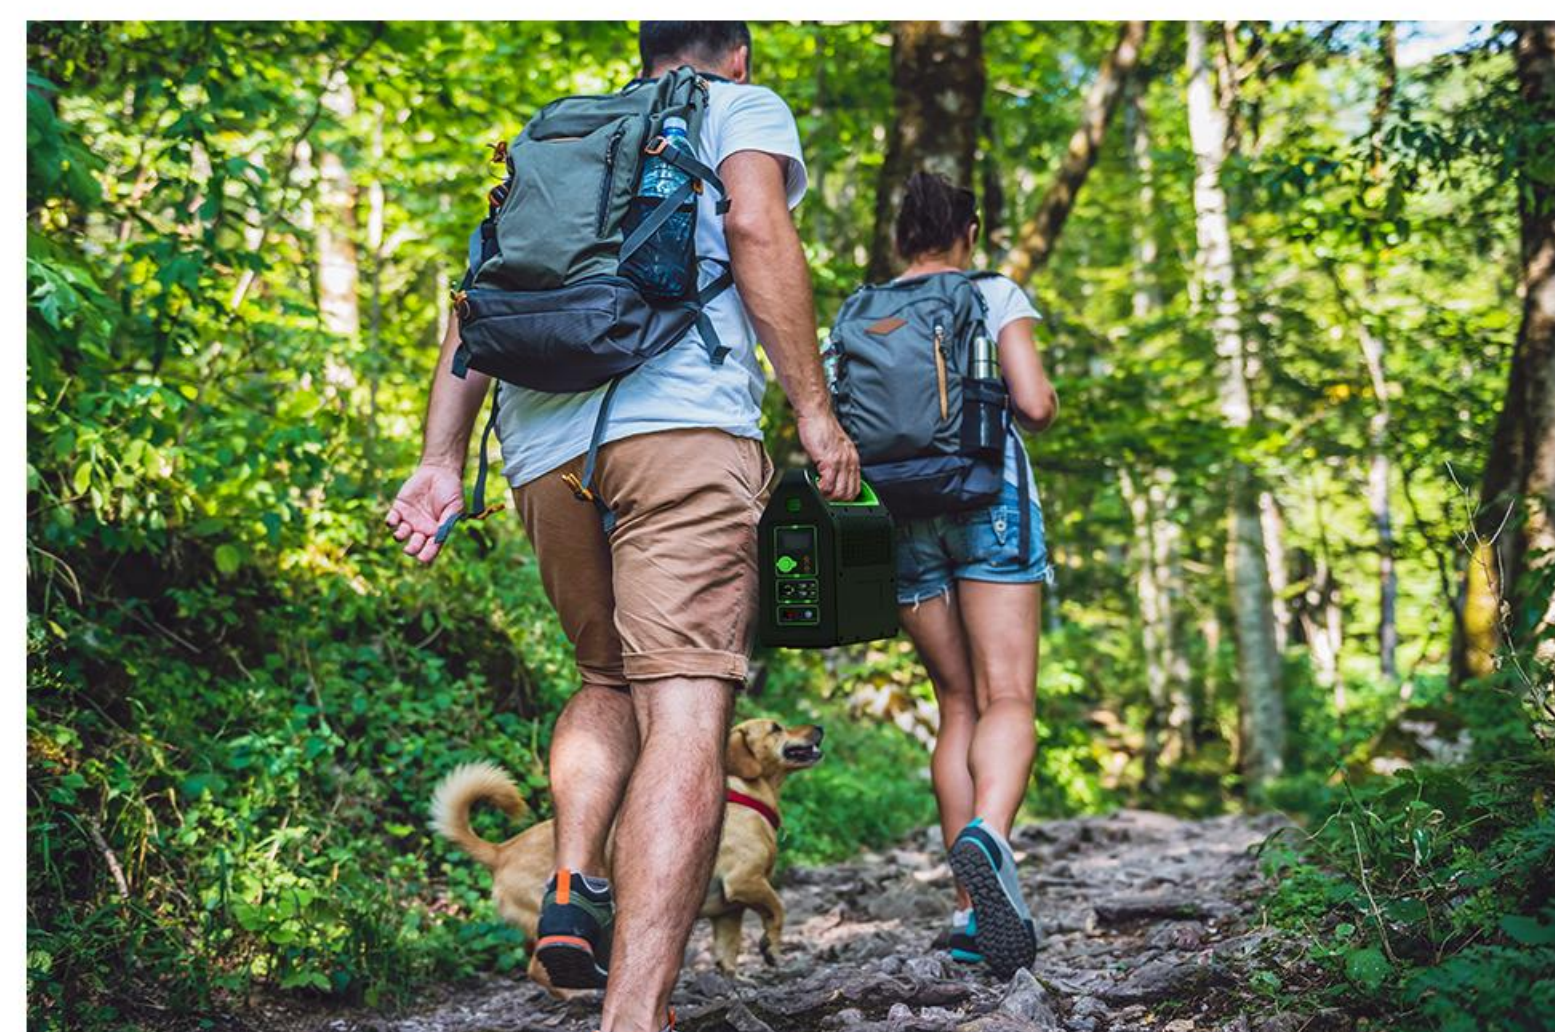

OFF ROAD



EMERGENCY

MORE RUN TIME



PPS-300



PPS-300 PRO



PPS-500



PPS-600



Laptop 50W

6

Hours



Drone

5

Charges



Camera

20-30

Charges



Mobile Phone

20-30

Charges



Refrigerator 60W

5

Hours



TV 60W

5

Hours



Breathing Machine 40W

8

Hours



IPAD 15W

20

Charges



Specification

Battery Storage	
Model	PPS-300
Capacity	288Wh
Recharge Time	5 hours
Cell Chemistry	Lithium-ion
Life Cycles	1000
Safety Fuse	Yes
Management System	Temperature control, Surge protection, Pure sine wave, Short circuit protection
Ports	
DC Input	17V/5A
USB-A Output	5V/2.4A
Type-C Output	60W(PD) 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A
DC1/DC2 Output	12V/3A
AC Output	110V/60Hz 300W
Car Output	12V/10A
Solar Input	17V/5A
General	
Size	260x90x264mm
Weight	3.55kg / 7.83lbs
Warranty	12 months
Operating Temperature	-10°C - 40°C
Charging Temperature	0°C - 40°C

*Certification: PSE, UL, FCC, CA65, CE, UN38.3, MSDS, GB/T 35590-2017



Specification

Battery Storage	
Model	PPS-600
Capacity	540Wh
Recharge Time	5 hours
Cell Chemistry	Lithium-ion
Life Cycles	1000
Safety Fuse	Yes
Management System	Temperature control, Surge protection, Pure sine wave, Short circuit protection
Ports	
DC Input	26V/4.75A
USB-A Output	18W
Type-C Output	60W(PD) 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A
DC1/DC2 Output	12V/4A
AC Output	110V/60Hz 600W
Car Output	12V/8A
Solar Input	12.5V-30V/4.75A MAX
General	
Size	285x131x297mm
Weight	5.6kg / 12.35lbs
Warranty	12 months
Operating Temperature	-10°C - 40°C
Charging Temperature	0°C - 40°C

*Certification: PSE, UL, FCC, CA65, CE, UN38.3, MSDS, GB/T 35590-2017

SEMOKii
Semookii PPS-300PRO



SEMOKii
Semookii PPS-500



Specification

Battery Storage	
Model	PPS-300PRO
Capacity	285Wh
Recharge Time	5 hours
Cell Chemistry	Lithium-ion
Life Cycles	1000
Safety Fuse	Yes
Management System	Temperature control, Surge protection, Pure sine wave, Short circuit protection
Ports	
DC Input	9-36V/5A
USB-A Output	18W
Type-C Output	60W(PD) 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A
DC1/DC2 Output	12V/5A
AC Output	110V/60Hz 300W
Car Output	12V/10A
Solar Input	17V/5A
Wireless Charging	10W
General	
Size	228x153x155mm
Weight	4.2kg / 9.26lbs
Warranty	12 months
Operating Temperature	-10°C~40°C
Charging Temperature	-10°C~40°C

*Certification: PSE, UL, FCC, CA65, CE, UN38.3, MSDS, GB/T 35590-2017

Specification

Battery Storage	
Model	PPS-500
Capacity	520Wh
Recharge Time	6 hours
Cell Chemistry	Lithium-ion
Life Cycles	1000
Safety Fuse	Yes
Management System	Temperature control, Surge protection, Pure sine wave, Short circuit protection
Ports	
DC Input	12-26V 10A MAX
USB-A Output	18W
Type-C Output	60W(PD) 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A
DC1/DC2 Output	12V/4A
AC Output	110V/60Hz 500W
Car Output	12V/10A
Solar Input	12-26V 10A MAX
Wireless Charging	10W
General	
Size	290x195x201mm
Weight	5kg / 11.02lbs
Warranty	12 months
Operating Temperature	-10°C - 40°C
Charging Temperature	0°C - 40°C

*Certification: PSE, UL, FCC, CA65, CE, UN38.3, MSDS, GB/T 35590-2017