


MODEL : AIO-10

HYBRID POWER STATION

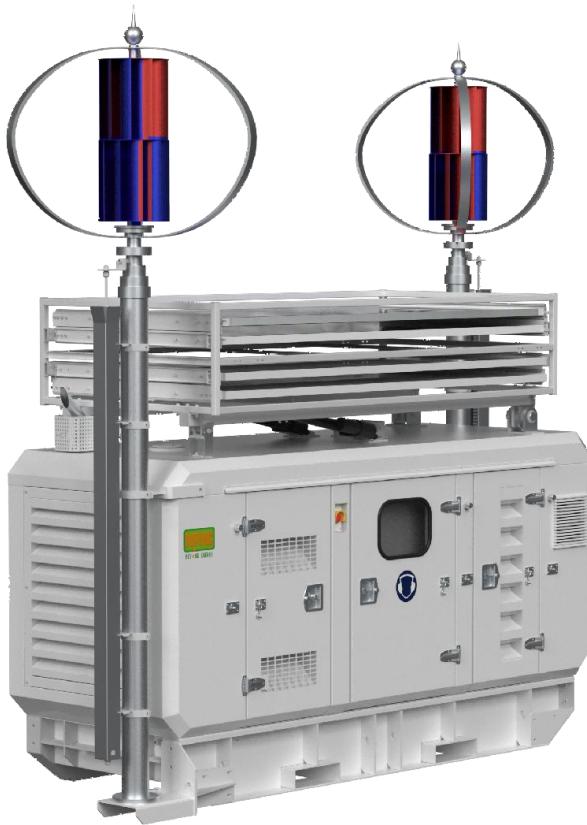

Design Standards

AIO® is a new range of secure integrated hybrid power station. With diesel generator, solar power, battery storage, wind turbine and hybrid solar Inverter in one secure unit.

AIO® is mainly developed for residents Power, Reduce the dependence on Main Power and decrease the consumption cost.

Benefits

- Integrated installation, convenient storage and transportation;
 - High return on investment and quick return;
 - Simple operation and easy maintenance;
 - Power and Capacity can be expanded, meet different user needs;
- Accept customer customization, suitable for various scenarios;


Warranty

- Battery Performance: 2000 cycles(80% DOD) or 2 years after manufacture;
- Generator: 18 months after manufacture or 1500 hours running time;



General Specification

Model	AIO-10
System Rated Output Power	10 kVA
Rated Output Voltage	400V/230V@50Hz/60Hz,3ph. (According to customer requirements)
Min.Battery Storage Capacity	10 kWh
Max.Battery Storage Capacity	25 kWh
Output Terminals	Copper terminals & CEE 16A/5P Socket
Expand Dimension(W*D*H)	4400*5400*7000mm
Loading Dimension(W*D*H)	3400*1150*2200mm
Net.Weight	2800kg
Loading Capacity of 40'HC	6 units
Discharge Temperature Range	-20°C~50°C

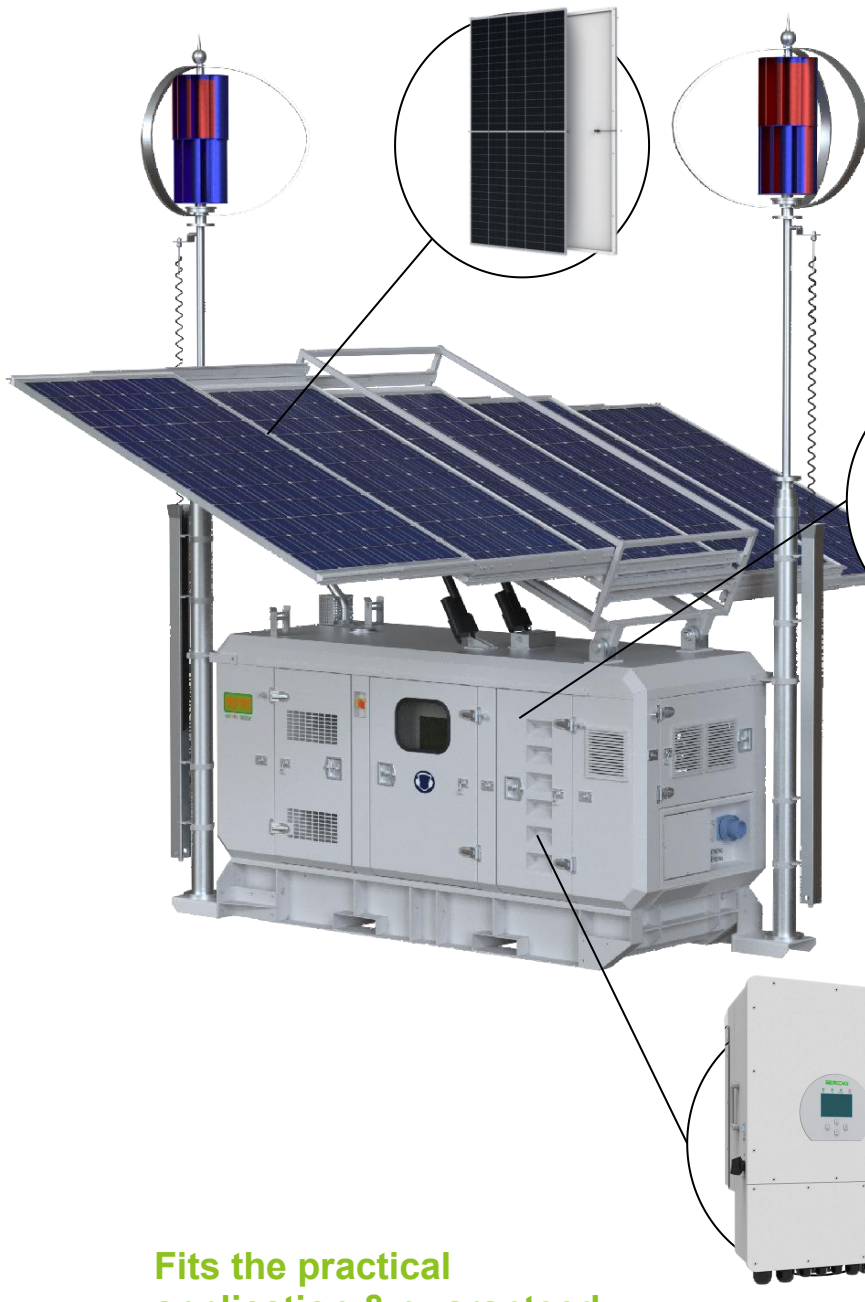


SOLAR PANEL

MAX.POWER:

2750_W

With HIGH EFFICIENCY

UP TO **21%~!!**

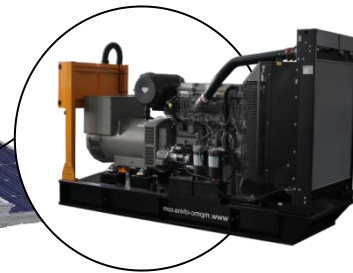

GENERATOR

RATED POWER: 7kW

With LOW CONSUMPTION

DOWN TO **2.6 L/H~!!**

INTELLIGENT INVERTER

ONE PIECE FOR
SOLAR & BATTERY
& **GRID**
& **GENERATOR**

Fits the practical application & guaranteed by high-quality manufacturing technology



Generator Set

Prime Power	9 kVA
Fuel Consumption	2.6 L/h@100% load
Fuel Type	Diesel(Nature Gas Engine for option)
Fuel Tank Capacity	36 hours
Base Functions	Automatic Start-up / Alarm / Automatic Stop / Emergency Stop / Load Management

Solar Panel

Maximum Power	550W
Power Tolerance	0~+5W
Qty.	5pcs

Energy storage battery

Cell Type	LFP(LiFePO4)
Pack Model	MF51100D
Pack Capacity	5 kWh
Pack Rated Voltage	51.2 VDC
Discharge Depth	90%
Charger/Discharge Current	97.7 A(1.0C)
Battery Rack Voltage	43.2V~59V
Rated Cycle Life	≥2000 (80% DOD)

Hybrid Inverter System

Solar Controller	MPPT*2 ways
AC Voltage Range	380~415Vac
Max.Charge/Discharge Current	210A
Max.Conversion Efficiency	97.6%
Rated Output Power	10kVA(0.8leading~0.8lagging)


Wind Turbine

Rated Power	400W*2pcs
Stand Running Condition	Start-up wind speed>2m/s;Rated wind speed>10m/s;Survival wind speed<45m/s

Options

Engine	Alternator	Fuel System	Hybrid Power Station
Water Jacket Preheater Oil Preheater Oil manual pump	PMG excitation Space heater Winding temperature measuring	12 / 24 hour base tank Bunded fuel tank External fuel tank Automatic fuel feeding Switch between external tank and base tank (three-way valve)	Deepsea, ComAp, Smartgen etc. controller Trailer Tools with the machine

Basic Logic

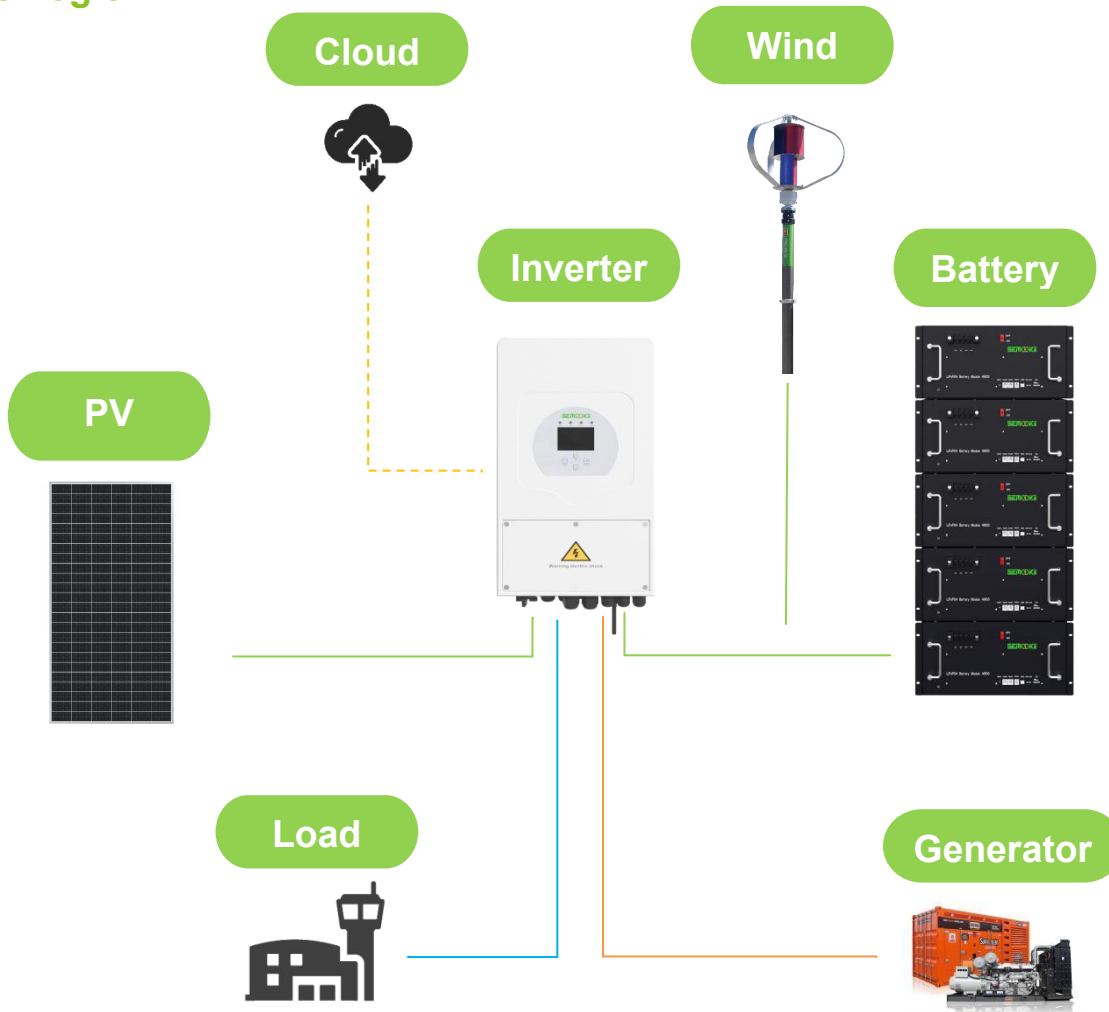

Power Priority	Highest	Secondary	Back Up
Functions	PV Take load/charge	Battery Take load	Generator Take load/charge



MPMC POWERTECH CORP.
sales@mpmc-china.com | www.mpmc-china.com

Photographs are for illustrative purposes only and may not reflect final specification.

Follow us

- <https://www.facebook.com/mpmcgroup>
- <https://www.linkedin.com/company/mpmcpowertech/>
- <https://www.youtube.com/user/MPMCGenerator>

All information in this document is substantially correct at time of printing and may be altered subsequently. Final weight and dimensions will depend on completed specification.