

	SK-5000A	SK-5000B
Measurement mode	Fully automatic/Automatic/Manual	
Corneal thickness measurement	Not support	Support Measurement range-CCT:400-800um Measurement increment-CCT:10um Light Source:Blue LED
Display	7-inch 1024*600 color touch screen, support up and down 180°, left and right 60° flip	
Fixation light	1 internal fixation light (green LED), 2 external fixation lights	
Measurement accuracy	1mmHg (0.133Kpa)	
Measurement range	0-60mmHg (0-8Kpa) Include automatic switching between 30/60mmHg	
Printer	Built-in thermal printer, automatic paper cutting	
Data output/input	Input: USB; Output:LAN/RS232C	
Size and weight	500*300*500; <25kg	

上海拓扑威实业有限公司
Shanghai Top View Industrial Co.,Ltd

Address: 9F,YONGDING PLAZA,3388#GONGHEXIN Rd,JINGAN DISTRICT, SHANGHAI,CHINA
Zip:200436

+86-021-61178155

+86 166 2152 2796

+86 166 2152 2796

+86 166 2152 2796



Lee-Sales Manager



www.shtopview.com

FULLY AUTOMATIC NON-CONTACT TONOMETER

QUICK SPEED
3D AUTO-TRACKING
AUTO MEASUREMENT
SOFT AIR PUFF, SAFTY,
PACHYMETER+TONOMETER




Non-contact tonometer

SK-5000A/B



ONE CLICK

FULLY
AUTOMATIC

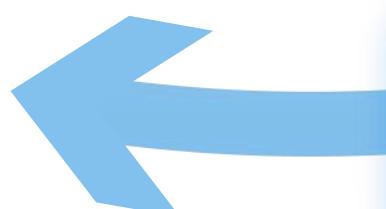

Print report
Auto paper cutting



Electric chin rest




SK-5000B supports corneal thickness measurement
More functions



Auto alignment
Auto focus



Fully automatic mode
One touch
You can get OS&OD data
It also supports semi-automatic/manual mode

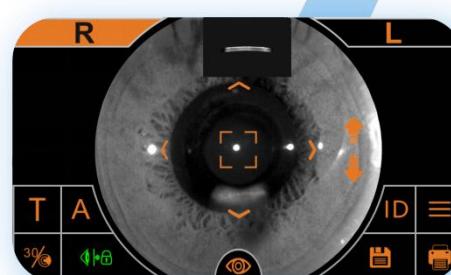

Corneal thickness measurement
Auto soft air puff



Support air puff detection after turn on
Support safety limit setting
Safer equipment use and operation



Auto switch OS&OD



7 inch color capacitive touch screen
Can be flip up and down 180 °
Flip right and left 60 °
Operation and observation are more convenient

