

	SK-5000A	SK-5000B
Measurement mode	Fully automatic/Automatic/Manual	
Corneal thickness measurement	Not support	Support Measurement range-CCT:400-800um Measurement increment-CCT:10um Light Source:Blue LED
Display	8-inch 1024*600 color touch screen support up and down 180° , left and right 60° flip	
Fixation light	internal fixation light, support	
Measurement accuracy	1mmHg(0.133Kpa)	
Measurement range	0-60mmHg (0-8Kpa) Include automatic switching between30/60mmHg	
Printer	Built-in thermal printer, automatic paper cutting	
Data output/input	Input:USB; Output:LAN/RS232C	
Size and weight	500*300*500; <25kg	

FULLY AUTOMATIC
NON-CONTACT TONOMETER

QUICK SPEED
3D AUTO-TRACKING
AUTO MEASUREMENT
SOFT AIR PUFF, SAFTY
PACHYMETER



NON-CONTACT
TONOMETER

SK-5000A/B



Electric chin rest




SK-5000B supports corneal thickness measurement
More functions



Auto alignment
Auto focus




Fully automatic mode
One touch
You can get OS&OD data
It also supports semi-automatic/manual mode

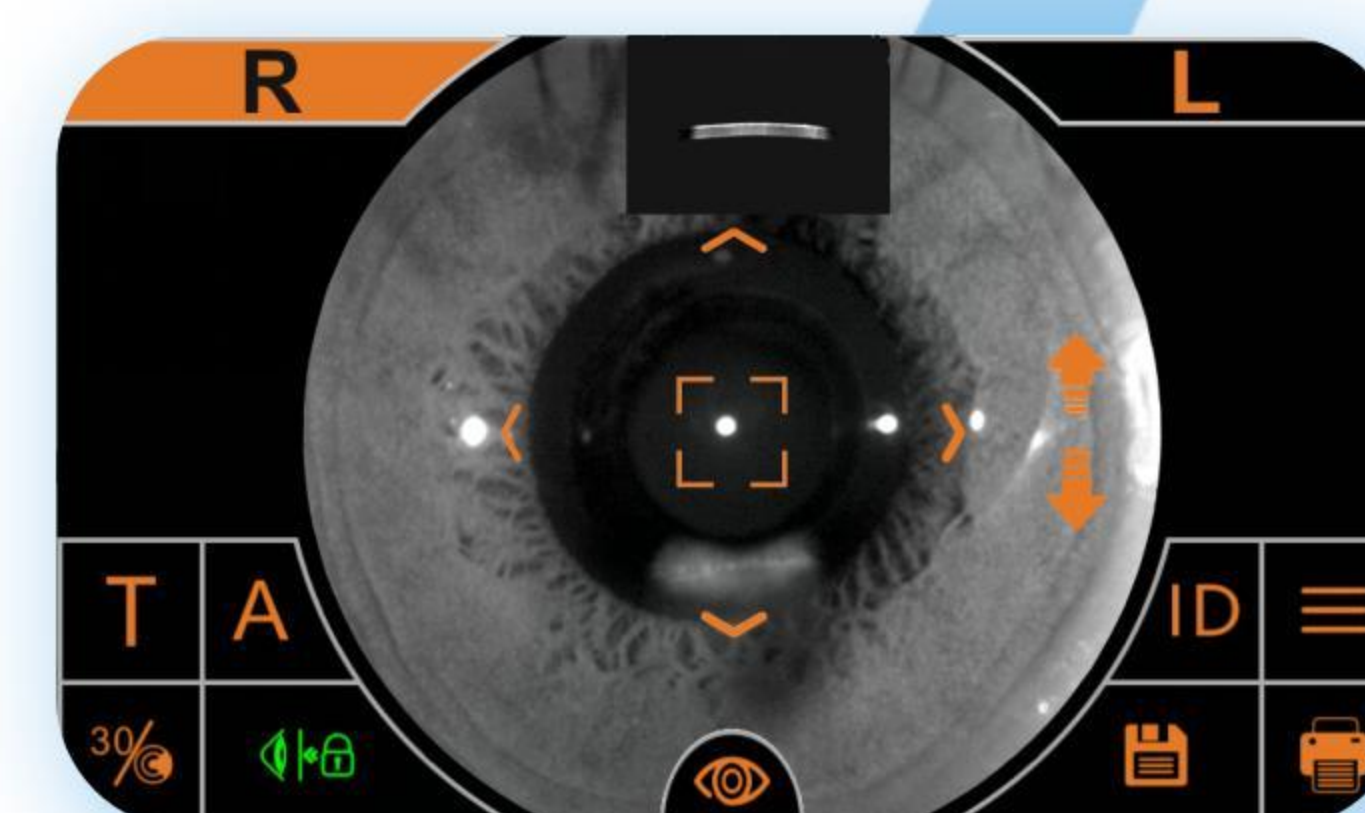

Corneal thickness measurement
Auto soft air puff



Support air puff detection after turn on
Support safety limit setting
Safer equipment use and operation

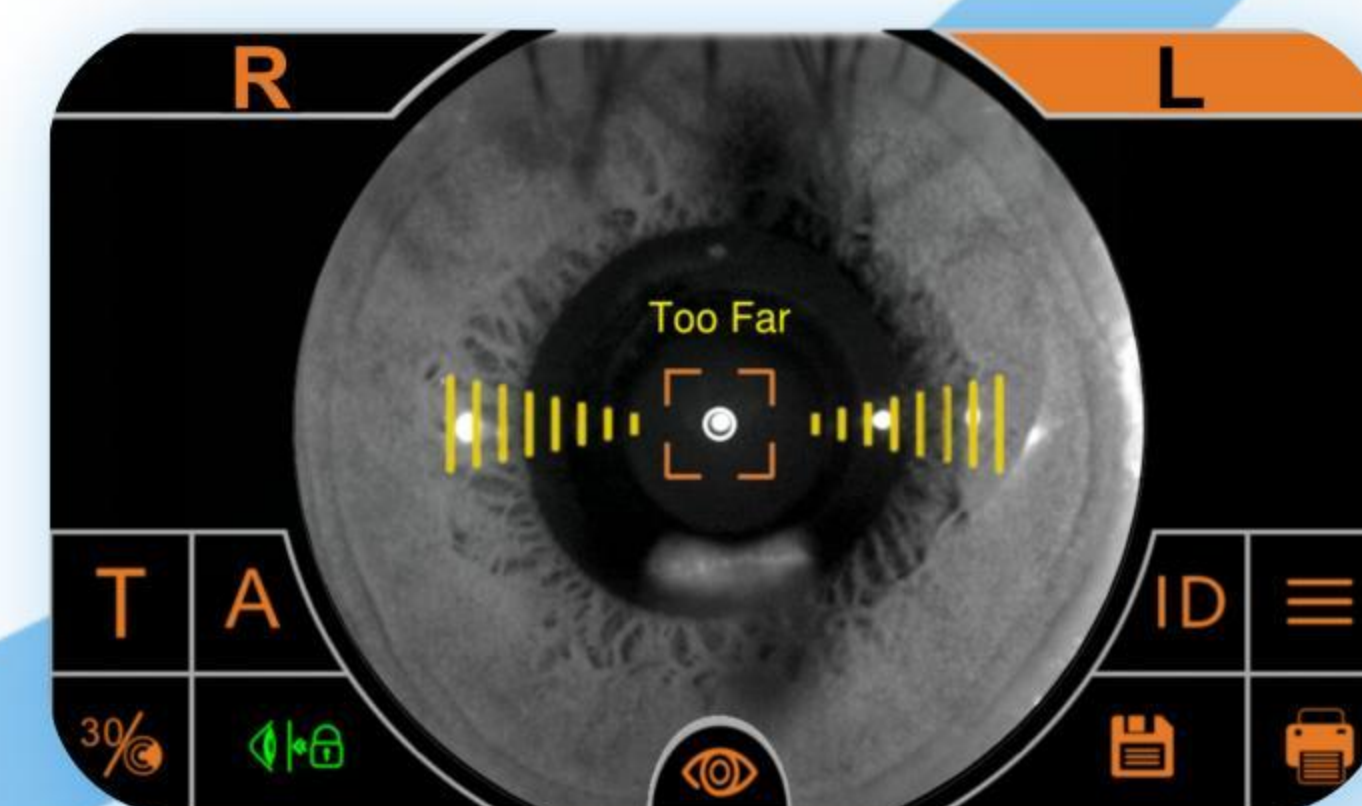

Auto switch OS&OD



Print report
Auto paper cutting



8 inch color capacitive touch screen
Can be flip up and down 180 °
Flip right and left 60°
Operation and observation are more convenient



ONE CLICK

FULLY AUTOMATIC

