

TECHNICAL DATA

SOLAR LIGHT TOWER



MPMC POWERTECH CORP.





SOLAR

HSL Series

HSL-1675A

Features

The solar light towers take the advantages of solar renewable energy and LED light systems on the road. Ideal for special events, construction sites, security and any other application where on-demand lighting is desired. This system provides cost-effective bright white LED lighting without all of the disadvantages inherent to diesel lighting systems – high operating costs (diesel fuel, maintenance, labor) as well as carbon emissions, noise, fumes and light pollution.

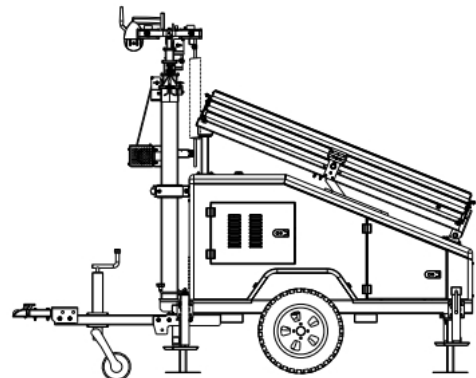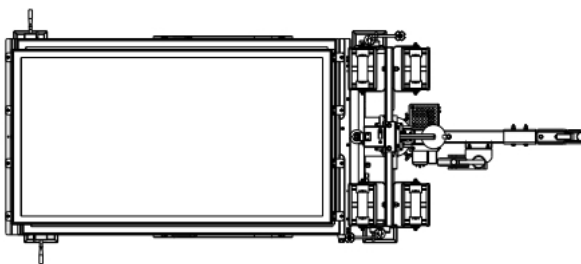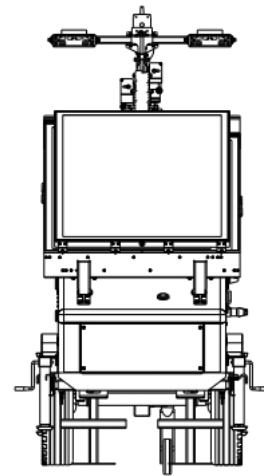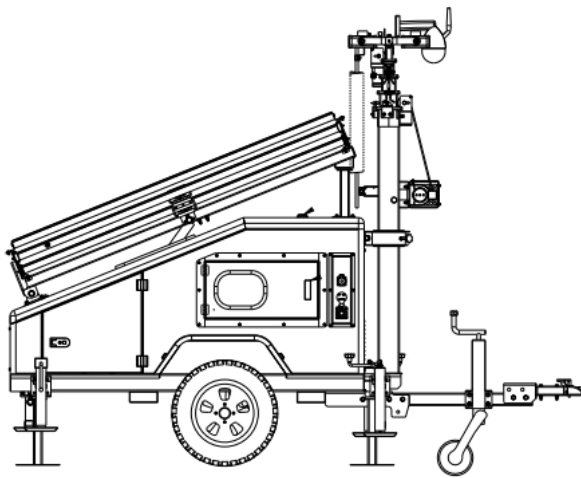

Dimension	
Model	HSL-1675A
Expanding Dimensions	3400*4950*7200 mm (LxWxH)
Loading Dimensions	2400*1150*2500 mm (LxWxH)
Weight	900 kg
Loading Capacity in 40 HQ	10 units

General Specification	
Rated voltage	DC24V
Rated Power (LED Lamp)	4 × 100W
Solar System Charge Time *	3.5 Hours
Lighting Discharge Time	12 Hours
Standby Generator Charge Time	4 Hours

Note: *Direct normal irradiation

DELTA ENERGY

Solar Panel			
Maximum Power（Pmax）	335W		
Maximum Power Voltage(Vmp)	37.6V		
Maximum Power Current（Imp）	8.91A		
Power Tolerance	0/+5 W		
Dimension	1988*992*40mm(L*W*H)		
Lifting angle	Fixed		
Extending type	Sliding		
Extending area	10m²		
Quantity	5pcs		
Battery Bank			
Type	Lead-acid battery		
Model	150AH 12V		
Voltage	12V (One battery)		
Maximum Charging Current	37.5A		
Quantity	4pcs		
LED Lamp			
Input Voltage	DC24V		
LED Power	100W		
Light Beam Angle	60°		
LED Luminous Efficiency	160lm/w		
Correlated Color Temperature	5000K		
Protection Class	IP67		
Quantity	4pcs		
Solar Charging Controller			
Model	TD4615TU		
Manufacturer	LDSOLAR		
Rated Current	40A		
Rated Voltage	24V		
Tracking efficiency	Max 98.5% (MPPT)		
Protection Function	Reverse connection Over voltage	Overcharging Over load	Over-discharging Short circuit.
Display Function	Battery Charging and discharging condition		
Light Load Model	a) Sensor Mode b) Timer and Sensor Mode c) Normal Mode		
Trailer			
Model	B900（Off road）		
Loading Capacity	900kg		
Pulling Speed	≤25km/h		

Tire and Rim Size	165R13
Drawing Bar	Ball Type
Stablished Supports	4 * Manual
Mast	
Mast Type	Electric
Maximum Lifting Heigh	7.2m
Mast Rotation	355°
Surface spraying	Galvanized
Option	
Backup Genset	Gas or Diesel
Battery Charger	AC220V—DC24V
Inverter	DC24V-AC220Vac
Cameras	WIFI or 4G type

Contact Us

MPMC POWERTECH CORP.

Add: 3rd Floor, Building 1, Powerlong City Plaza Pudong Shanghai China

Tel: +86 21 60970158 Fax: +86 21 60970155

E mail : sales@mpmc-china.com

Web site : www.mpmc-china.com



MPMC reserves the right to make changes in model, technical specification, color, configuration and accessories without prior notice.

Please contact the salesman before ordering.

DISTRIBUTED BY:

© 2022 by MPMC, All right reserved.