



复旦微电子

FM11NT041

***NFC Forum Type2 Tag compliant IC with
504 bytes user memory***

Datasheet

Sep. 2020

INFORMATION IN THIS DOCUMENT IS INTENDED AS A REFERENCE TO ASSIST OUR CUSTOMERS IN THE SELECTION OF SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD PRODUCT BEST SUITED TO THE CUSTOMER'S APPLICATION WHICH IS NOT LEGALLY BINDING AND SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD DOES NOT GUARANTEE THE AUTHENTICITY AND INTEGRITY OF THE INFORMATION. THE PRODUCT SPECIFICATIONS AND TECHNICAL PARAMETERS ARE SUBJECT TO THE ACTUAL PRODUCTS.

INFORMATION DO NOT CONVEY ANY LICENSE UNDER ANY INTELLECTUAL PROPERTY RIGHTS, OR ANY OTHER RIGHTS, BELONGING TO SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD OR A THIRD PARTY.

WHEN USING THE INFORMATION CONTAINED IN THIS DOCUMENTS, PLEASE BE SURE TO EVALUATE ALL INFORMATION AS A TOTAL SYSTEM BEFORE MAKING A FINAL DECISION ON THE APPLICABILITY OF THE INFORMATION AND PRODUCTS.

PURCHASERS ARE SOLELY RESPONSIBLE FOR THE CHOICE, SELECTION AND USE OF THE SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD PRODUCTS AND SERVICES DESCRIBED HEREIN, AND SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD ASSUMES NO LIABILITY WHATSOEVER RELATING TO THE CHOICE, SELECTION OR USE OF THE SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD PRODUCTS AND SERVICES DESCRIBED HEREIN. UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD REPRESENTATIVE, SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE.

FUTURE ROUTINE REVISIONS WILL OCCUR WHEN APPROPRIATE, WITHOUT NOTICE. CONTACT SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD SALES OFFICE TO OBTAIN THE LATEST SPECIFICATIONS AND BEFORE PLACING YOUR PRODUCT ORDER. PLEASE ALSO PAY ATTENTION TO INFORMATION PUBLISHED BY SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD BY VARIOUS MEANS, INCLUDING SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD HOME PAGE ([HTTP://WWW.FMSH.COM](http://www.fms.com)).

PLEASE CONTACT SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD LOCAL SALES OFFICE FOR THE SPECIFICATION REGARDING THE INFORMATION IN THIS DOCUMENT OR SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD PRODUCTS.

Trademarks

Shanghai Fudan Microelectronics Group Co., Ltd name and logo, the “复旦” logo are trademarks or registered trademarks of Shanghai Fudan Microelectronics Group Co., Ltd or its subsidiaries in China.

Shanghai Fudan Microelectronics Group Co., Ltd, Printed in the China, All Rights Reserved.



Contents

CONTENTS	3
1 PRODUCT OVERVIEW	4
1.1 INTRODUCTION.....	4
1.2 FEATURES	4
1.2.1 RF Interface	4
1.2.2 EEPROM	4
1.2.3 NFC Forum Tag 2 Type compliance.....	4
1.2.4 Security	5
1.3 BLOCK DIAGRAM	6
1.4 PIN DESCRIPTION	6
1.4.1 Bumping Pin Description.....	6
1.4.2 DFN4	7
1.4.3 SD function	7
2 FUNCTIONAL DESCRIPTION	8
2.1 GENERAL DESCRIPTION	8
2.2 MEMORY ORGANIZATION	8
2.2.1 UID	9
2.2.2 Lock bytes	9
2.2.3 CC bytes.....	11
2.2.4 Initial memory configuration	11
2.2.5 Configuration block.....	11
2.3 SPECIAL FUNCTION	13
2.3.1 Read times counter.....	13
2.3.2 Password protection	13
2.4 COMMAND SET	13
2.4.1 READ.....	14
2.4.2 FAST_READ	14
2.4.3 WRITE.....	15
2.4.4 READ_CNT.....	15
2.4.5 PWD_AUTH	16
2.4.6 ACK and NAK.....	16
3 CHARACTERISTICS	18
3.1 LIMITING VALUES.....	18
3.2 WORKING CONDITION	18
3.3 ELECTRICAL CHARACTERISTICS	18
3.4 EEPROM CHARACTERISTICS	18
4 PACKAGE INFORMATION	19
4.1 DFN4.....	19
5 ORDERING INFORMATION	20
REVISION HISTORY	21
SALES AND SERVICE	22



1 Product Overview

1.1 Introduction

FM11NT041 is primarily designed for NFC Forum Type 2 Tag applications. Please consult Fudan Microelectronics Company for more documents.

1.2 Features

1.2.1 RF Interface

- ISO/IEC 14443A
- Contactless transmission of data and supply energy (no battery needed)
- Operating distance: up to 100 mm (depending on various parameters as e.g. field strength and antenna geometry)
- Operating frequency: 13.56 MHz
- Fast data transfer: 106 Kbit/s
- High data integrity: 16-bit CRC, parity, bit coding, bit counting
- 7 byte UID (cascade level 2 according to ISO/IEC 14443-3)
- Fast read command
- Read times counter function

1.2.2 EEPROM

- user memory: 540 bytes (135 pages)
- 4 bytes initialized capability container with one time programmable access bits
- Field programmable read-only locking function per page for the first 16 pages
- Field programmable read-only locking function above the first 16 pages per 16 pages
- Data retention of 10 years
- Write endurance 1,000,000 cycles

1.2.3 NFC Forum Tag 2 Type compliance

FM11NT041 provides full compliance to the NFC Forum Type 2 Tag technical specification and enables NDEF data structure configuration.



1.2.4 Security

- Manufacturer programmed 7-byte UID for each chip
- Anti-tearing support for capability container (CC) and lock bits
- Field programmable read-only locking function

1.3 Block Diagram

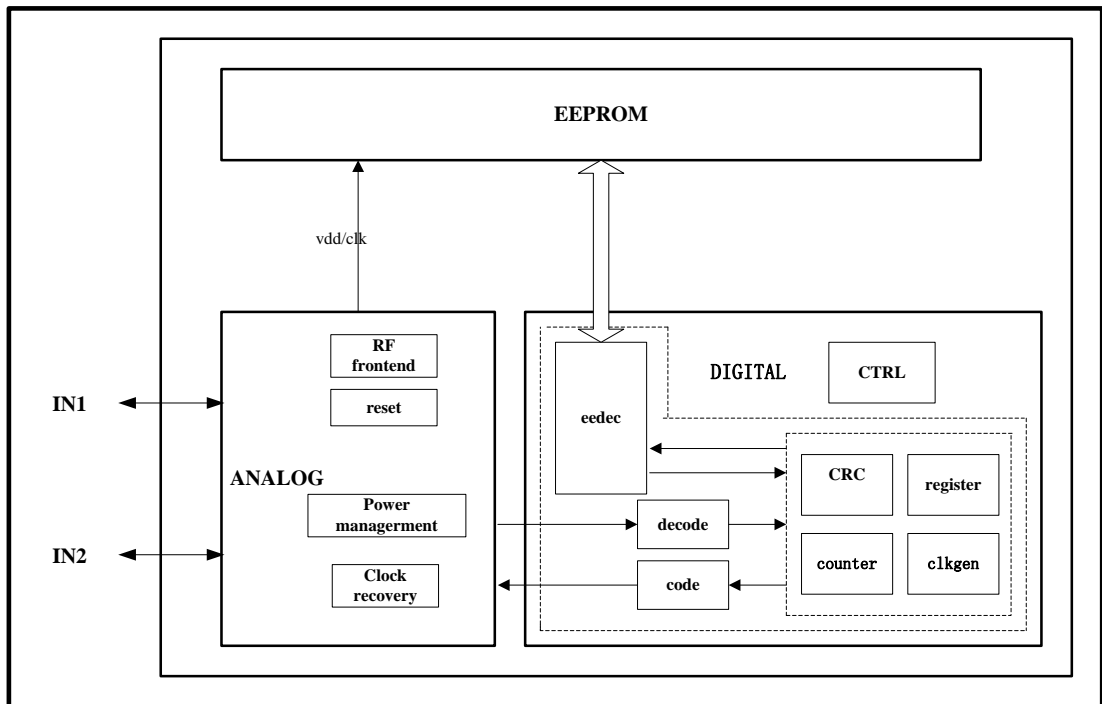


Figure 1-1 FM11NT041 Block diagram

1.4 Pin Description

1.4.1 Bumping Pin Description

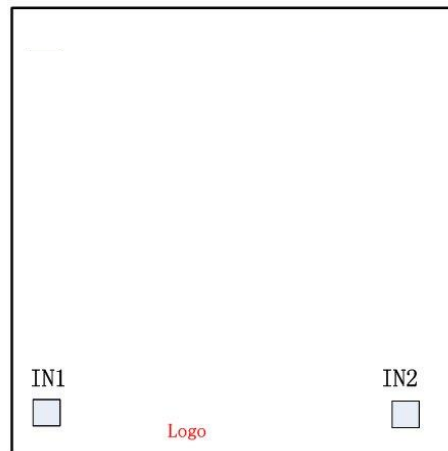


Figure 1-2 Bumping Pin Description

Number	Pin name	Description
1	IN1	Antenna Connection
2	IN2	Antenna Connection

1.4.2 DFN4

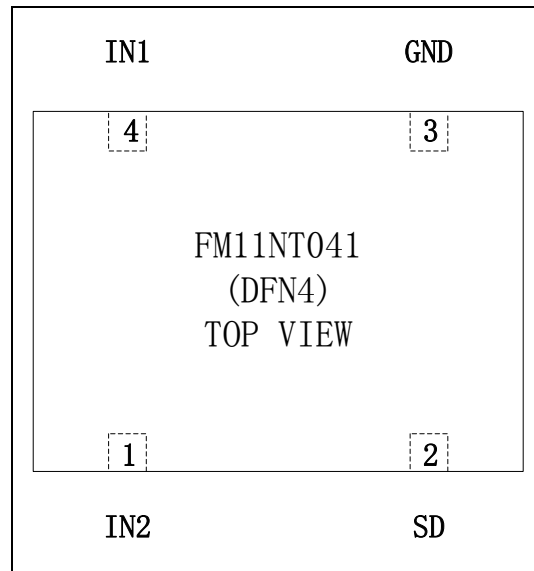


Figure 1-3 DFN4 Pin Description

Number	Bumping pin name	Description
1	IN2	Antenna Connection
2	SD	Selected detection signal output, open drain
3	GND	Ground pin
4	IN1	Antenna Connection

1.4.3 SD function

FM11NT041 has chip selected detection function. SD pin is open drain and a pull up resistor is needed. When the chip is selected by the reader, the SD pin will change from high to low. This signal can be used to wake up an off-chip MCU.



2 Functional Description

2.1 General Description

FM11NT041 chip has an 540 bytes EEPROM memory embedded. FM11NT041 contains the RF-Interface and the Digital Control Unit. Energy and data are transferred via an antenna, which consists of a coil with a few turns directly connected to the IN1 and IN2 of the FM11NT041.

2.2 Memory Organization

- EEPROM: 540 bytes, organized in 135 pages of 4 byte per page.
 - 4 bytes available as capability container
 - 504 bytes user programmable read/write memory

Table 2-1 FM11NT041 Memory organization



Page No		Byte Number inside a page			
DEC	HEX	0	1	2	3
0	0h	Serial Number			
1	1h	Serial Number			
2	2h	Serial Number	Internal	Lock Byte	Lock Byte
3	3h	Capability Container (CC)			
4	4h	TLV			
5	5h	Static Data Area (Page 4-15)			
...	...	Dynamic Data Area (Page 16-129, Total 114Pages)			
15	Fh	Dynamic Lock Bytes			
16	10h	RFU	RFU	RFU	AUTH0
...	...	ACCESS	RFU		
130	82h	PWD			
131	83h	PACK		RFU	
132	84h				
133	85h				
134	86h				

2.2.1 UID

The unique 7 byte serial number (UID) and its two Block Check Character Bytes (BCC) are programmed into the first 9 bytes of the memory. It covers page 00h, page 01h and the first byte of page 02h. The second byte of page 02h is reserved for internal data. Due to security and system requirements these bytes are write-protected after the programming during the IC production.

According to ISO/IEC 14443-3, BCC0 is defined as CT SN0 SN1 SN2. An ABBREVIATION CT stays for Cascade Tag byte (88h) and BCC1 is defined as SN3 SN4 SN5 SN6. SN0 holds the Manufacturer ID for Fudan Microelectronics (1Dh) according to ISO/IEC 14443-3 and ISO/IEC 7816-6 AMD.1.

2.2.2 Lock bytes

Lock bytes enable the user to lock parts of the complete memory area for writing. A Read from user memory area cannot be restricted via lock bytes functionality. The lock bytes functionality is enabled with a WRITE command, where 2 out of 4 bytes transmitted are used for setting the lock bytes.

2.2.2.1 Static Lock

The bits of byte 2 and byte 3 of page 02h represent the field programmable read-only locking

mechanism. Each page from 03h (CC) to 0Fh can be individually locked by setting the corresponding locking bit Lx to logic 1 to prevent further write access. After locked, the corresponding page becomes read-only memory.

The three least significant bits of lock byte 0 are the block-locking bits. Bit 2 deals with pages 0Ah to 0Fh, bit 1 deals with pages 04h to 09h and bit 0 deals with page 03h (CC). Once the block-locking bits are set, the locking configuration for the corresponding memory area is frozen.

Table 2-2 Lock0 (Block 02, Byte2)

BIT	7 (MSB)	6	5	4	3	2	1	0 (LSB)
Locked Block Number (Decimal)	7	6	5	4	CC	BL 15~10	BL 9~4	BL CC

Table 2-3 Lock1 (Block 02, Byte3)

BIT	7 (MSB)	6	5	4	3	2	1	0 (LSB)
Locked Block Number (Decimal)	15	14	13	12	11	10	9	8

For example if BL15-10 is set to logic 1, then bits L15 to L10 (lock byte 1, bit [7:2]) can no longer be changed. The so called static locking and block-locking bits are set by a WRITE command to page 02h. Bytes 2 and 3 of the WRITE command and the contents of the lock bytes are bit-wise OR'ed and the result then becomes the new content of the lock bytes. This process is irreversible. If a bit is set to logic 1, it cannot be changed back to logic 0. The contents of bytes 0 and 1 of page 02h are unaffected by the corresponding data bytes of the WRITE command. The default value of the static lock bytes is 0000h. Any write operation to the static lock bytes is tearing-proof.

2.2.2.2 Dynamic Lock

The dynamic lock bytes are used to lock the pages starting at page address 10h. The lock bytes are located at page 82h. The three lock bytes cover the memory area of 456 data bytes for FM11NT041. The granularity is 2 pages.

The default value of the dynamic lock bytes is 00 00 00h. The value of Byte 3 is always BDh when read. Any write operation to the dynamic lock bytes is tearing-proof.

2.2.3 CC bytes

The Capability Container CC (page 3) is programmed according to the NFC Forum Type 2 Tag specification Ref. 8. You can change these bytes by a WRITE command.

The content that needs to be written in will be OR'ed with the current contents of the CC bytes. The result will replace the old contents in CC area. This process is irreversible. If a bit is set to "1", it cannot be changed back to "0" again.

2.2.4 Initial memory configuration

The page 03h, 04h and 05h of FM11NT041 are initialized according to the NFC Forum Type 2 Tag specification.

Table 2-4 Initial memory organization of FM11NT041

Page Address	Byte0	Byte1	Byte2	Byte3
03h	E1h	10h	3Eh	00h
04h	03h	00h	FEh	00h
05h	00h	00h	00h	00h

2.2.5 Configuration block

2.2.5.1 Overview

FM11NT041's 83h~86h store the configuration information:

Table 2-5 Configuration area

Page address	Byte0	Byte1	Byte2	Byte3
83h	RFU	RFU	RFU	AUTH0
84h	ACCESS	RFU	RFU	RFU
85h	PWD			
86h	PACK		RFU	RFU

2.2.5.2 ACCESS

Table 2-6 Access byte

Name: ACCESS			
Field	Description	Reset	Access
7	PROT Definition of what will be protected by the password ◇ 0: Write operation need password check firstly ◇ 1: Write and read operation all need password check firstly	0	RW
6	CFGLOCK The lock bits of the configuration area (only lock the lowest 2 pages)	0	RW



Name: ACCESS			
Field	Description	Reset	Access
	<ul style="list-style-type: none"> ◇ 0: The configuration area can be changed ◇ 1: The configuration area cannot be changed permanently 		
5	RFU		
4	NFC_CNT_EN <ul style="list-style-type: none"> ◇ 0: Counter function is disabled ◇ 1: Counter function is enabled 	0	RW
3	NFC_CNT_PWD_PROT <ul style="list-style-type: none"> ◇ 0: Counter function is not protected by the password ◇ 1: Counter function is under the protection of the password 	0	RW
2:0	AUTHLIM The up limit of the password check error times <ul style="list-style-type: none"> ◇ 000: no limit ◇ 001-111: the maximum times of the check error 	3'b000	RW

2.2.5.3 AUTH0

Table 2-7 AUTH0

Name: AUTH0			
Field	Description	Reset	Access
7:0	AUTH0 Definition of the start page address which need to be protected by the password	8'hFF	RW

2.2.5.4 PWD

Table 2-8 PWD

Name: PWD			
Field	Description	Reset	Access
31:0	PWD 32bits password, unreadable in the user mode It is recommended to set the PWD under the protection of AUTH0	32'hFFFFFFFF	RW

2.2.5.5 PACK

Table 2-9 PACK Byte

Name: PACK			
Field	Description	Reset	Access
15:0	PACK	16'h0000	RW

	<p>The response of password verification PACK will be sent back when the password in PWD_AUTH command is the same to the stored password. Otherwise, NAK will be sent back.</p> <p>It is recommended to set the PACK under the protection of AUTH0.</p>		
--	---	--	--

2.3 Special Function

2.3.1 Read times counter

FM11NT041 has a read times counter function. Once the tag is read by the READ command or FAST-READ command, the 24bits counter's value will be added automatically.

This function can be enabled or disabled with the NFC_CNT_EN bit. The actual counter value can be read by READ_CNT command.

The reading of the Counter can also be protected with the password authentication. The Counter password protection is enabled or disabled with the NFC_CNT_PWD_PROT bit.

2.3.2 Password protection

The read and write authority to the specific address of the memory can be controlled by the password which stored in the EEPROM (4bytes). The response which is 2 bytes is also stored in the EEPROM. User can change them all by themselves.

AUTHLIM is used to define the up limit of the failed password check times. If the error times is out of the limit value, the chip will not response to the check request anymore.

AUTH0's default value is FFh that main the password protection function has been shutdown. User can turn it on after the configuration. The memory of EEPROM will be protected by the password whose address is starting from the AUTH0.

2.4 Command set

FM11NT041's command is following ISO/IEC14443-A.

Table 2-10 Command overviews

Command	Command code (hexadecimal)
Request	26h (7 bit)
Wake-up	52h (7 bit)
Anticollision CL1	93h 20h



Select CL1	93h 70h
Anticollision CL2	95h 20h
Select CL2	95h 70h
Halt	50h 00h
READ	30h
FAST_READ	3Ah
WRITE	A2h
READ_CNT	39h
PWD_AUTH	1Bh

2.4.1 READ

The READ command is used to read 16bytes data from the memory of FM11NT041 at a time. The data is the 4 pages that start from the address in the command's parameter.

Table 2-11 READ command

Name	Code	Description	Length
Cmd	30h	read four pages	1 byte
Addr	-	start page address	1 byte
CRC	-	CRC according to ISO/IEC14443	2 bytes
Data	-	Data content of the addressed pages	16 bytes
NAK	see Table 2-21	see Section 2.4.6	4-bit

The timing is according to ISO/IEC 14443-3 frame specification.

Table 2-12 READ timing

	$T_{ACK/NAK \text{ min}}$	$T_{ACK/NAK \text{ max}}$	$T_{TimeOut}$
READ	n=9	$T_{TimeOut}$	5 ms

2.4.2 FAST_READ

The FAST_READ command is used to read more than 16bytes data quickly. The data is all of the pages between the start address and the end address.

Table 2-13 FAST_READ command

Name	Code	Description	Length
Cmd	3Ah	read multiple pages	1 byte
StartAddr	-	start page address	1 byte
EndAddr	-	end page address	1 byte



CRC	-	CRC according to ISO/IEC14443	2 bytes
Data	-	data content of the addressed pages	n*4 bytes
NAK	see Table 2-21	see Section 2.4.6	4-bit

The timing is according to ISO/IEC 14443-3 frame specification.

Table 2-14 FAST_READ timing

	$T_{ACK/NAK}$ min	$T_{ACK/NAK}$ max	$T_{TimeOut}$
FAST_READ	n=9	$T_{TimeOut}$	5 ms

2.4.3 WRITE

The WRITE command is used to writes 4 bytes of data into the addressed FM11NT041's page.

Table 2-15 WRITE command

Name	Code	Description	Length
Cmd	A2h	write one page	1 byte
Addr	-	page address	1 byte
CRC	-	CRC according to ISO/IEC14443	2 bytes
Data	-	data	4 bytes
NAK	see Table 2-21	see Section 2.4.6	4-bit

The timing is according to ISO/IEC 14443-3 frame specification.

Table 2-16 WRITE timing

	$T_{ACK/NAK}$ min	$T_{ACK/NAK}$ max	$T_{TimeOut}$
FAST_READ	n=9	$T_{TimeOut}$	5 ms

2.4.4 READ_CNT

The READ_CNT command is used to read out the current value of the 24 bits counter.

Table 2-17 READ_CNT command

Name	Code	Description	Length
Cmd	39h	read counter	1 byte
Addr	02h	page address	1 byte



CRC	-	CRC according to ISO/IEC14443	2 bytes
Data	-	counter value	3 bytes
NAK	see Table 2-21	see Section 2.4.6	4-bit

The timing is according to ISO/IEC 14443-3 frame specification.

Table 2-18 READ_CNT timing

	$T_{ACK/NAK}$ min	$T_{ACK/NAK}$ max	$T_{TimeOut}$
READ_CNT	n=9	$T_{TimeOut}$	5 ms

2.4.5 PWD_AUTH

PWD_AUTH is used to check the password which protects the area defined by AUTH0.

Table 2-19 PWD_AUTH command

Name	Code	Description	Length
Cmd	1Bh	password authentication	1 byte
Addr	-	password	4 bytes
CRC	-	CRC according to ISO/IEC14443	2 bytes
Data	-	password authentication acknowledge	2 bytes
NAK	see Table 2-21	see Section 2.4.6	4-bit

The timing is according to ISO/IEC 14443-3 frame specification.

Table 2-20 PWD_AUTH timing

	$T_{ACK/NAK}$ min	$T_{ACK/NAK}$ max	$T_{TimeOut}$
READ_CNT	n=9	$T_{TimeOut}$	5 ms

2.4.6 ACK and NAK

FM11NT041 uses a 4 bit ACK / NAK:

Table 2-21 ACK and NAK values

Code (4-bit)	ACK/NAK
--------------	---------



Ah	Acknowledge (ACK)
0h	NAK for invalid argument (i.e. invalid page address)
1h	NAK for parity or CRC error
4h	NAK for invalid authentication counter overflow
5h	NAK for EEPROM write error

FM11NT041 replies to a Select CL2 command with 44h which is transmitted with the least significant byte first.

3 Characteristics

3.1 Limiting values

Parameter	Min	Max	Unit
storage temperature	-55	+125	°C
input current (IN1 to IN2)	-	±30	mA
ESD (HBM) 【2】	-	±4	KV

Table 3-1 FM11NT041 Limiting values 【1】

【1】 Stresses above one or more of the limiting values may cause permanent damage to the device.

【2】 Human body model: C = 100 pF, R = 1.5 k

3.2 Working Condition

Symbol	Parameter	Min	Typ	Max	Unit
T _A	Temperature	-40	+25	+85	°C
H _A	Field strength	1.5		7.5	A/M

Table 3-2 FM11NT041 Working Condition

3.3 Electrical characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f _i	input frequency		13.553	13.56	13.567	MHz
C _i	input capacitance 【1】	Between IN1 and IN2		50		pF

Table 3-3 Electrical characteristics

【1】 Measured with Agilent E5061B, the frequency is 13.56MHz, RMS voltage is 0.707V.

3.4 EEPROM characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
t _{ret}	retention time	T _{amb} = 55°C	10			year
N _{endu(W)}	write endurance	T _{amb} = 25°C	1,000,000			cycle

Table 3-4 EEPROM characteristics

4 Package information

4.1 DFN4


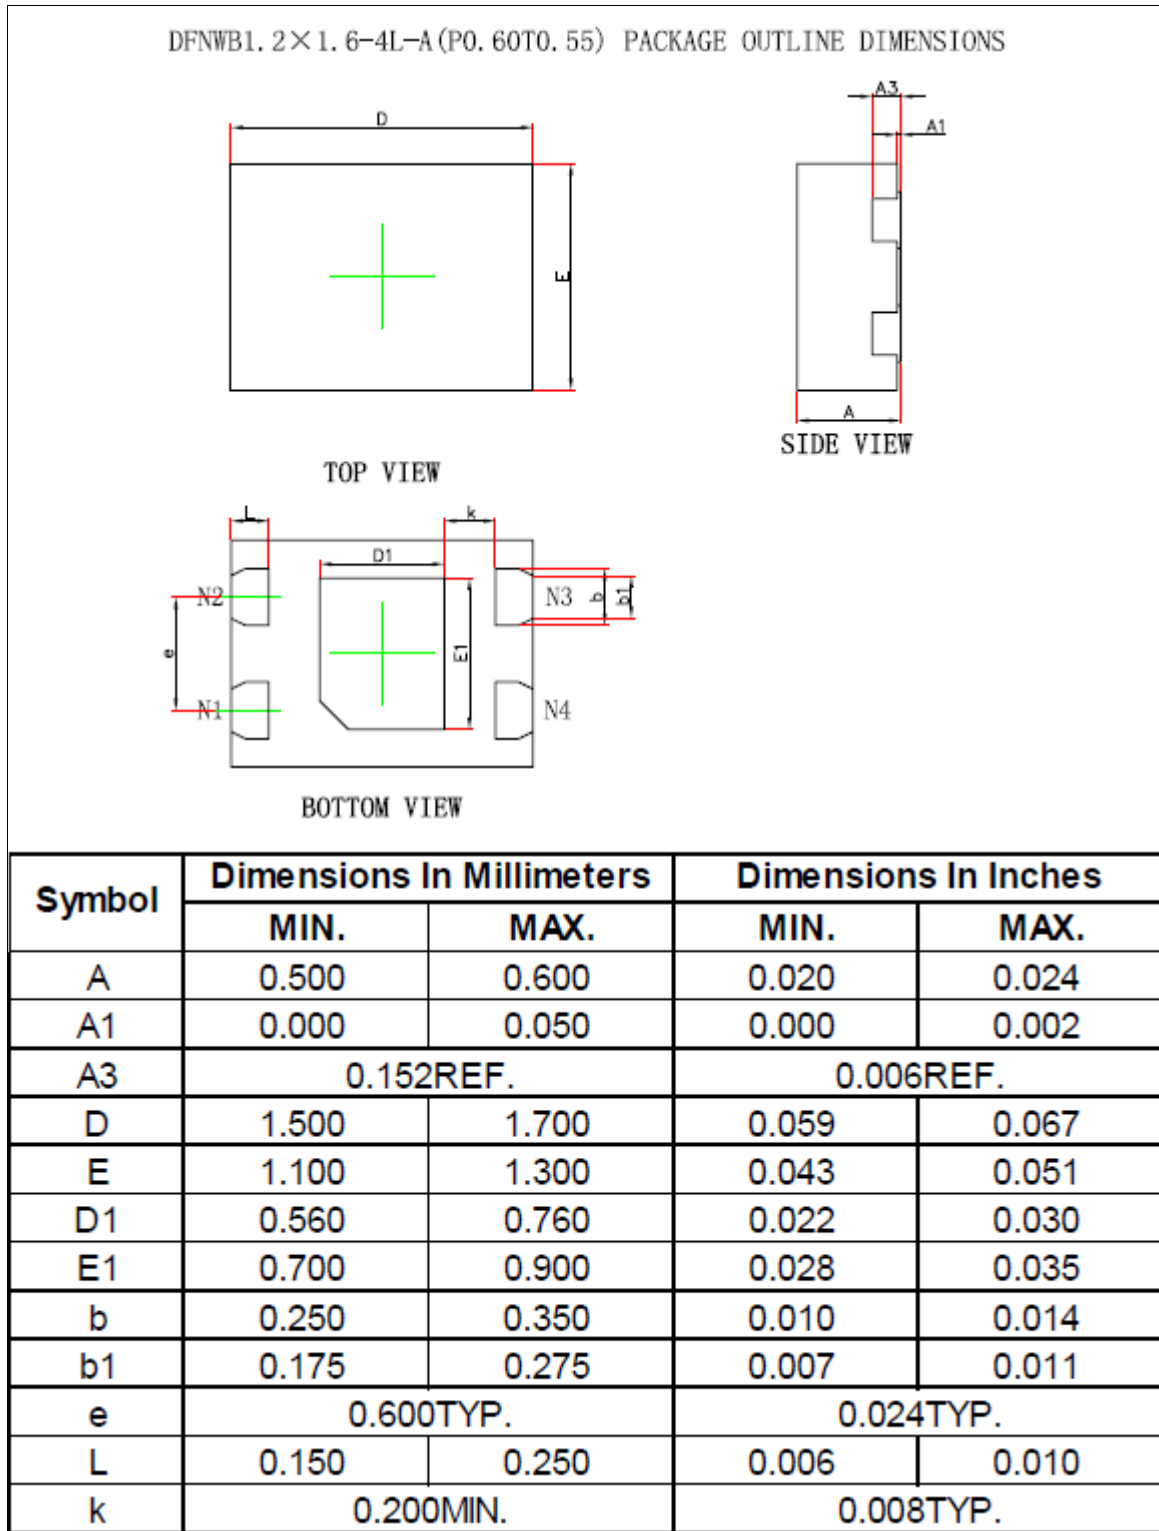


Figure 4-1 DFN4 package size



5 Ordering information

Type Number	Wafer Type	Description
FM11NT041-DNB-T-G	DFN4	Reel package
FM11NT041-WIB2	Bump Sawn Wafer	8 inch bump wafer (120um thickness, without UV exposure, on film frame carrier; electronic fail die marking according to SECSII format)

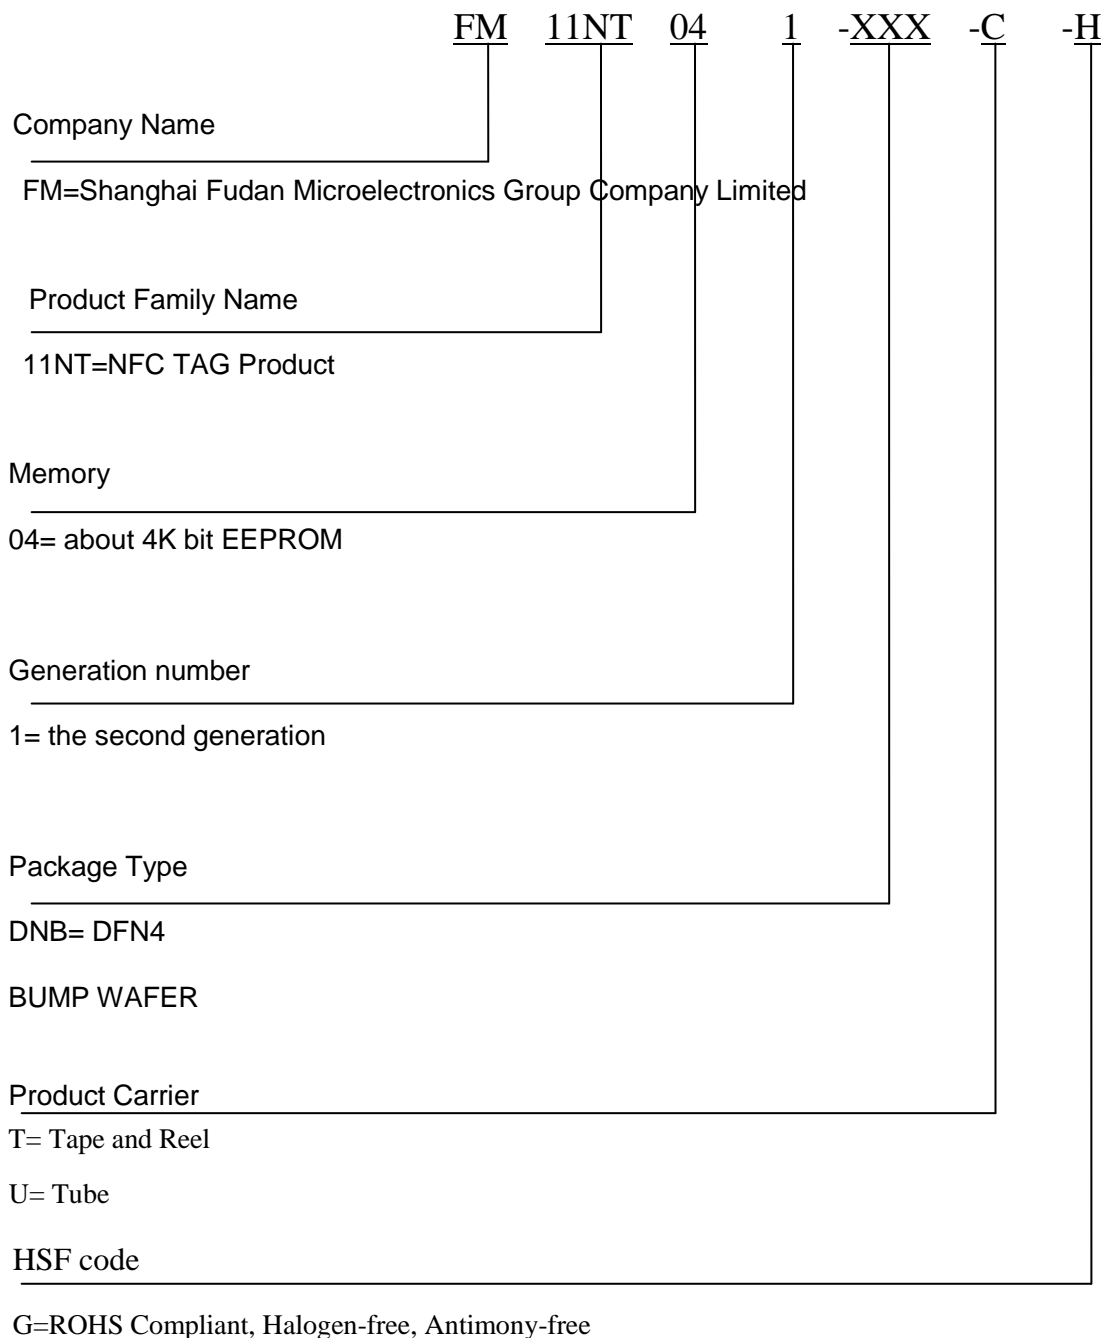



Revision history

Version	Publication date	Pages	Paragraph or Illustration	Revise Description
1.0	Sep. 2020	21		New datasheet for the new chip version



Sales and Service

Shanghai Fudan Microelectronics Group Co., Ltd.
Address: Bldg No. 4, 127 Guotai Rd, Shanghai City China.
Postcode: 200433
Tel: (86-021) 6565 5050 Fax: (86-021) 6565 9115

Shanghai Fudan Microelectronics (HK) Co., Ltd.
Address: Unit 506, 5/F., East Ocean Centre, 98 Granville Road, Tsimshatsui East, Kowloon, Hong Kong
Tel: (852) 2116 3288 2116 3338
Fax: (852) 2116 0882

Beijing Office
Address: Room 423, Bldg B, Gehua Building, 1 QingLong Hutong, Dongzhimen Alley north Street, Dongcheng District, Beijing City, China.
Postcode: 100007
Tel: (86-010) 8418 6608
Fax: (86-010) 8418 6211

Shenzhen Office
Address: Room.2306-2308, Building A7, Chuangzhi Cloud City, Liuxian Avenue, Xili Street, Nanshan District, Shenzhen, China.
Postcode: 518000
Tel: (86-0755) 8335 0911 8335 1011 8335 2011 8335 0611
Fax: (86-0755) 8335 9011

Shanghai Fudan Microelectronics (HK) Ltd Taiwan Representative Office
Address: Unit 1225, 12F., No 252, Sec.1 Neihu Rd., Neihu Dist., Taipei City 114, Taiwan
Tel : (886-2) 7721 1889
Fax: (886-2) 7722 3888

Shanghai Fudan Microelectronics (HK) Ltd Singapore Representative Office
Address : 47 Kallang Pudding Road, #08-06,The Crescent @ Kallang ,Singapore 349318
Tel : (65) 6443 0860
Fax: (65) 6443 1215

Fudan Microelectronics (USA) Inc.
Address : 97 E Brokaw Road, Suite 320, San Jose, CA 95112
Tel : (+1)408-335-6936

Web Site: <http://www.fmsh.com/>