



A Type Chains

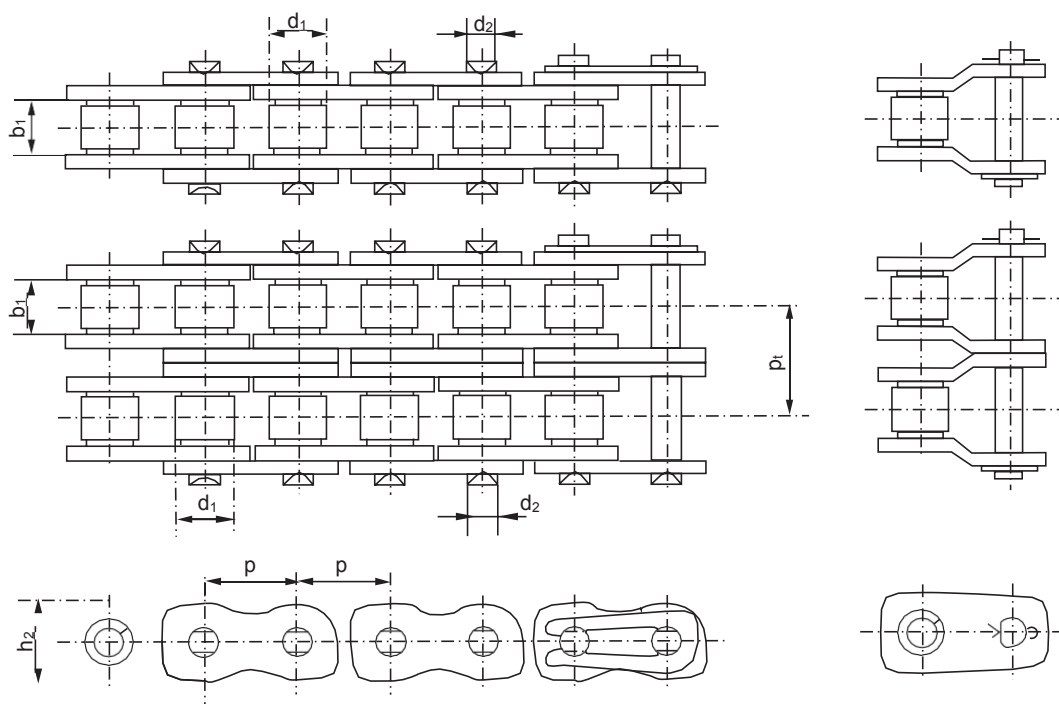


链号 Chain No.		节距 Pitch	内节内宽 Width between inner plates	滚子直径 Roller diameter	销轴直径 Pin diameter	内链板高度 Plaes depth	排 距 Rowdittance	抗拉强度 Tensile strength			重量 Weight
GB	ANSI	P (mm)	b1 (mm)	d1(max) (mm)	d2 (mm)	h2 (mm)	Pt (mm)	单排 (KN)	双排 (KN)	三排 (KN)	单排 (kg/m)
08A	40	12.70	7.85	7.92	3.96	12	14.38	12.8	27.6	41.4	0.65
10A	50	15.88	9.40	10.16	5.08	15	18.11	21.8	43.6	65.4	1.05
12A	60	19.05	12.57	11.91	5.94	18	22.78	31.1	62.3	93.4	1.56
16A	80	25.40	15.75	15.88	7.92	24	29.29	55.6	111.2	166.8	2.63
20A	100	31.75	18.90	19.05	9.52	30	35.76	86.7	173.5	260.2	4.03
24A	120	38.10	25.22	22.23	11.10	35.8	45.44	125	249.1	373.7	5.94
28A	140	44.45	25.22	25.4	12.70	42	48.87	169	338	507.1	7.5
32A	160	50.80	31.55	28.58	14.27	48.2	58.55	222	444.8	667.2	10.2
36A	180	57.15	35.48	35.71	17.26	54	65.84	286	566.1	840.6	14.08
40A	200	63.50	37.85	39.68	19.84	60	71.55	347	693.9	1040.9	16.86
48A	240	76.20	47.35	47.63	23.81	72.1	87.83	501	1000	1501.3	23.9

B Type Chains

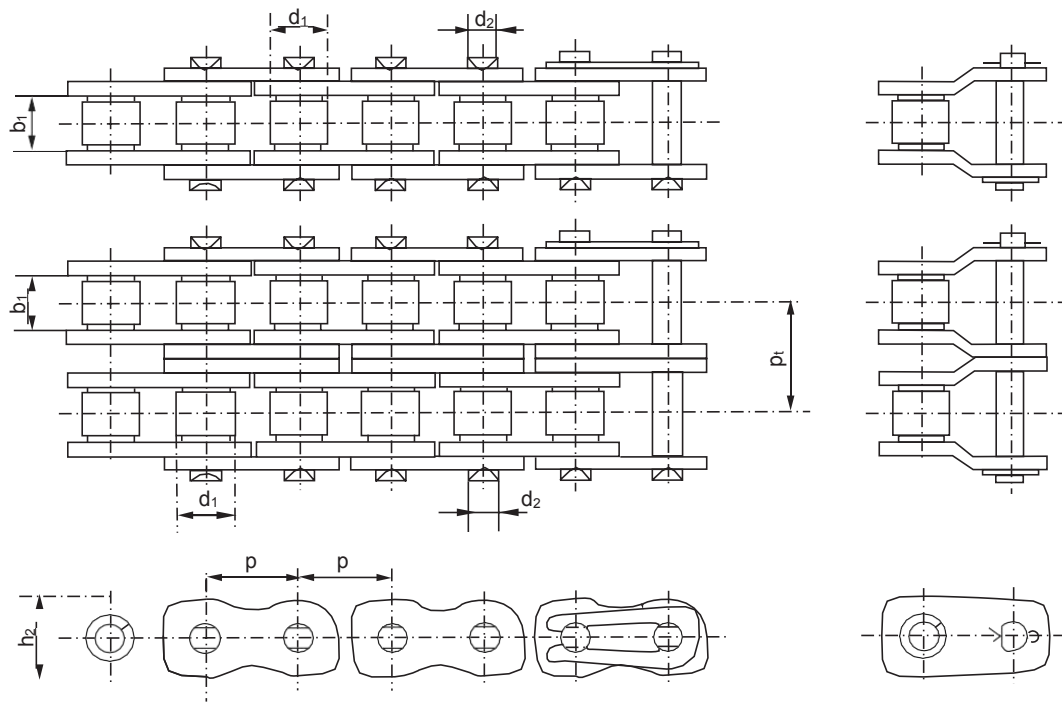


链号 Chain No.	节距 Pitch	内节内宽 Width between inner plates	滚子直径 Roller diameter	销轴直径 Pin diameter	内链板高度 Plaes depth	排 距 Row ditance	抗拉强度 Tensile strength			重量 Weight
GB	P (mm)	b1 (mm)	d1 (max) (mm)	d2 (mm)	h2 (mm)	Pt (mm)	单排 (KN)	双排 (KN)	三排 (KN)	单排 (kg/m)
08B	12.70	7.75	8.51	4.45	11.80	13.92	17.8	31.1	46.65	0.72
10B	15.875	9.65	10.16	5.08	14.60	16.59	22.2	44.5	66.7	0.95
12B	19.05	11.68	12.07	5.72	16.00	19.46	28.9	57.8	86.7	1.23
16B	25.40	17.02	15.88	8.28	20.90	31.88	60	106	160	2.8
20B	31.75	19.56	19.05	10.19	26.00	36.45	95	170	250	3.9
24B	38.10	25.40	25.04	14.63	33.00	48.36	160	280	425	7.14
28B	44.45	30.99	27.94	15.90	36.70	59.56	200	360	530	9.37
32B	50.80	30.99	29.21	17.81	41.90	58.55	250	450	670	9.94
40B	63.50	38.10	39.37	22.89	52.50	72.29	355	630	950	16.4
48B	76.20	45.72	48.26	29.24	63.88	91.21	560	1000	1501.3	23.1
56B	88.90	53.34	53.98	34.32	77.85	106.60	850	1600	2240	31.2

C Type Chains

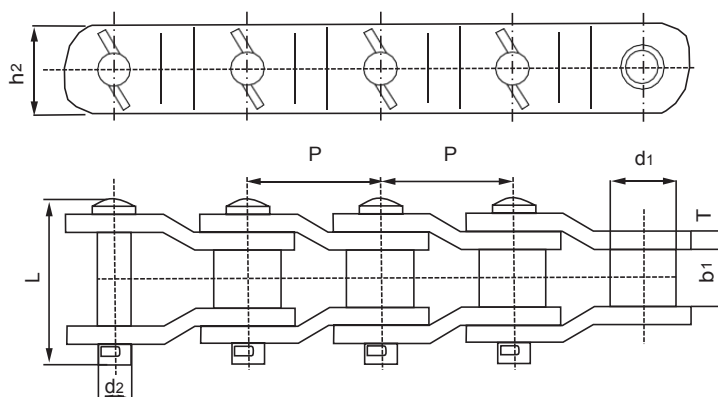

链号 Chain No.	节距 Pitch	内节内宽 Inner width of inner link	滚子直径 Diameter of roller	链板高度 Height of sidebar	链板厚度 Thickness of sidebar	销轴长度 Length of pin	销轴直径 Diameter of pin	抗拉强度 Tensile strength	每米净重 Weight per meter
	P (mm)	b1(max) (mm)	d1(max) (mm)	h2(max) (mm)	T (mm)	L(max) (mm)	d2(max) (mm)	Q(min) (KN)	q (kg)
2010	63.50	38.10	31.75	47.80	7.90	90.70	15.90	262.00	14.0
2510	78.1	31.75	36.9	40	8.0	94.8	16.00	271.00	10.7
2512	77.90	39.60	41.28	57.00	9.70	103.40	19.08	378.00	18.0
2814	88.90	38.10	44.40	60.50	12.70	117.60	22.25	516.00	25.0
3315	103.45	49.30	45.24	63.50	14.20	134.60	23.85	596.00	27.0
3618	114.30	52.30	57.15	79.20	14.20	141.20	27.97	814.00	38.0
4020	127.00	69.90	63.50	91.90	15.70	168.10	31.78	1054.00	52.0
4824	152.40	76.20	76.20	104.6	19.00	187.50	38.13	1521.00	68.0
WG / WB系列参数 WG / WB Series Data									
WG781	78.18	38.1	33.0	45.0	10.0	97.0	17.00	313.60	16.0
WG103	103.20	49.2	46.0	60.0	13.0	125.5	23.00	539.00	26.0
WG103H	103.20	49.2	46.0	60.0	16.0	138	23.00	539.00	31.2
WG140	140.00	80.0	65.0	90.0	20.0	187.0	35.00	1176.00	59.2
WB9525	95.25	39.0	45.0	65.0	16.0	124.0	23.00	635.00	22.2
WB7900	79.00	39.0	31.5	54.0	9.5	93.5	18.50	381.00	12.8
WB7938	79.38	41.2	40.0	57.2	9.5	100.0	19.50	509.00	18.7
WB238	88.9	36.8	44.40	57.2	12.7	113.4	22.15	501.4	25.4
WB1207	127.0	68.3	63.50	88.9	15.7	158.3	31.75	1044.0	53.1

M Type Chains

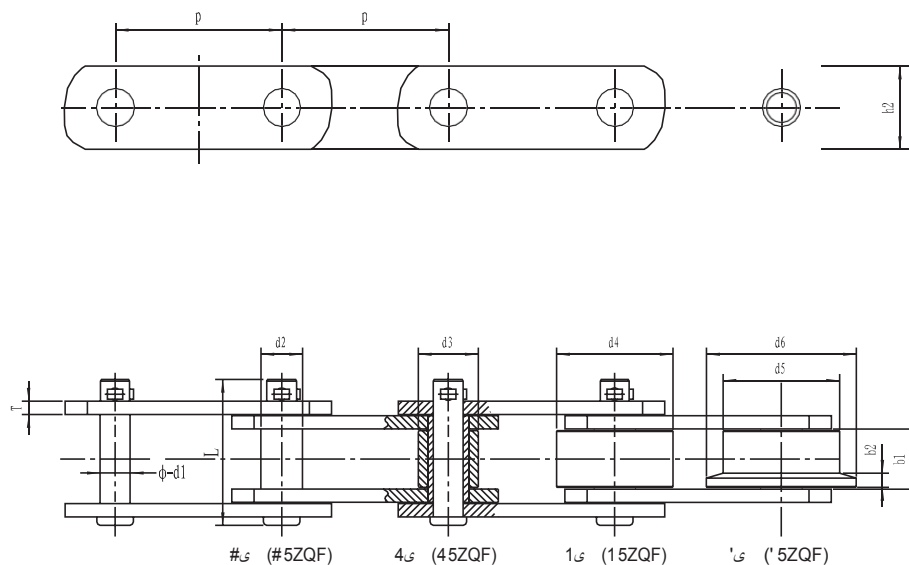


链号 Chain No.	节距 Pitch						内节内宽 Width between inner plates	销轴直径 Pin dia.	套筒直径	S型滚子外径 "S" type roller dia.
	P (mm)						b1 (min) (mm)	d1 (max) (mm)	d2 (max) (mm)	d3 (max) (mm)
M20	50	63	80	100	125	160	15	6	9	12.5
M28	63	80	100	125	160	200	17	7	10	15
M40	80	100	125	160	200	250	19	8.5	12.5	18
M56	80	100	125	160	200	250	23	10	15	21
M80	100	125	160	200	250	315	27	12	18	25
M112	125	160	200	250	315	400	31	15	21	30
M160	160	200	250	315	400	500	36	18	25	36
M224	200	250	315	400	500	630	42	21	30	42
M315	200	250	315	400	500	630	47	25	36	50
M450	250	315	400	500	630	800	55	30	42	60
M630	250	315	400	500	630	800	65	36	50	70
M900	315	400	500	630	800	1000	76	44	60	85


链号 Chain No.	P型滚子外径 "P" type roller dia.	F型滚子 "F" type roller		链板高度 Height of plate	链板厚度 Thickness of plate	销轴长度 Length of pin	抗拉荷载 Breaking load
		边缘直径 dia.	边缘宽度 Flange width				
	d4 (max) (mm)	d6 (max) (mm)	b2 (max) (mm)	h2 (max) (mm)	T (mm)	L (mm)	Q (KN)
M20	25	35	3.5	19	2.5	35	20
M28	30	40	4	21	3	40	28
M40	36	45	4.5	26	3.5	45	40
M56	42	55	5	31	4	52	56
M80	50	65	6	36	5	62	80
M112	60	75	7	41	6	73	112
M160	70	90	8.5	51	7	85	160
M224	85	105	10	62	8	98	224
M315	100	125	12	72	10	112	315
M450	120	150	14	82	12	135	450

M630	140	175	16	105	14	154	630
M900	170	210	18	123	16	180	900


D Type Chains

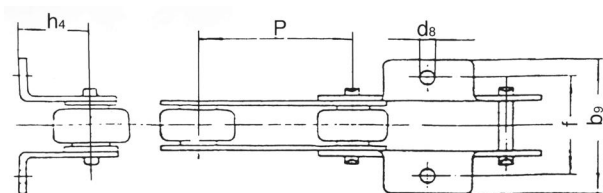


K1型-单孔弯附板
K1 Type

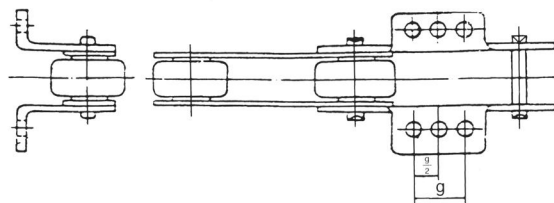

K3型-三孔弯附板
K3 Type

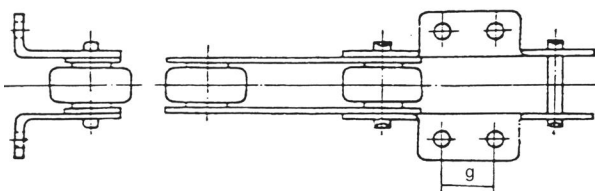


K2型-双孔弯附板
K2 Type



H型-加高附板
H Type

链号 Chain No.	K型 "K" type										H型 Deep link
	d8 (mm)	h4 (mm)	f (mm)	b9 (mm)	孔距 Distance of holes		孔距 Distance of holes		孔距 Distance of holes		H6 (mm)
					p (mm)	g (mm)	p (mm)	g (mm)	p (mm)	g (mm)	
M20	6.6	16	54	84	63	20	80	35	100	50	16
M28	9.0	20	64	100	80	25	100	40	125	65	20
M40	9.0	25	70	112	80	20	100	40	125	65	22.5
M56	11.0	30	88	140	100	25	125	50	160	85	30
M80	11.0	35	96	160	125	50	160	85	200	125	32.5
M112	14.0	40	110	184	125	35	160	65	200	100	40
M160	14.0	45	124	200	160	50	200	85	250	145	45
M224	18.0	55	140	228	200	65	250	125	315	190	60
M315	18.0	65	160	250	200	50	250	100	315	155	65
M450	18.0	75	180	280	225	85	315	155	400	240	80
M630	24.0	90	230	380	315	100	400	190	500	300	90
M900	30.0	110	280	480	315	65	400	155	500	240	120


FV Type Chains

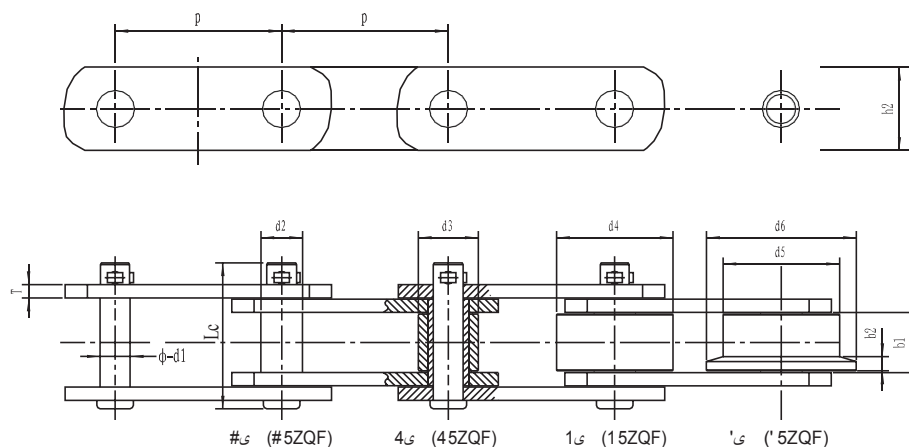

链号 Chain No.	节距 Pitch	尺寸参数 Dimension chart						
	P (mm)	b1(min) (mm)	d1(max) (mm)	d2(max) (mm)	d3(max) (mm)	d4(max) (mm)	d5(max) (mm)	d6(max) (mm)
FV40	40, 63, 100	18	10	15	20	32	40	48
FV63	63, 100, 125, 160	22	12	18	26	40	50	60
FV90	63, 100, 125, 160, 200, 250	25	14	20	30	48	63	73
FV112	100, 125, 160, 200, 250	30	16	22	32	55	72	87
FV140	100, 125, 160, 200, 250, 315	35	18	26	36	60	80	95
FV180	125, 160, 200, 250, 315, 400	45	20	30	42	70	100	120
FV250	125, 160, 200, 250, 315, 400	55	26	36	50	80	125	145
FV315	160, 200, 250, 315, 400	65	30	42	60	90	140	170
FV400	160, 200, 250, 315, 400	70	32	44	60	100	150	185
FV500	160, 200, 250, 315, 400, 500	80	36	50	70	110	160	195
FV630	200, 250, 315, 400, 500	90	42	56	80	120	170	210




链号 Chain No.	尺寸参数 Dimension chart					抗拉荷载 Breaking load
	F型链条轮缘宽度 b2(mm)	h2 (mm)	Lc(max) (mm)	L(max) (mm)	T (mm)	单排 Q(min) (KN)
FV40	4	26	44	37	3	40
FV63	5	30	55	46	4	63
FV90	6.5	35	62	53	5	90
FV112	7.5	40	72	63	6	112
FV140	9	45	80	68	6	140
FV180	13	50	100	86	8	180
FV250	15	60	114	98	8	250
FV315	18	70	133	117	10	315
FV400	20	70	151	131	12	400
FV500	21	80	161	141	12	500
FV630	22	100	173	153	12	630

RF Type Chains

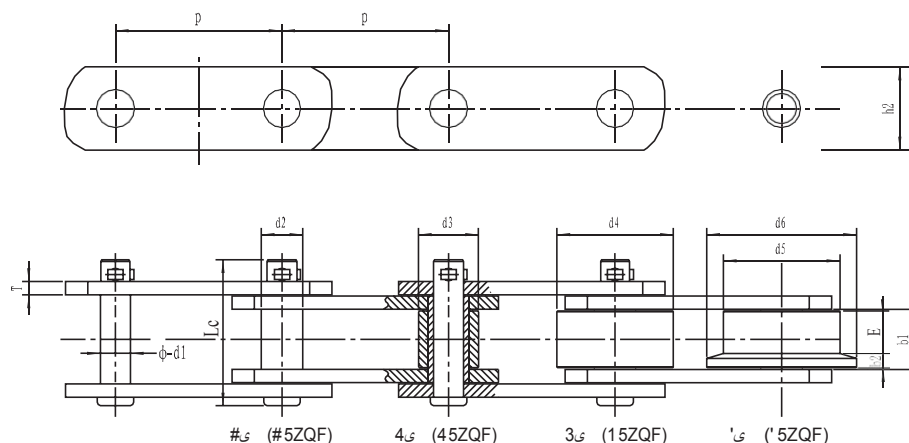


链号 Chain No.	节距 Pitch	滚子 Roller				链板 Plate		销 Pin	内节内宽 Width between link plates	平均抗拉强度 Average tensile strength
		R型R type	F 型 F type		S 型 S type					
		d4 (mm)	d5 (mm)	E (mm)	d3 (mm)	h2 (mm)	T (mm)	d1 (mm)	b1 (mm)	KN (kgf)
RF03075 RF03100	75 100	31.8	31.8	12	15.9	22	3.2	8.0	16.1	29 (3000)
RF430	101.6	38.1	—	—	20.1	25.4	4.8 (5.0)	9.7	22.6	54 (5500)
RF05075 RF05100 RF05150	75 100 150	40	40	14	22.2	32	4.5	11.3	22	69 (7000)
RF204	66.27	—	—	—	22.2	28.6	6.3 (6.0)	11.3	27	78 (8000)
RF450	101.6	44.5	44.5	18	22.2	28.6	6.3 (6.0)	11.3	27	78 (8000)
RF08150	150	44.5	44.5	18	22.2	28.6	6.3 (6.0)	11.3	27	78 (8000)
RF650	152.4	50.8	50.8	20	25.8	38.1	6.3 (6.0)	11.3	30.2	78 (8000)
RF10100 RF10150	100 150	50.8	50.8	— 20	29	38.1	6.3 (6.0)	14.5	30	113 (11500)
RF214	101.6	44.5	—	—	31.8	38.1	7.9	15.9	31.6	127 (13000)
RF205	78.11	—	—	—	31.8	38.1	7.9	15.9	37.1	127 (13000)
RF6205	152.4	57.2	57.2	25	34.9	44.5	7.9	15.9	37.1	186 (19000)
RF12200 RF12250	200 250	65	65	24	34.9	44.5	7.9	15.9	37.1	186 (19000)
RF212	152.4	69.9	—	—	40.1	50.8	9.5 (10)	19.1	37.1	245 (25000)
RF17200 RF17250 RF17300	200 250 300	80	80	34	40.1	50.8	9.5 (10)	19.1	51.4	245 (25000)
RF26200 RF26250 RF26300 RF26450	200 250 300 450	— 100	— 100	— 38	44.5	63.5	9.5 (10)	22.2	57.2	314 (32000)
RF36250 RF36300 RF36450 RF36600	250 300 450 600	— 125	— 125	— 42	50.8	76.2	12.7	25.4	66.7	475 (48500)
RF52300 RF52450 RF52600	300 450 600	140	140	49	57.2	76.2	16	31.8	77	500 (51000)
RF60300 RF60350 RF60400	300 350 400	140	140	49	—	90	12.7	35.0	77	500 (51000)

F Type Chains

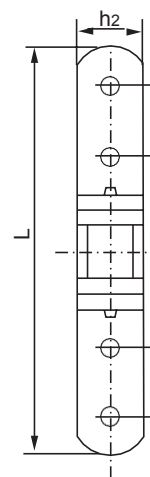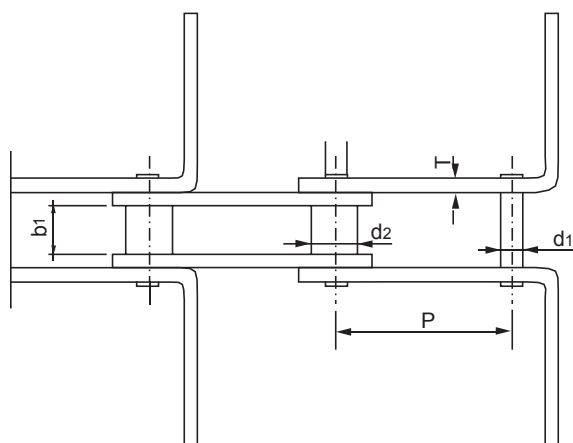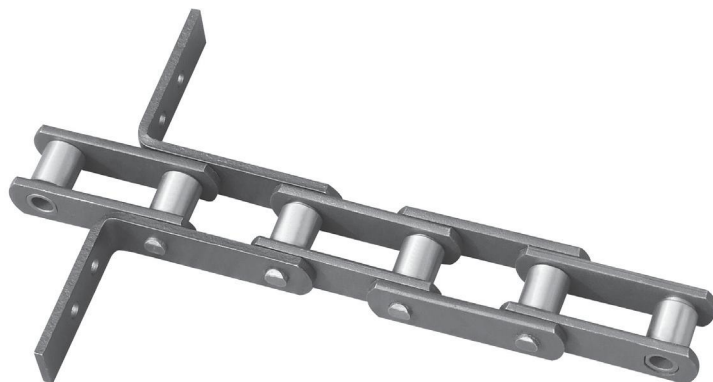


链号 Chain No.	节距 Pitch	内节内宽 Inner width of inner link	销轴直径 Diameter of pin	套筒直径	滚子直径 Diameter of roller	链板高度 Height of sidebar	链板厚度 Thickness of sidebar	刮板宽度 Width of scraper	刮板高度 Height of scraper	抗拉强度 Tensile strength	重量 Weighth
	P (mm)	b1(min) (mm)	d1 (mm)	d2 (mm)	d3(max) (mm)	h2 (mm)	T (mm)	L (mm)	h2 (mm)	Q(min) (KN)	kg/m
LTF665	66.5	26.5	12		22	30	6	164	30	80	6.1
GLR66.5(6)	66.5	26.5	12	16.23	22.23	30	6	130	60	80	5.9
GLF66.5(6)×230	66.5	26.5	12	—	22.23	30	6	230	30	80	6.5
GLF66.5(6)×270	66.5	26.5	12	—	22.23	30	6	270	30	80	6.9
GLF100(6) D×225	100	38	16	21.6	36	40	6	225	40	112	
GLF100(6) D×294	100	38	16	21.6	36	40	6	294	40	112	
GLF125(6)×235	125	32.5	14.27	20	28.58	40	6	235	40	100	
GL125(8) D×295	125	40	20	30	40	60	8	295	60	220	
GL125(8) D×370	125	40	20	30	40	60	8	370	60	220	
GLF160(8) D×385	160	36	17.81	24.5	36	50	8	385	50	160	
GLF200(8) D×467	200	42	20	30	40	60	8	467	60	220	
TGSS20	100	28	16	22	—	36	6	170	36	115	7
TGSS25	100	28	16	22	—	35	6	230	36	115	7.5
TGSS32	125	36	18	25	—	51	8	300	51	220	12
TGSS40	200	42	21	30	42	62	8	370	62	250	17
TGSS50	200	48	25	36	50	72	10	480	72	4400	25.4
TGSS63	200	48	25	36	50	72	10	600	72	400	27.6
GSSMS32	66.27	27	15.88	11.1	23	28.6	4	270	28.6	106.7	5.3
GSSMS40	66.27	27	15.88	11.1	23	31.5	7.6	359	31.5	124.6	8.7

G Type Chains

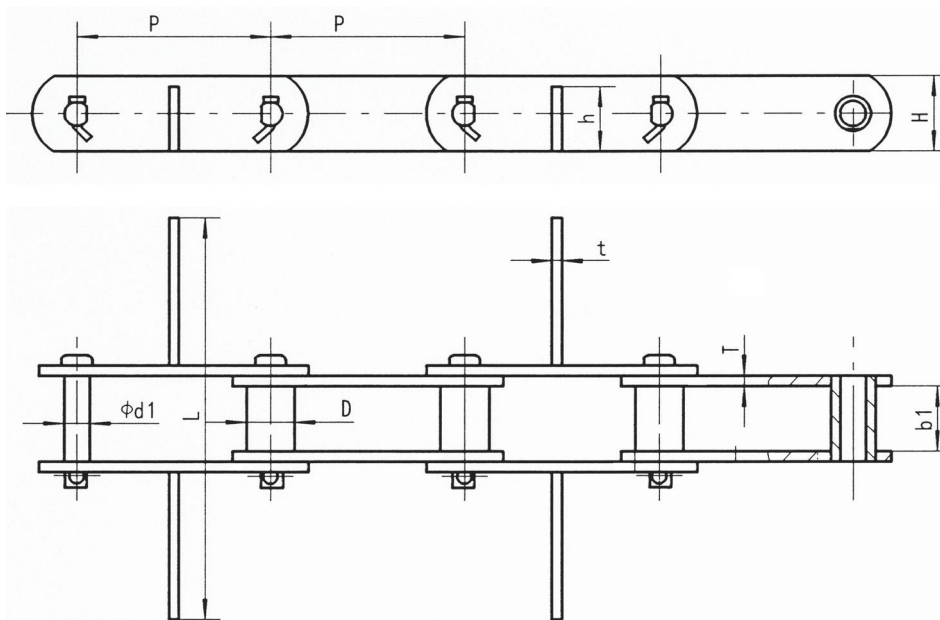


链号 Chain No.	节距 Pitch	滚子直径 Diameter of roller	内节内宽 Inner width of inner link	销轴直径 Diameter of pin	链板高度 Height of sidebar	链板厚度 Thickness of sidebar	刮板高度 Height of scraper	刮板厚度 Thickness of scraper	横向距离	重量 Weigth
	P (mm)	D (mm)	b (mm)	d (mm)	H (mm)	T (mm)	h (mm)	t (mm)	L (mm)	kg/m
MS16	100	28	24	17	35	6	30	6	140	8.1
ZYC18	101.6	26.5	27	11.5	35	6	35	6	75.5	5.9
MC16	100	28	24	17	35	6	110	Ø16	145	11.6
LZJ1	101.6	26.5	27	11.5	35	6	35	6	151	6.1
MS20	125	32	28	20	42	7	36	8	180	10.5
MSH20	101.6	26.5	27	11.5	35	6	35	6	180	6.9
MC20	125	32	28	20	42	7	120	Ø18	185	14.7
BMMC20	101.6	26.5	27	11.5	35	6	35	6	180	6.8
MS25	160	40	35	24	50	8	45	10	220	14.7
MC25	160	40	35	24	50	8	145	Ø20	230	18.6
BMMC25	101.6	26.5	27	11.5	35	6	145/35	20/6	230/220	6.3
MS32	200	48	45	20	55	8	45	8	290	18

H Type Chains

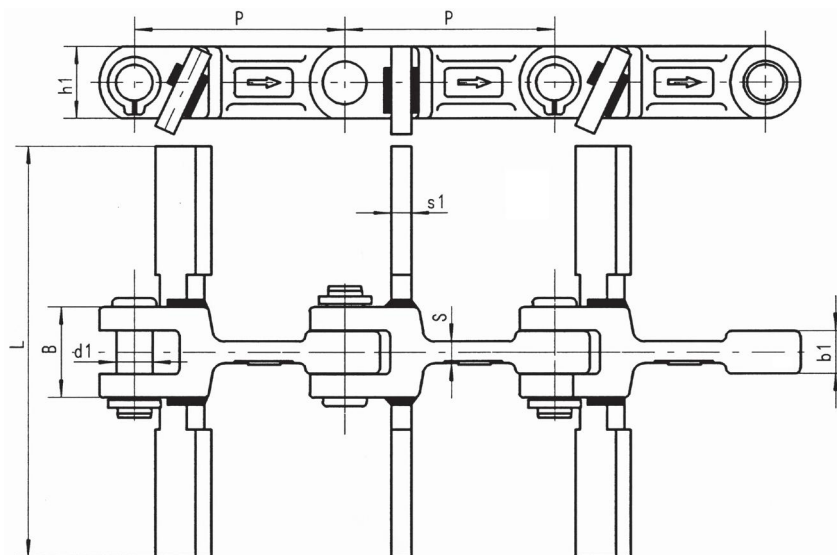


链号 Chain No.	节距 Pitch	大头厚	小头厚	杆宽	杆厚	销轴直径 Diameter of pin	刮板高度 Height of scraper	刮板厚度 Thickness of scraper	通道宽度
	P (mm)	B (mm)	b1 (mm)	H (mm)	s (mm)	d1 (mm)	h1 (mm)	s1 (mm)	L (mm)
MS16	100	30	15	27	27	14	27	8	140
MZ16	100	40	18	35	12	17	110	12	145
MS20	125	34	17	35	8	17	28/35	8	180
YD250	125	38	18	38	10	18	38	10	215
MZ20	125	50	24	46	15	20	120	12	180
MZ20D	125	52	24	60	16	26	60	14	185
MS30	142	46	22	49	14	25	45/49	12	270
MZ30	142	64	28.5	50	18	25	150	14	270
P142N	142	43	19	50	12.5	25	50	12	180
P150	150	38	18	40	10	18	40	10	215
P150D	150	60	28	70	18	30	70	14	270
MS25	160	48	23	39	13	20	36/39	12	220
MZ25	160	58	28	55	18	25	145	12	230
MZ25D	160	66	29	64	22	28	64	12	270
3006	200	65	30	70	24	32	70	16	400
MS55D	200	87	38	85	30	36	85	16	500
MS55	200	80	35	70	25	28	70	16	460
ML40	200	48	23	58	18	25	58	14	350
ML40A	200	48	24	58.2	18	25	58	14	350
ML40B	200	56	26	58.2	16	25	58	14	350
MS32	200	42	20	50	12	25	50	12	270
MS32C	200	42	20	50	12	20	50	12	270
MG20	200	70	27	70	17	35	70	12	460
YD310	200	41	20	46	12	20	46	8	275

I Type Chains

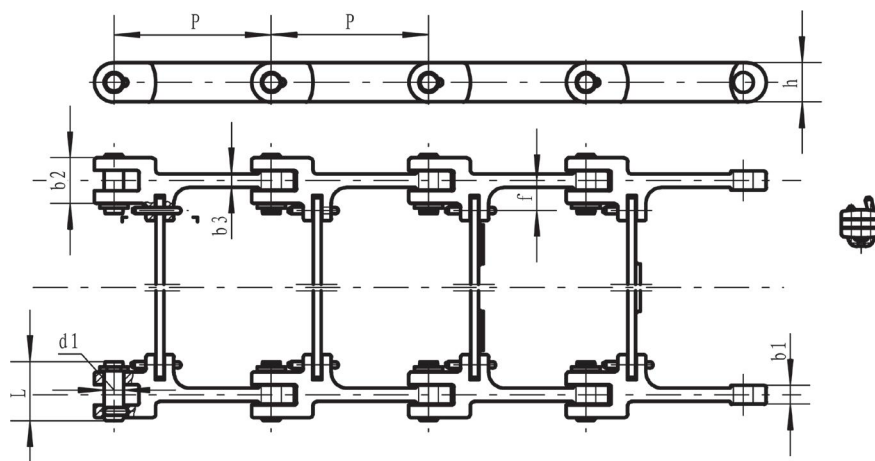


P	d1 (mm)	h (mm)	b1 (mm)	b2 (mm)	b3 (mm)	f (mm)	L (mm)
200	25	50	24	58	17	38	75

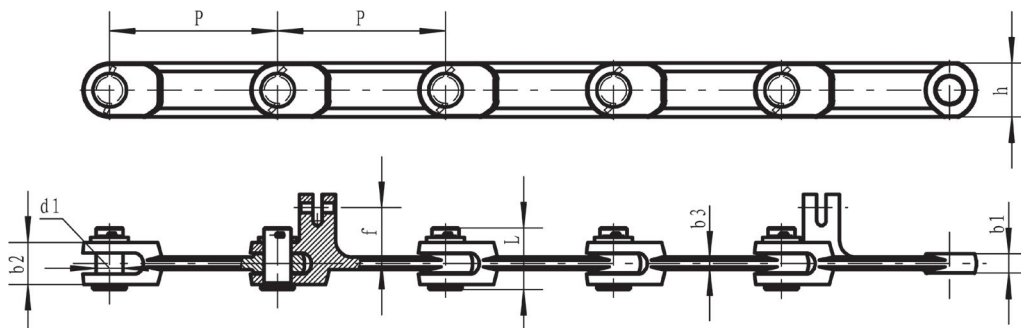




P	d1 (mm)	h (mm)	b1 (mm)	b2 (mm)	b3 (mm)	f (mm)	L (mm)
200	32	64	23	50	15	66	75

J Type Chains

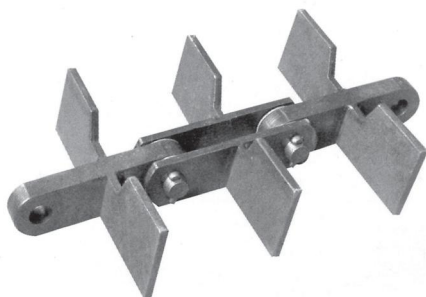


埋刮板链适用于粉末状、颗粒状及小块状的水泥、粉尘、谷物、砂石和煤炭等散状物料的运输设备。

The Buried Scraper Chain is suitable for conveyor device used in bulk materials such as cement, powder, grain powder, sand and coal in powder, pellet or small lump styles.

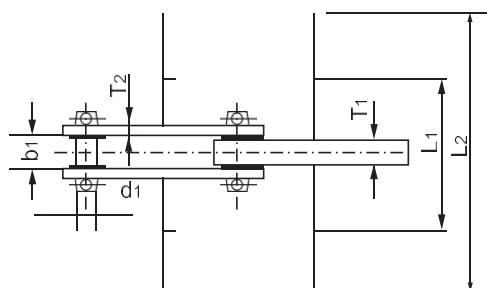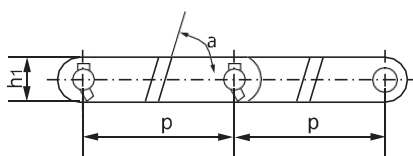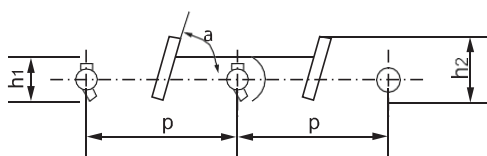


链号 Chain No.	节距 Pitch P (mm)	外节内宽 Inner width of outer link b1(min) (mm)	销轴直径 Diameter of pin d2 (mm)	链板高度 Height of sidebar h1 (mm)	链板厚度 Thickness of sidebar		刮板尺寸 Dimensions of scraper				抗拉强度 Tensile strength Q(min) (KN)
					内链板 Inner sidebar T1 (mm)	外链板 Outersidebar T2 (mm)	L1 (mm)	L2 (mm)	h2 (mm)	α (°)	
GS31F	152.4	32.5	22	45	25.4	10	106	280	65.5	75	224.0
GS43F	152.4	34.0	22	45	28.0	12	115	400	80.5	90	224.0
DC200	152.4	32.5	22	45	25.4	10	—	160	—	75	224.0
DC250	152.4	32.5	22	45	25.4	10	106	210	65.5	75	224.0
DC310	152.4	32.5	22	45	25.4	10	106	270	65.5	75	224.0
DC450	200.0	41.0	22	80	35.0	14	150	400	121.3	75	600.0
DC250A	152.4	32.5	22	45	25.4	10	—	210	—	75	224.0
DC310A	152.4	32.5	22	45	25.4	10	—	270	—	75	224.0

K Type Chains


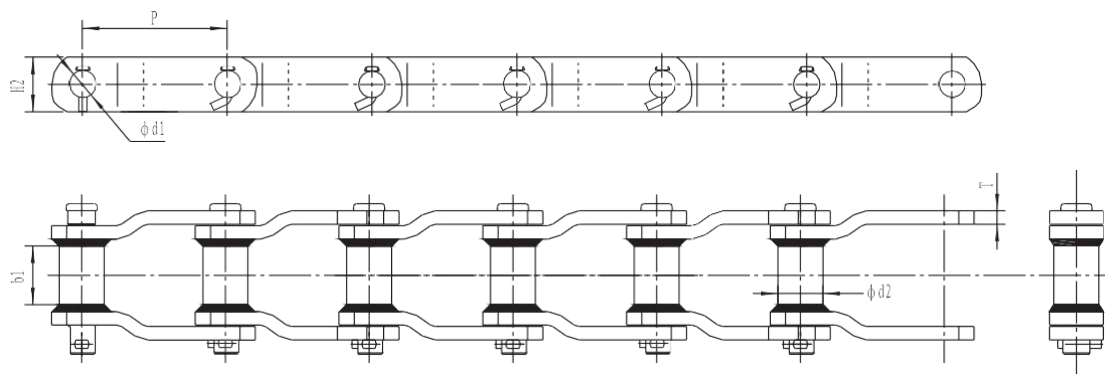


链号 Chain No.	节距 Pitch	销轴直径 Diameter of pin	套筒外径	链板高度	小端内宽	链板厚度	抗拉强度	重量
	P (mm)	d1 (mm)	d2 (mm)	h2 (mm)	b1 (mm)	T (mm)	(KN)	(kg/m)
WH78C	66.27	12.7	22.23	28.4	28.4	6.4	150	5.9
WH82C	78.1	14.29	27/25.4	32	31.8	6.4	160	8.3/8
WH124	101.6	19.05	36.5	38.1	41.3	9.5	300	12.2
WH132	153.67	25.25	44.45	50.8	76.2	12.7	378	20.5
WH150	153.67	25.25	44.45	63.5	77.1	12.7	398	24.5
WH155	153.67	28.42	44.45	63.5	73.6	14.27	411	27.7
WH157	153.67	28.52	44.45	63.5	76.4	15.88	552	29.1

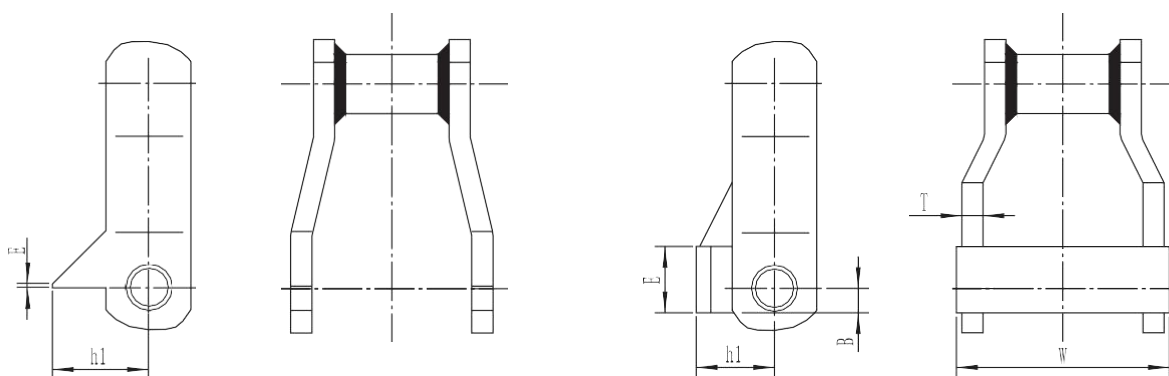



链号 Chain No.	节距 Pitch	销轴直径 Diameter of pin	套筒外径	链板高度	小端内宽	链板厚度	附件高度	附件宽度	附件位置	附件厚度
	P (mm)	d1 (mm)	d2 (mm)	H (mm)	b1 (mm)	T (mm)	h1 (mm)	E (mm)	B (mm)	T (mm)
ADWH155Z	153.67	28.37	44.45	63.5	69.9	14.2	71.75	5	0	14.2
ADWH155D	153.67	28.37	44.45	63.5	69.9	14.2	58.75	50	18.3	12

L Type Chains

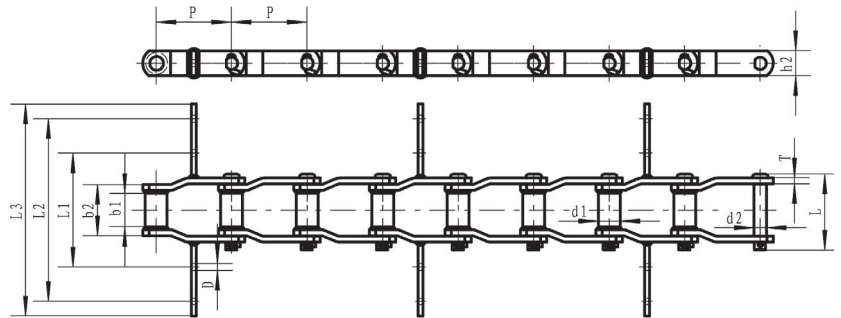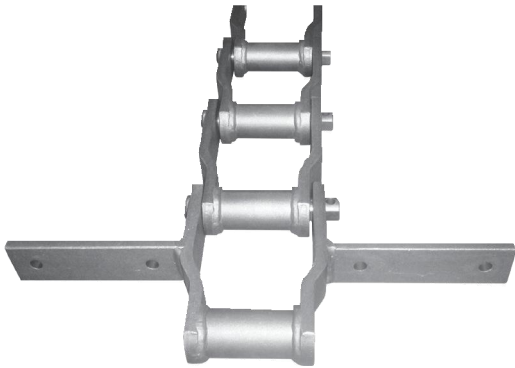


链号 Chain No.	节距 Pitch P (mm)	套筒外径 Outer diameter of bushing d2 (mm)	销轴直径 Diameter of pin d1 (max) (mm)	链板高度 Height of sidebar h2 (max) (mm)	小端内宽 Inner width of small end b1 (mm)	链板厚度 Thickness of sidebar T (mm)	通道宽度 F (mm)	刮板厚度 T1 (mm)	刮板孔径 D (mm)	抗拉强度 Tensile strength (KN)
MSW200	78.1	25.4	14.29	32	31.8	6.4	160	8	14	100.1
MCW250	78.1	25.4	14.29	32	31.8	6.4	175	10	14	100.1
MSW315	78.1	25.4	14.29	32	31.8	6.4	265	10	14	100.1
MSW400	78.1	25.4	14.29	32	31.8	6.4	350	10	14	100.1
GSMS200	78.1	27	14.29	32	31.8	6.4	170	3	9	132
GSMS250	78.1	27	14.29	32	31.8	6.4	220	3	9	132
GSMS320	78.1	27	14.29	32	31.8	6.4	270	3	9	132
GSMS400	78.1	27	14.29	32	31.8	6.4	350	3	9	132
JDMS200	78.1	27	14.29	31.8	38.1	6	170	8	10	132
JDMS250	78.1	27	14.29	31.8	38.1	6	220	10	10	132
JDMS400	78.1	27	14.29	31.8	31.8	6.4	350	9.5	14	100.1
DTMC250	101.6	31.75	19.05	38.1	41.28	9.5	210	9.5	12	300
MCW315	101.6	36.5	19.05	38.1	41.2	9.5	230	10	14	300
MSW400	101.6	36.5	19.05	38.1	41.2	9.5	350	10	14	300
MCW400	101.6	36.5	19.05	38.1	41.2	9.5	310	10	14	300
MSW500	101.6	31.75	19.05	38.1	41.2	9.5	450	10	14	300
GSMS320	101.6	31.75	19.05	38.1	41.2	9.5	270	5	11	280
GSMC320	101.6	31.75	19.05	38.1	41.2	9.5	250	5	12	280
GSMS400	101.6	31.75	19.05	38.1	41.2	9.5	330	5	11	280
GSMC400	101.6	31.75	19.05	38.1	41.2	9.5	334	10	12	280
GSMS500	101.6	31.75	19.05	38.1	41.2	9.5	430	5	11	280
GSMC500	101.6	31.75	19.05	38.1	41.2	9.5	430	10	12	280
JDMS400	101.6	31.75	19.05	38.1	41.28	9.5	330	9.5	12	300
MSW500	153.67	44.45	25.2	50.8	76.2	12.7	450	12	14	378.1
MCW500	153.67	44.45	25.2	50.8	76.2	12.7	400	12	14	378.1
MSW630	153.67	44.45	25.2	50.8	76.2	12.7	560	12	14	378.1
MCW630	153.67	44.45	25.2	50.8	76.2	12.7	540	12	14	378.1
MCW800	153.67	44.45	25.2	50.8	76.2	12.7	700	12	14	511
GSMS500	153.67	44.45	25.2	50.8	72.1	12.7	430	6	13	511
GSMC500	153.67	44.45	25.2	50.8	72.1	12.7	426	12	14	511
GSMS630	153.67	44.45	25.2	50.8	72.1	12.7	560	6	13	511
GSMC630	153.67	44.45	25.2	50.8	72.1	12.7	556	12	14	511
GSMS800	153.67	44.45	25.2	50.8	72.1	12.7	720	6	13	511
GSMC800	153.67	44.45	25.2	50.8	72.1	12.7	734	12	14	511
GSMS1000	153.67	44.45	25.2	50.8	72.1	12.7	920	6	13	511
JDMS500	153.67	44.45	25.2	50.8	59	10	430	10	14	356
JDMS630	153.67	44.45	25.2	50.8	66	10	560	10	14	356
JDMS800	153.67	44.45	25.2	50.8	68	12	730	12	14	511
JDMS1000	153.67	44.45	25.2	60	73	12	930	12	14	543
JDMS1200	153.67	44.45	25.2	60	66	12	526	12	14	511

M Type Chains

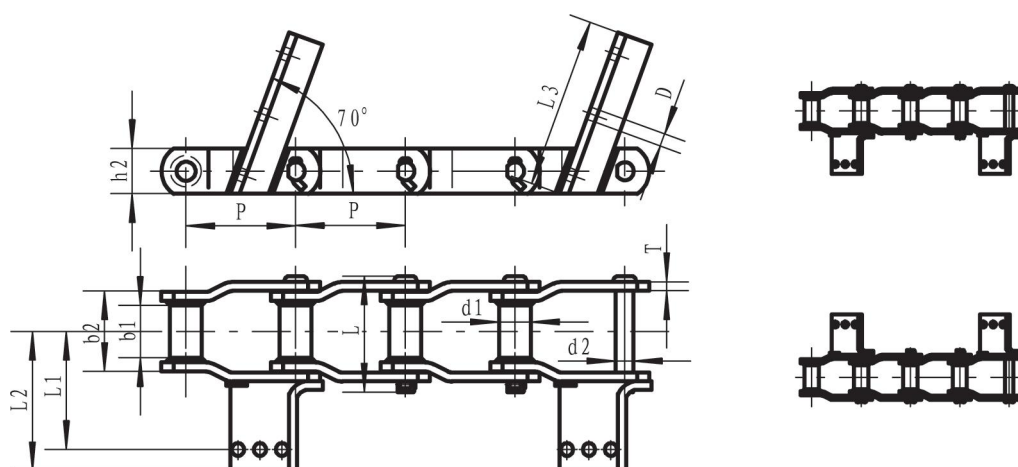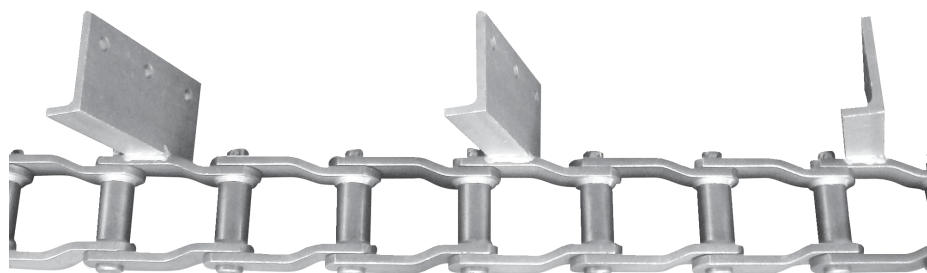


链号 Chain No.	节距 Pitch P (mm)	套筒外径 Outer diameter of bushing d1 (mm)	销轴直径 Diameter of pin d2 (max) (mm)	链板高度 Height of sidebar h2 (max) (mm)	小端内宽 Inner width of small end b1 (mm)	小端外宽 Outer width of small end b2 (mm)	链板厚度 Thickness of sidebar T (mm)	刮板尺寸 Dimensions of scraper				抗拉强度 Tensile strength Q (min) (KN)
								L1 (mm)	L2 (mm)	L3 (mm)	D (mm)	
WH150	153.67	44.45	28.57	63.5	73	111.76	12.7	163.4	193.4	240	18	542

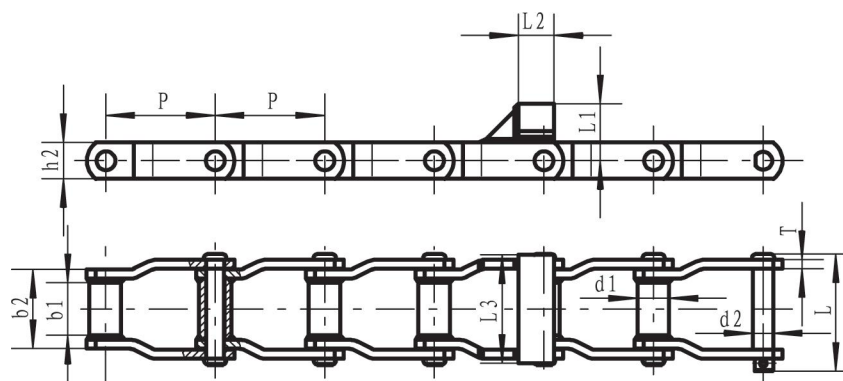

链号 Chain No.	节距 Pitch P (mm)	套筒外径 Outer diameter of bushing d1 (mm)	销轴直径 Diameter of pin d2 (max) (mm)	链板高度 Height of sidebar h2 (max) (mm)	小端内宽 Inner width of small end b1 (mm)	小端外宽 Outer width of small end b2 (mm)	链板厚度 Thickness of sidebar T (mm)	刮板尺寸 Dimensions of scraper			抗拉强度 Tensile strength Q (min) (KN)
								L1 (mm)	L2 (mm)	L3 (mm)	
WH132	153.67	44.5	25.4	63.5	73	109.7	12	85.75	50	152	356

N Type Chains

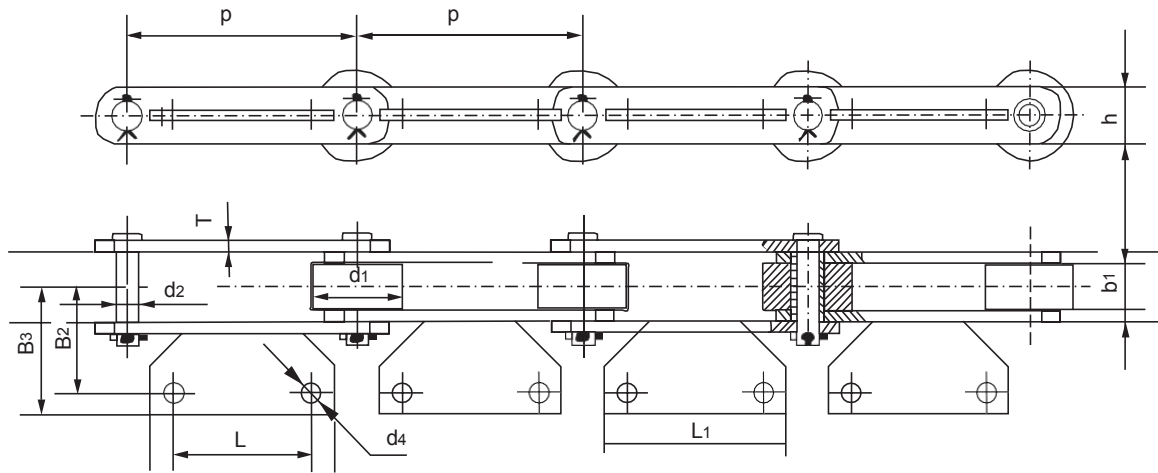


链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b1(min) (mm)	滚 子 直 径 Diameter of roller d1 (max) (mm)	销轴直径 Diameter of pin d2 (mm)	链板高度 Height of sidebar h (mm)	链板厚度 Thickness of sidebar T (mm)	刮板宽度 Width of scraper B (mm)	抗拉强度 Tensile strength Q(min) (KN)
M80-100	100	25	40	10	28	6	6	65
M80-125	125	27	50	12	32	6	6	80
M80-160	160	27	50	12	36	6	5	90
M80-160H	160	32	60	15	50	8	8	130
M90-200	200	40	80	18	50	10	10	210

附板尺寸 Dimensions of Attachment


链号 Chain No.	B2 (mm)	B3 (mm)	d4 (mm)	L (mm)	L1 (mm)
M80-100	50	60	9	60	80
M80-125	60	71	11	75	100
M80-160	60	71	11	80	110
M80-160H	65	78	13	80	120
M90-200	70	90	15	100	140

NE Type Chains

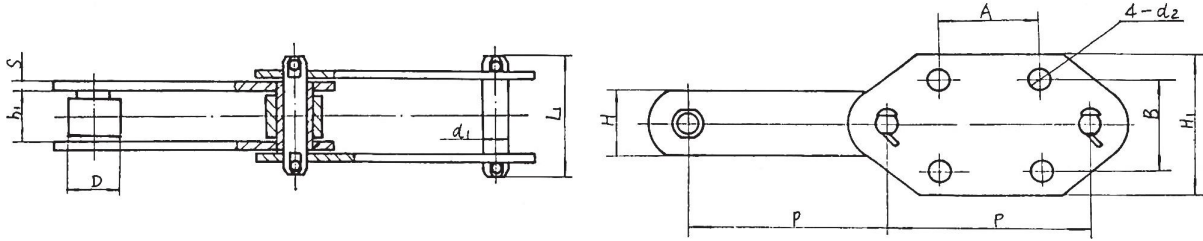


链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b1 (mm)	滚子直径 Diameter of roller D (mm)	销轴直径 Diameter of pin d1 (mm)	销轴长度 Length of pin L (mm)	链板宽度 Width of sidebar H (mm)	链板厚度 Thickness of sidebar S (mm)	宽链板 Width sidebar H1 (mm)	螺孔直径 Screw dia. d2 (mm)	链斗安装尺寸 A×B (mm)	重量 Weight Q (kg/m)
NE15	101.6	27	26.5	11.5	70	35	6	H=29 B=70	12	40×90	7.22
NE30	152.4	36.5	36	15.5	90	50	8	H=38 B=90	14	60×120	12.47
NE50	152.4	36.5	36	15.5	90	50	8	110	14	75×70	11.9
NE100	200	51.8	44.5	19.1	120	60	10	125	18	100×80	16.8
NE150	200	57.6	48.5	22.2	126	75	10	125	18	100×80	20.8
NE200	250	67.4	63.5	31.75	146	90	12	150	18	140×100	31
NE300	250	75	70	35	170	100	16	150	18	140×100	46.4
NE400	300	75	70	35	170	100	16	180	22	170×125	44.4
NE400A	300	55	60	30		82	16	170	17	160×120	35.73
TBS250	250	71.4	85	35	160	100	16	160	18	125×110	55.44
TBS200	200	58	70	28	136	85	14	140	16	100×100	34

SDB Type Chains

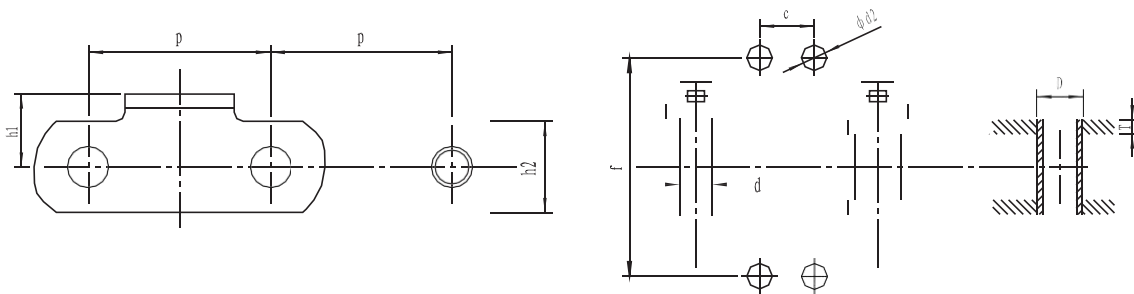


链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b1 (mm)	套筒直径 D (mm)	销轴直径 Diameter of pin d (mm)	链板厚度 Thickness of sidebar s (mm)	链板高度 Height of sidebar h2 (mm)	附耳中心高 h1 (mm)	附耳孔中心距 f (mm)	附耳孔间距 c (mm)	附耳孔直径 d2 (mm)	重量 Weight q (kg/m)
SDB400	250	40	36	20	8	60	55	130	85	14	15.4
SDB400S	200	50	F120/90	20	6	55	24	120	100	14	22.4
SDB500	160	42	36	20	8	60	55	140	50	14	12.5
	250	44	36	21	8	60	55	140	85	18.5	15.4
SDB630	250	62	45	30	10	80	75	162	85	18.5	25.7
SDB600	250	64	50	36	10	90	90	170	250	17	29
SDB800	250	64	50	36	12	90	90	170	250	17	33

NSE Type Chains

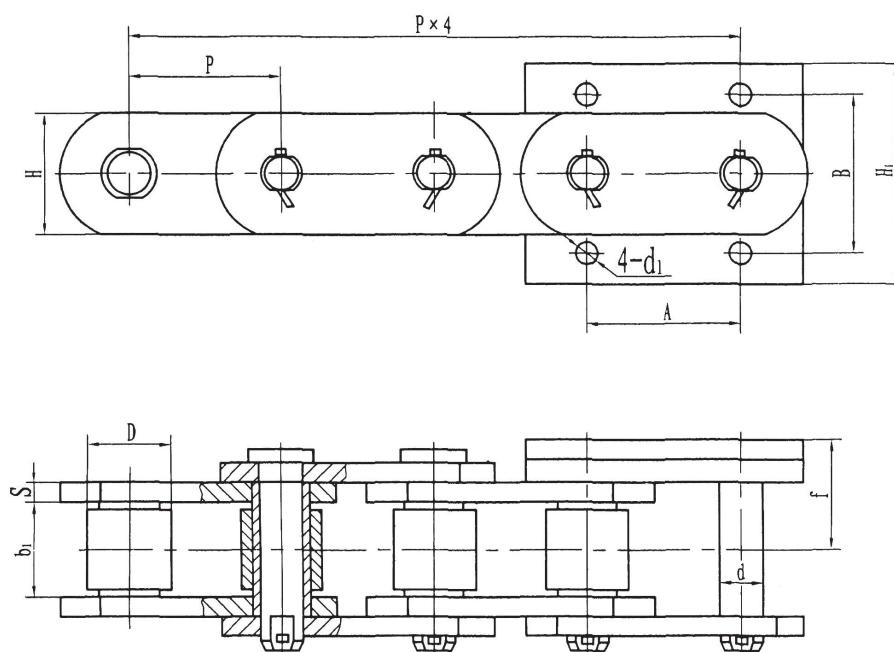



链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b1 (mm)	滚子直径 Diameter of roller D (mm)	销轴直径 Diameter of pin d (mm)	销轴长度 Length of pin L (mm)	链板厚度 Thickness of sidebar S (mm)	直链板宽度 Width of sidebar H (mm)	装斗板宽度 H1 (mm)	装斗孔距离 A×B (mm)	装斗孔直径 d1 (mm)	重量 Weight (kg/m)
NSE100 NSE200	100	52	44.5	19.1	120	10	60	150	100×105	18	24.5
NSE300	100	57.6	48.5	22.2	126	10	75	150	100×105	18	29
NSE400 NSE500	125	67.4	63.5	31.75	146	12	90	180	125×130	18	52
NSE600	125	75	70	35	170	16	100	180	125×130	18	68
M150A	150	37	35	18	86	8	50	125	75×80	14	13.6
M125A	150	68	60	36	140	12	90	180	125×140	18	47.5
M100A	100	57	50	30	120	10	75	155	100×115	16	33
M224-75	75	42	36	18	94	8	50	110	75×80	14	19
M315-75	75	48	42	21	100	8	56	145	75×100	18	24.3
M224-200	200	42	36	18	94	8	50	136	100×100	14	12.7

M1 Type Chains

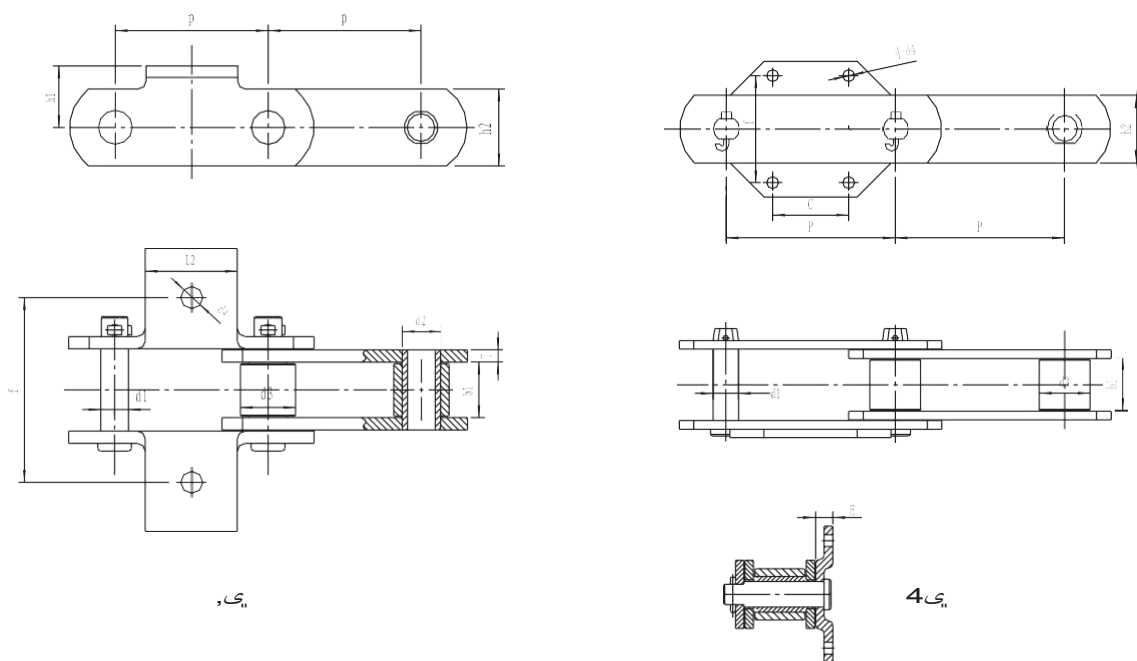

链号 Chain No.	节距 Pitch	内节内宽 Inner width of inner link	销轴直径 Diameter of pin	套筒直径	滚子直径 Diameter of roller	附件孔径	附件孔距	附件宽度	附件孔距	附件高度	链板厚度 Thickness of sidebar	抗拉强度 Tensile strength (KN)
	P (mm)	b1 (mm)	d1 (mm)	d2 (mm)	d3 (mm)	d4 (mm)	f (mm)	L2 (mm)	C (mm)	E (mm)	T (mm)	
M112K	100	31	15	21	30	14	110	60			6	112
M160K	100	36	18	25	36	14	120	60			7	160
M160S	100	36	18	25	36	9	70		42	22	7	160
M224S	125	44	21	30	42	12	84		50	22	8	224
M315S	160	47	25	36	50	14	92		80	26	10	315
M450S	200	62	30	42	60	14	126		90	20	10	450

O Type Chains

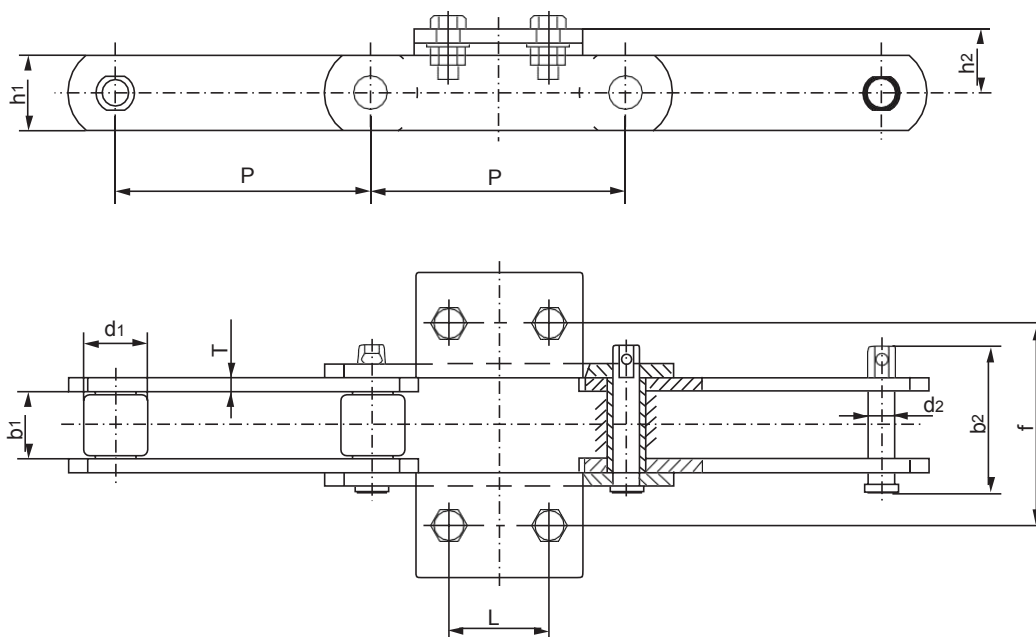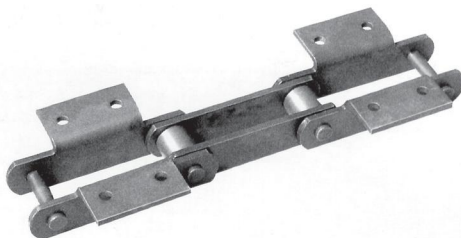


斗式提升机链适用于粉末状、颗粒状及小块状的水泥、粉尘、谷物、砂石和煤炭等散状物料的运输设备。

The bucket lifter chain is suitable for conveyor device used in bulk materials such as cement, powder, grain powder, sand and coal in powder, pellet or small lump styles.

链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b1 (min) (mm)	滚子直径 Diameter of roller d1 (max) (mm)	链板高度 Height of sidebar h1 (mm)	链板厚度 Thickness of sidebar T (mm)	销轴长度 Length of pin b2 (mm)	销轴直径 Diameter of pin d2 (mm)	附件尺寸 Dimensions of attachment			抗拉强度 Tensile strength Q (KN)
								L (mm)	f (mm)	h2 (mm)	
DT-10	100.0	20.5	44	26	4	42	9.54	40	69	25	82.0
DT-15A	101.6	15.7	38.1	26	4	37.1	9.54	40	63.5	22.3	82.0
DT-15B	101.6	31	44.45	38	7.9	75.5	15.88	40	110	35	140.0
DT-50	160.0	33.7	38.0	50	8	82.5	15.88	60	130	50	240.0
DT-35	160.0	36	37.5	40	6	73.0	15.88	60	130	35	180.0
DT-30D	152.4	37	38.1	45	8	86.6	16.0	60	120	37.5	224.0
DT-30A	152.4	40	38.1	45	8	89.6	16.0	60	120	37.5	224.0
DT-150	200.0	57.6	48.5	75	10	126	22.2	80	160	40	400.0
DT-200	250.0	67.4	63.5	90	12	146	31.25	120	200	75	580.0

P Type Chains

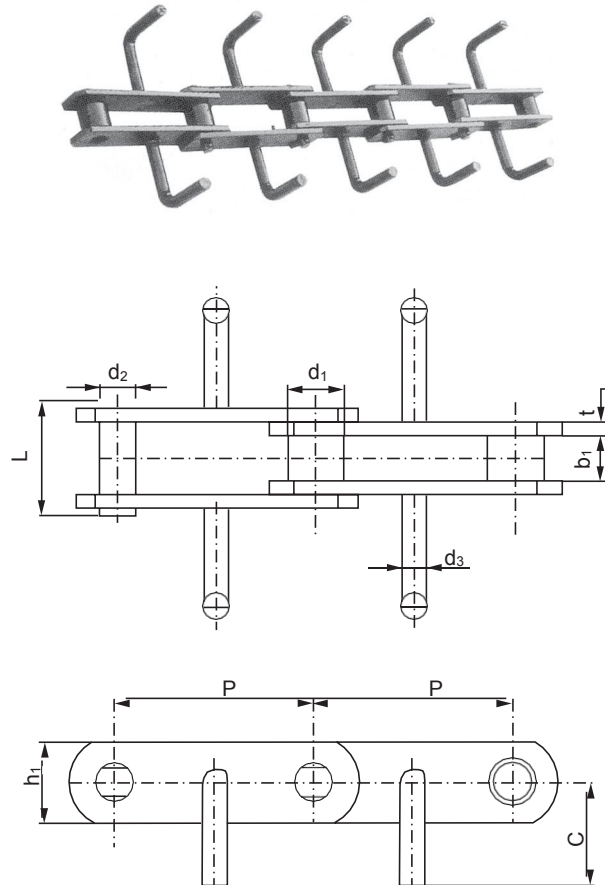


FU链运机链主要用于矿山、冶金、水泥、筑路行业的粉末输送设备。


FU style chain is mainly used in Powder conveyor in mine, metallurgy, cement and road making industries.

链号 Chain No.	节距 Pitch P (mm)	滚子直径 Diameter of roller d1(max) (mm)	销轴直径 Diameter of pin d2 (mm)	销轴长度 Length of pin L (mm)	内节内宽 Inner width of inner link b1(min) (mm)	链板厚度 Thickness of sidebar t (mm)	链板高度 Height of sidebar h1 (mm)	附件高度 Height of attachment C (mm)	附件直径 Diameter of attachment d3 (mm)	抗拉强度 Tensile strength Q(min) (KN)
FU机型提升链 Lifting Chain for FU Model Machine										
FU150-101.6	101.6	26.5	11.50	70	27.0	6	35	42.5	12	126.0
FU200-152.4	152.4	35.0	15.50	90	36.5	8	50	65.0	16	244.0
FU270-152.4	152.4	36	15.50	90	36.5	8	50	85.0	16	244.0
FU350-200	200.0	44.5	19.10	120	51.8	10	60	129.0	20	292.8
FU410-200	200.0	44.5	19.10	120	51.8	10	60	148.0	20	292.8
FU500-300	300.0	63.5	31.75	141	67.4	12	90	180.0	28	410.0
FU600-300双	300.0	48.5	22.20	126	57.4	10	75	215.0	25	310.0

Q Type Chains




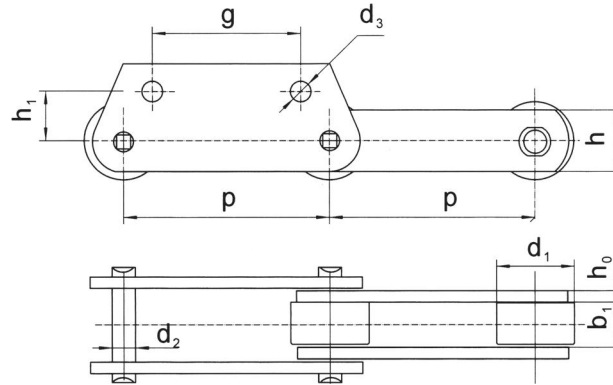


链号 Chain No.	节距 Pitch	内节内宽 Inner width of innerlink	滚子直径 Diameter of roller	销轴直径 Diameter of pin	链板高度 Height of sidebar	链板厚度 Thickness of sidebar	各部位参数 Various part dimension			极限拉伸载荷 Ultimate tensile strength (KN)	每米重量 Weight per meter (kg/m)	备注
	P (mm)	b1 (mm)	d1 (mm)	d2 (mm)	h (mm)	b0 (mm)	h1 (mm)	g (mm)	d3 (mm)			
1	400	65	120	34	100	14	110	300	25	1098	46	D191-6-1-1P
2	250	55.2	95	28	75	14	110	180	25	735	39	D214-3-1-1P
3	315	55.2	120	28	85	14	110	200	25	883	44	D277-4-1-3P
4	250	55.2	70	24	60	10	120	180	25	490	24.1	D363-3-1-1P
5	250	55.2	95	28	75	14	120	180	25	490	39	D382-3-1-1P
6	315	65	120	34	100	14	110	200	25	1471	52	D380-7-1-1P
7	250	58	80	25.7	60	10	115	180	21	343	29	YKD250
8	250	65	130	36	105	16	127	80	26	618	90	CJ102. 15. 03. 01

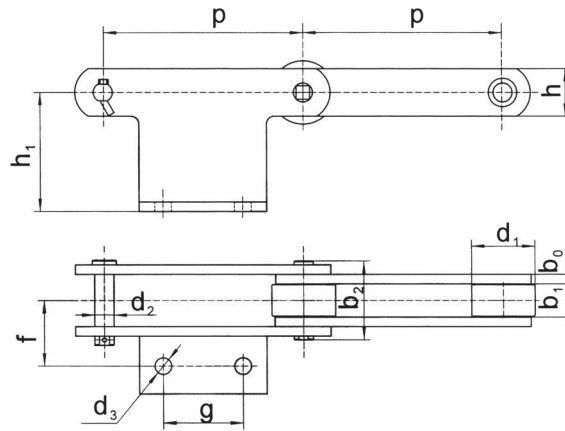


链号 Chain No.	节距 Pitch	内节内宽 Inner width of innerlink	滚子直径 Diameter of roller	销轴直径 Diameter of pin	链板高度 Height of sidebar	链板厚度 Thickness of sidebar	横向距离 Transverse distance	附件孔距 Hole distance of accessories	附件孔径 Bore diameter of accessories	平台高度 Height of platform	极限拉伸载荷 Ultimate tensile strength (KN)	每米重量 Weight per meter (kg/m)	备注
	P (mm)	b1 (mm)	d1 (mm)	d2 (mm)	h (mm)	h0 (mm)	f (mm)	g (mm)	d3 (mm)	h1 (mm)			
1	250	55.2	95	28	75	14	110	100	25	125	735	39	D207-3-2-2P
2	250	42	80	24	60	12	83	100	21	150	539	33	D249-3-4P
3	250	55.2	95	28	75	14	93	100	25	160	735	41	D278-3-1-1P
4	250	55.2	95	28	75	14	93	100	25	150	735	40	D289-2-1-1P
5	250	60	80	26	80	10	85	80	14	70	560	32	
6	400	65	120	40	100	16	125	140	26	150	1400	54	D152-8-2P

R Type Chains

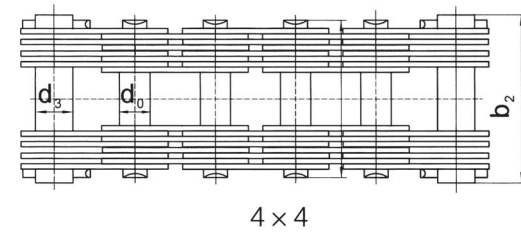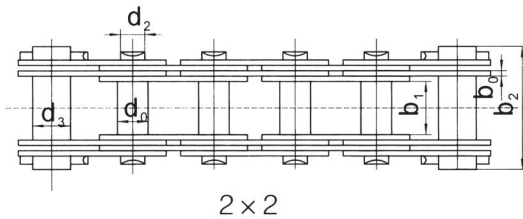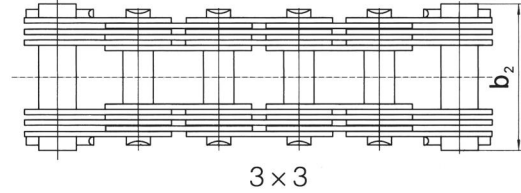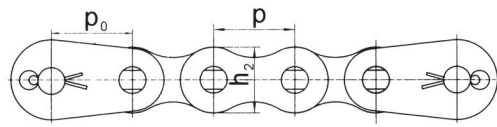


链号 Chain No.	组合形式 Lacing	节距 Pitch		销轴直径 Diameter of pin d2 (mm)	各部位参数 Various part dimension					销轴长度 Pin length b2 (mm)	极限拉伸载荷 Ultimate tensile strength (KN)	每米重量 Weight per meter (kg/m)
		P (mm)	P0 (mm)		d0 (mm)	d3 (mm)	h2 (mm)	b0 (mm)	b1 (mm)			
B159	2×2	110	—	42	48	—	82	16	62	219	1600	76.52
B127	2×2	180	—	60	70	—	120	16	66	232	2200	110
B156	2×2	200	—	65	75	—	140	20	90	286	3900	157.1
B142	2×2	200	—	70	80	—	140	20	90	285	3300	159.5
B138	2×2	200	—	45	52	—	90	15	60	230	1700	73
B136	2×2	250	—	75	84	—	150	22	100	312	4000	184
B148	3×3	110	—	40	47	—	75	10	60	220	1600	73.75
B121	3×3	110	—	44	50	—	90	8	90	236	1250	82
B131	3×3	170	—	60	70	—	130	16	135	403	4000	135
B157	3×3	80	—	28	32	—	52	5	50	162	650	31.77
B141	4×4	90	110	35	40	—	70	6	70	204	800	58.6
B124	4×4	140	165	55	70	—	110	10	120	340	2500	147
B128	4×4	240	—	70	85	—	160	10	100	306	6700	182
B101	4×4	30	40	9	11	14	20	3	20	45	40	2.25
B102	2×2	35	45	11	13	15	24	3	22	56	63	4.6
B103	2×2	40	50	12	14	18	28	3	25	59	80	5.6
B104	2×2	45	55	15	17	21	37	3	30	68	100	7
B105	3×3	50	60	18	22	26	38	3	36	94	160	11.5
B106	3×3	60	70	22	26	34	46	4	45	120	250	20.5
B107	4×4	70	85	28	32	40	52	4.5	50	150	375	29
B108	4×4	80	95	32	36	45	60	5	60	170	500	38

S Type Chains

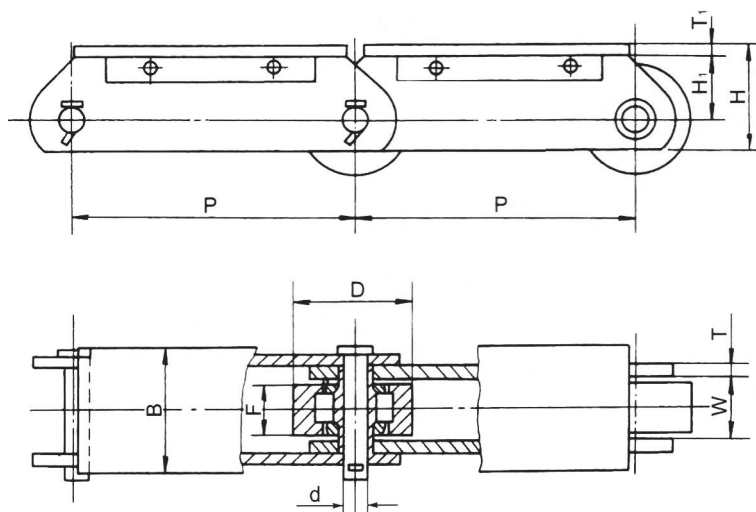



A型 (A Type)

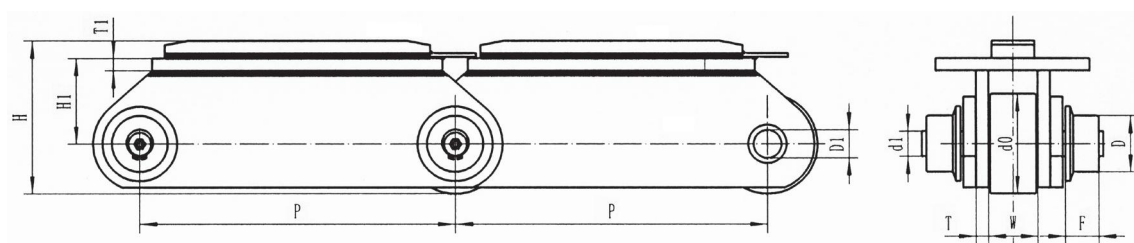


B型 (B Type)

链号 Chain No.	节距 Pitch	链板高度 Height of sidebar	链板厚度 Thickness of sidebar	平板厚度 Thickness of flatplate	A型 A type						B型 B type							极限拉伸载荷 Ultimate tensile strength (KN)
	P (mm)	H (mm)	H1 (mm)	T (mm)	T1 (mm)	W (mm)	B (mm)	d (mm)	D (mm)	F (mm)	W (mm)	B (mm)	d0 (mm)	d1 (mm)	D (mm)	F (mm)	D1 (mm)	
P150	150	90	50	6	8	40	90	12.7	70	35	32	140	42	20	65	22	21	175
P200	200	95	55	8	9	45	100	15.8	80	40	34	150	50	20	65	25	25	200
P250	250	104	64.5	9.5	9	51.4	110	19.1	95	44	36	160	55	25	70	25	30	250
P500	500	200	165	20	20						80	250	160	40	90	55	45	850

T Type Chains

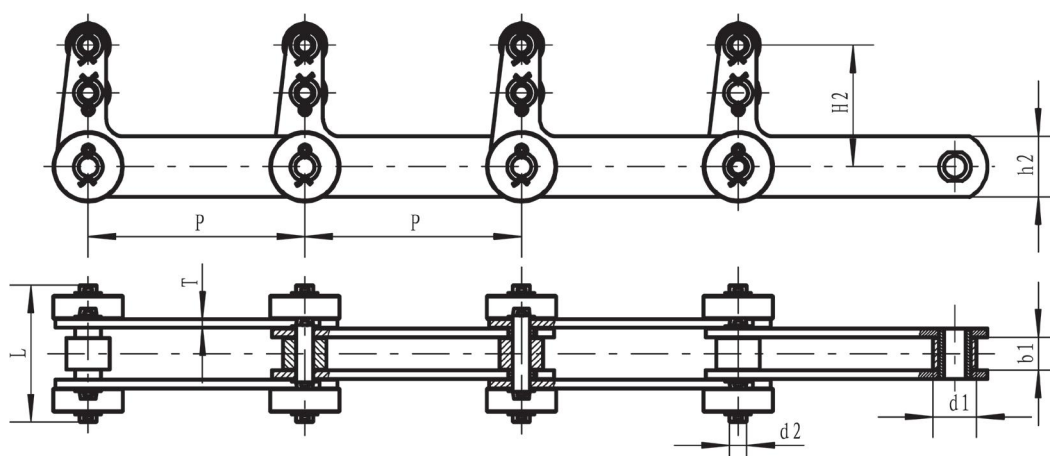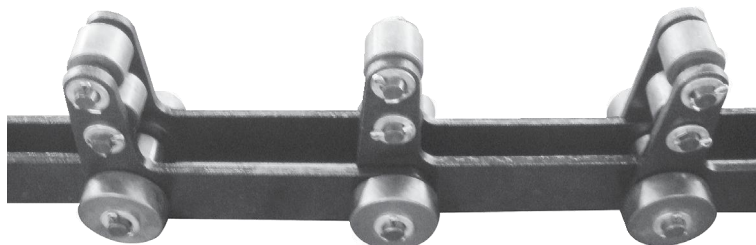


节距 Pitch P (mm)	内节内宽 Inner width of inner link b1 (mm)	滚子直径 Diameter of roller d1 (mm)	销轴直径 Diameter of pin d2 (mm)	销轴长度 Length of pin L (mm)	链板高度 Height of sidebar h2 (mm)	链板厚度 Thickness of sidebar T (mm)	顶置轮高度 Height of top chain H2 (mm)	抗拉强度 Tensile strength Q (KN)
250	38	50	25	160	70	10	140	320

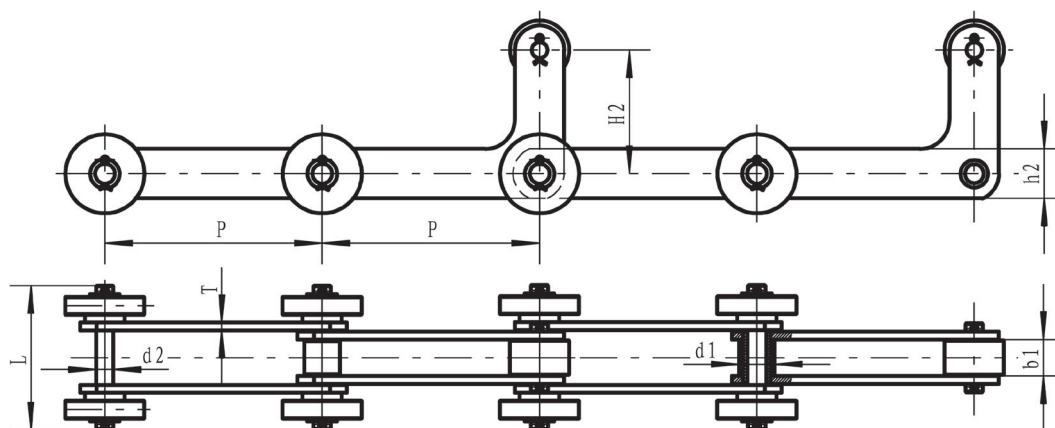


节距 Pitch P (mm)	内节内宽 Inner width of inner link b1 (mm)	滚子直径 Diameter of roller d1 (mm)	销轴直径 Diameter of pin d2 (mm)	销轴长度 Length of pin L (mm)	链板高度 Height of sidebar h2 (mm)	链板厚度 Thickness of sidebar T (mm)	顶置轮高度 Height of top chain H2 (mm)	抗拉强度 Tensile strength Q (KN)
220	37	36	19.05	146	50	8	125	200

U Type Chains


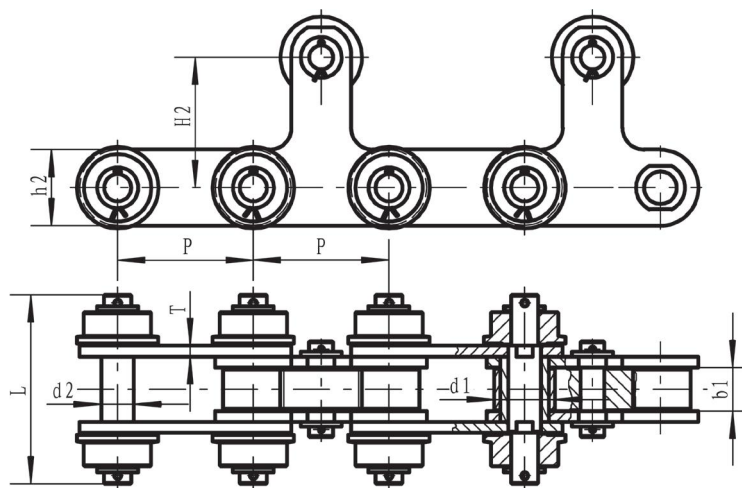


节距 Pitch P (mm)	内节内宽 Inner width of inner link $b1$ (mm)	滚子直径 Diameter of roller $d1$ (mm)	销轴直径 Diameter of pin $d2$ (mm)	销轴长度 Length of pin L (mm)	链板高度 Height of sidebar $h2$ (mm)	链板厚度 Thickness of sidebar T (mm)	顶板高度 Height of top sidebar $H2$ (mm)	抗拉强度 Tensile strength Q (KN)
125	40	56	30	176	70	10	120	315

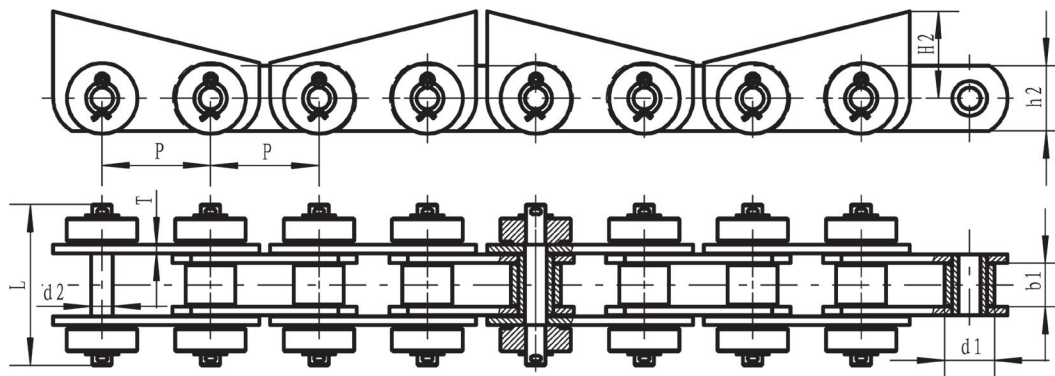



节距 Pitch P (mm)	内节内宽 Inner width of inner link $b1$ (mm)	滚子直径 Diameter of roller $d1$ (mm)	销轴直径 Diameter of pin $d2$ (mm)	销轴长度 Length of pin L (mm)	链板高度 Height of sidebar $h2$ (mm)	链板厚度 Thickness of sidebar T (mm)	顶置轮高度 Height of top chain $H2$ (mm)	抗拉强度 Tensile strength Q (KN)
100	40	46	20	148	60	8	80	175

V Type Chains

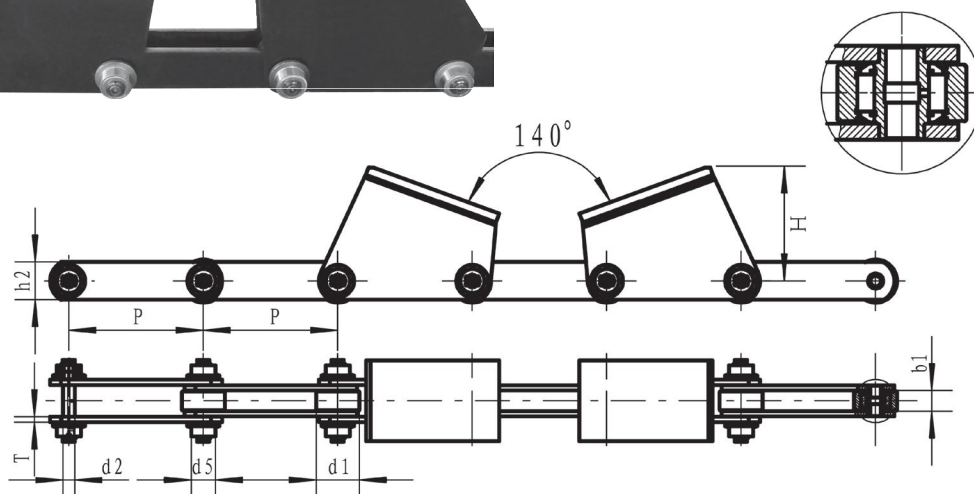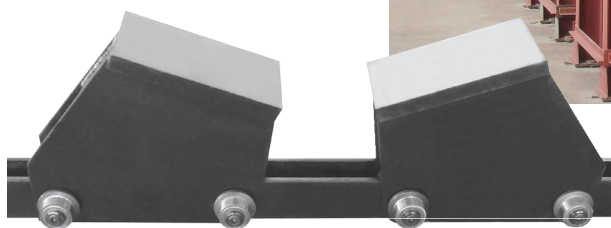


链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b1 (mm)	滚子直径 Diameter of roller d1 (mm)	销轴直径 Diameter of pin d2 (mm)	链板高度 Height of sidebar h2 (mm)	链板厚度 Thickness of sidebar T (mm)	外侧滚直径 Diameter of outer roller d5 (mm)	鞍座高度 H (mm)	抗拉强度 Tensile strength Q(min) (KN)
P250-A	250	80	100	53.5	150	25	160	862.5	1500
P250-B	250	80	100	53.5	150	25	160	312.5	1500
P250-C	250	80	100	53.5	150	25	160	862.5	1500
P500-A	500	76	160	44	140	20	90	721.9	1300
P500-B	500	80	160	44	140	20	90	514	1300
P500-C	500	80	160	44	140	20	90	420	1300

W Type Chains

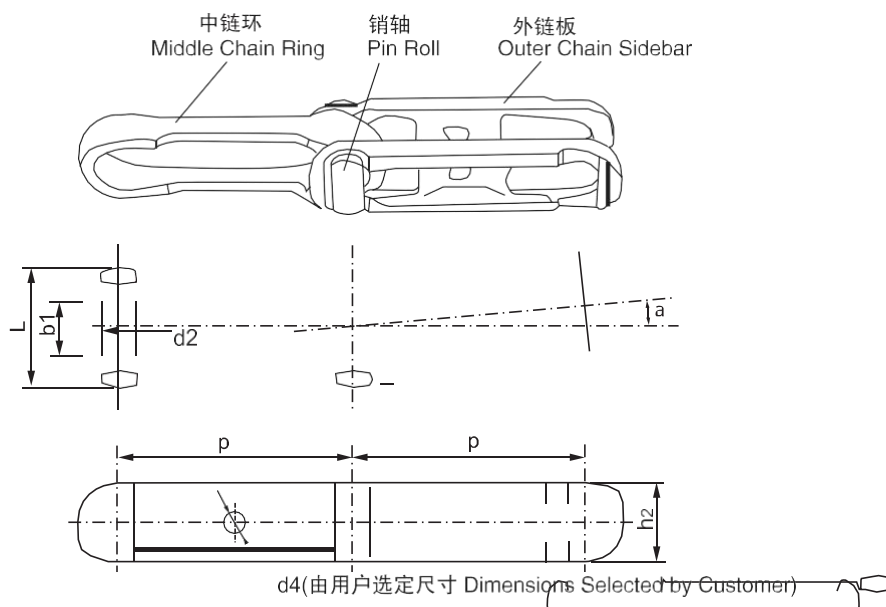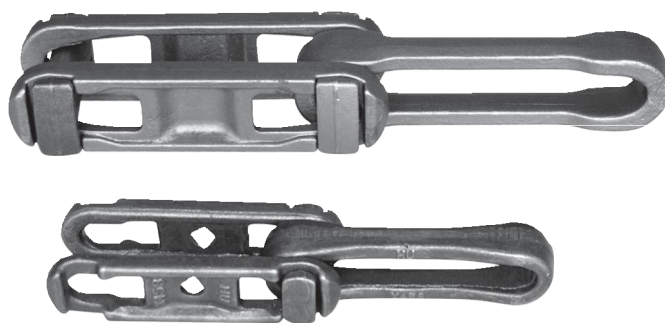


	链号 Chain No.	参考节距 Referenced pitch P (mm)	销轴直径 Diameter of pin d2 (mm)	销轴长度 Length of pin L (mm)	标准测量长度 Standard measurement length (min/max) (mm)	标准测量长度的节 距数 Number of pitch of standard measurement length	侧向转角 Side corner α (°)	链板宽度 Width of sidebar h2 (mm)	抗拉强度 Tensile strength (KN)	每米重量 Weight per meter (kg/m)
英制系列 British system series	X348	76.6	12.7	47	3050.5/3095.2	40	9	27	98	2.7
	X458	102.4	16	58	3063.1/3090.2	30	9	35	187	5.2
	468H	102.4	19.5	84.1	3063.1/3090.2	30	9	47.8	311.7	11.5
	X678	153.2	22.3	77	3055.1/3082.8	20	7	51.6	318	9.5
	698	153.2	28	95.3	3055.1/3082.8	20	7	60	515	17.0
	698H	152.4	39	154	3039.2/3066.6	20	7	72	1078	37.7
公制系列 Metric system series	F100X16	100.0	15.5	77	2991.3/3018.3	30	9	35	187	4.7
	F100X17	100.0	17	77	2991.3/3018.3	30	9	35	187	4.0
	F160X24	160.0	23.5	96	3190.7/3219.5	20	7	51.6	318	10.3

X Type Chains



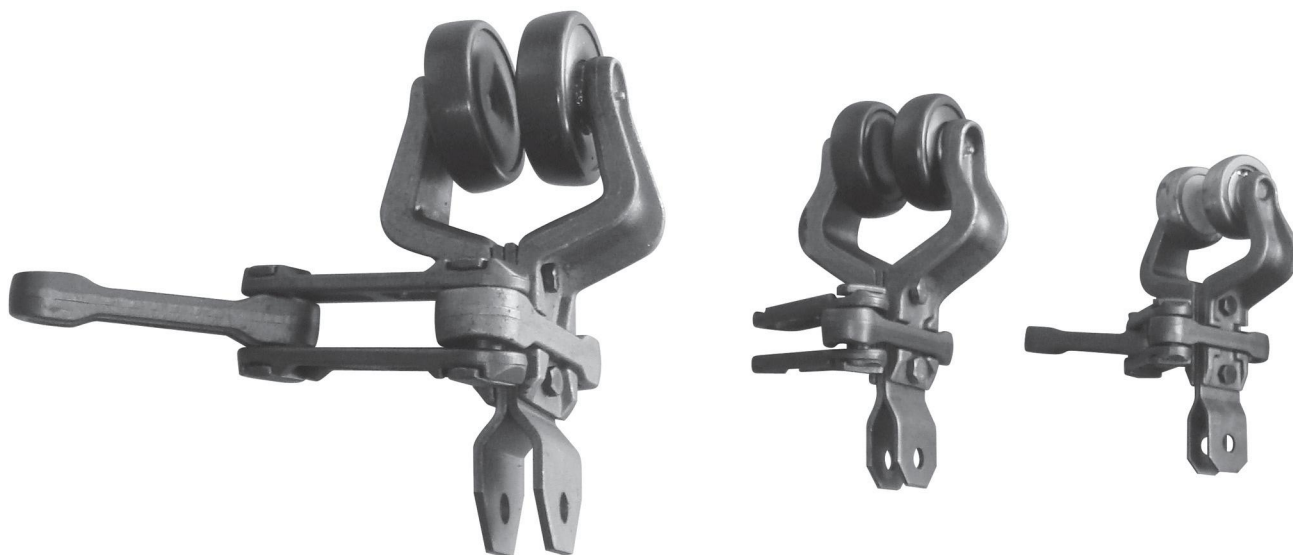


滑架的作用是承受物件，吊具及链条的重量，在垂直弯曲段还要承受链条张紧的合力，并能保证链条按轴道的线路运行。在线路中两个负载滑架之间距离超过800-900mm时，可在中间增加一个空载滑架。


The sliding frame is used to bear weight of objects, hoisting tool and chain and its vertical curved section shall also bear resultant force of tensioned chains and ensure running of chain along the channel of the shaft. In case the distance between two load slideing frames is over 800-900 mm, a free-load sliding frame can be added.

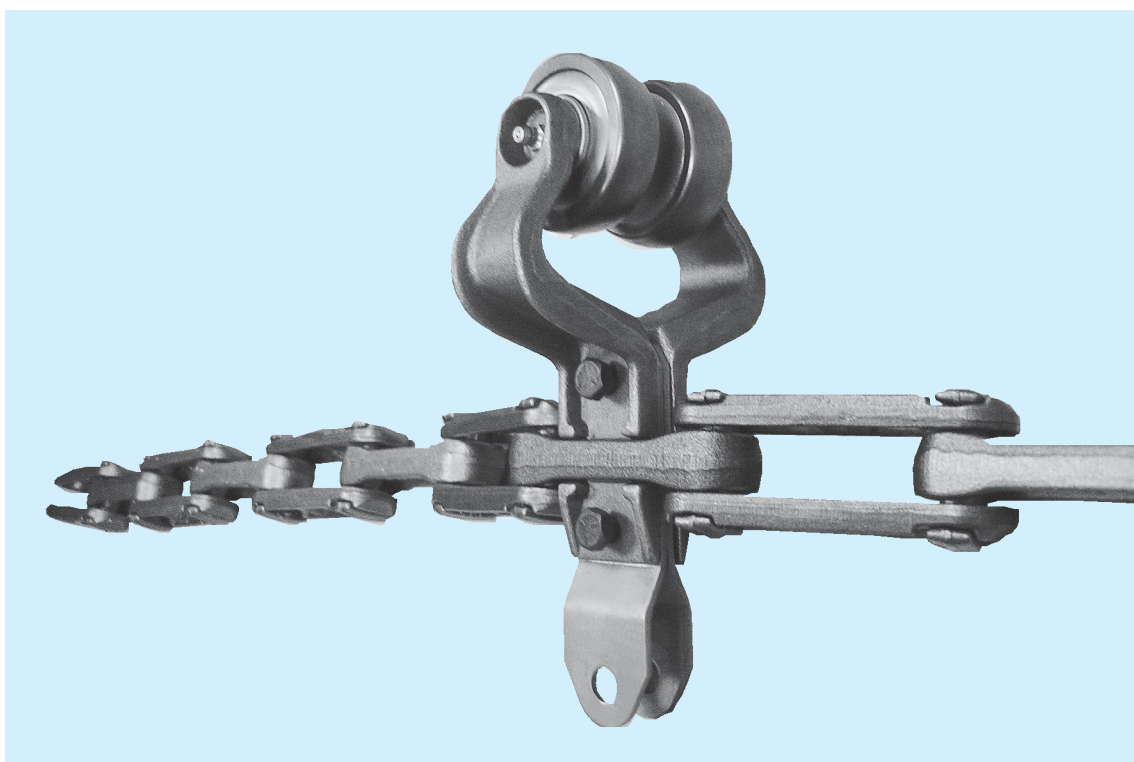

Y Type Chains

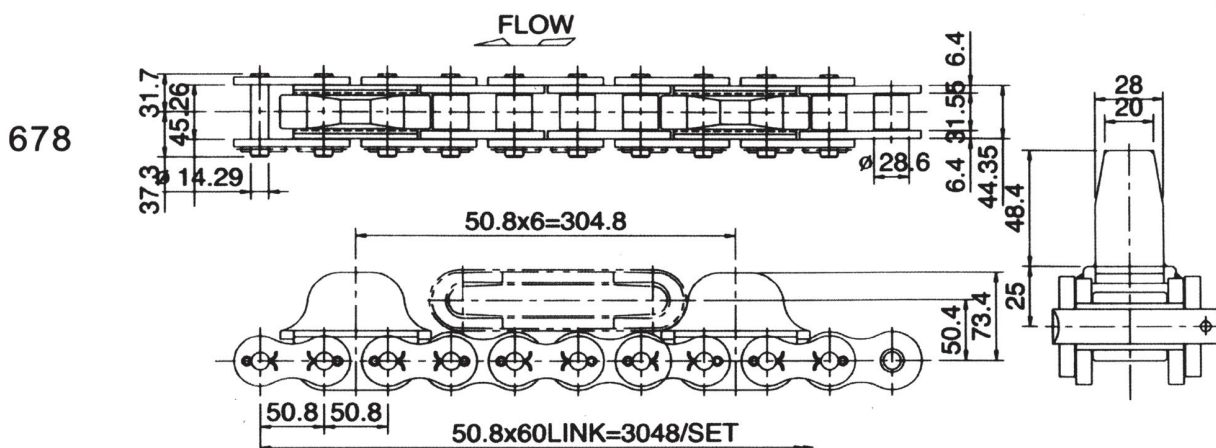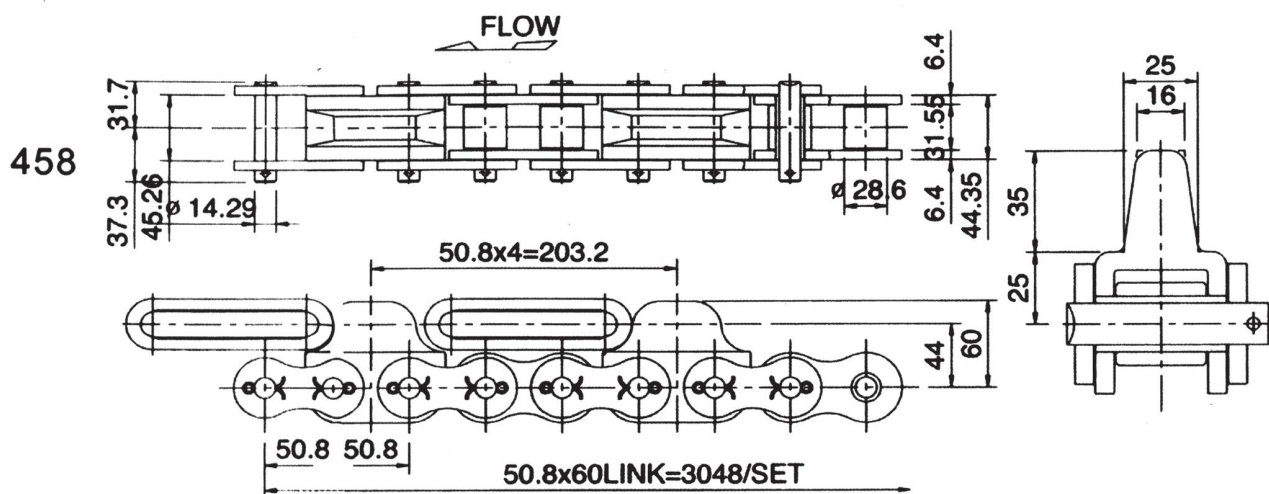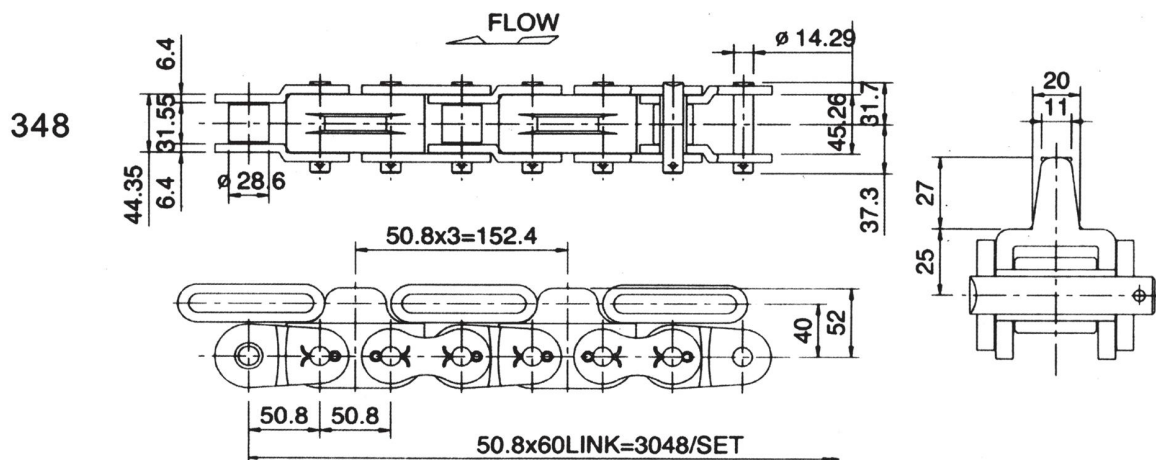


Z Type Chains

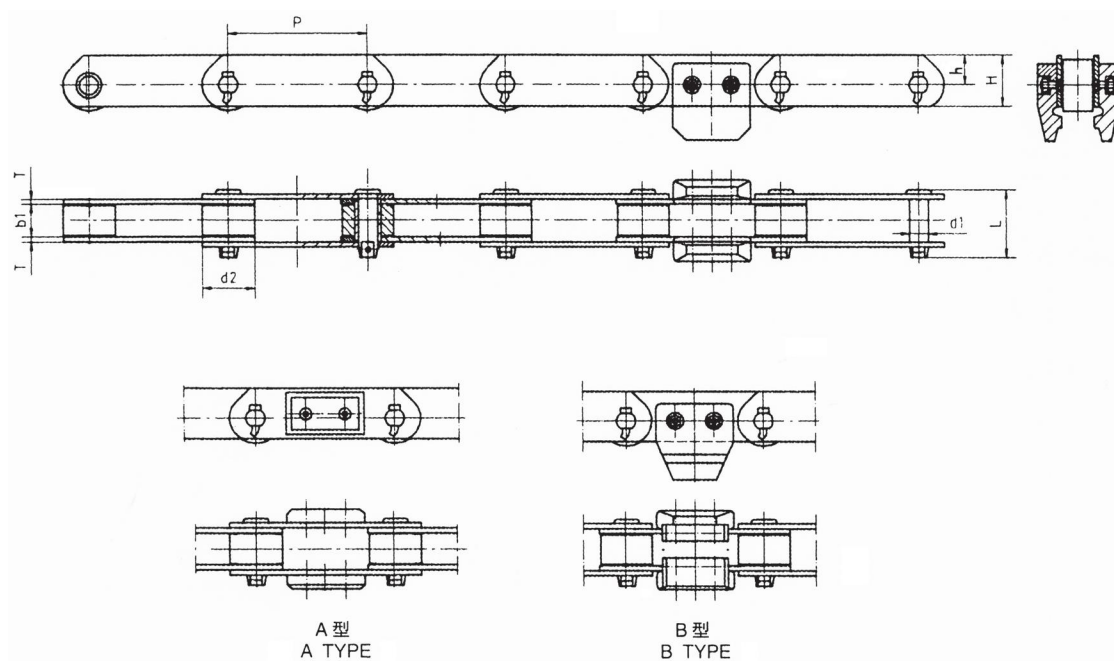


链号 Chain No.	节距 Pitch	内节内宽 Inner width of inner link	滚子直径 Diameter of roller	销轴直径 Diameter of pin	销轴长度 Length of pin	链板高度 Height of sidebar	链板高度 Height of sidebar	链板厚度 Thickness of sidebar	极限拉伸载荷 Ultimate tensile strength (KN)
	P (mm)	b1 min (mm)	d2 max (mm)	d1 max (mm)	L max (mm)	H max (mm)	h max (mm)	T max (mm)	
P160-1	160	38	50	22	78.5	60	35	6	160
P160-2	160	38	50	17	73.7	50	30	6	160

Z1 Type Chains

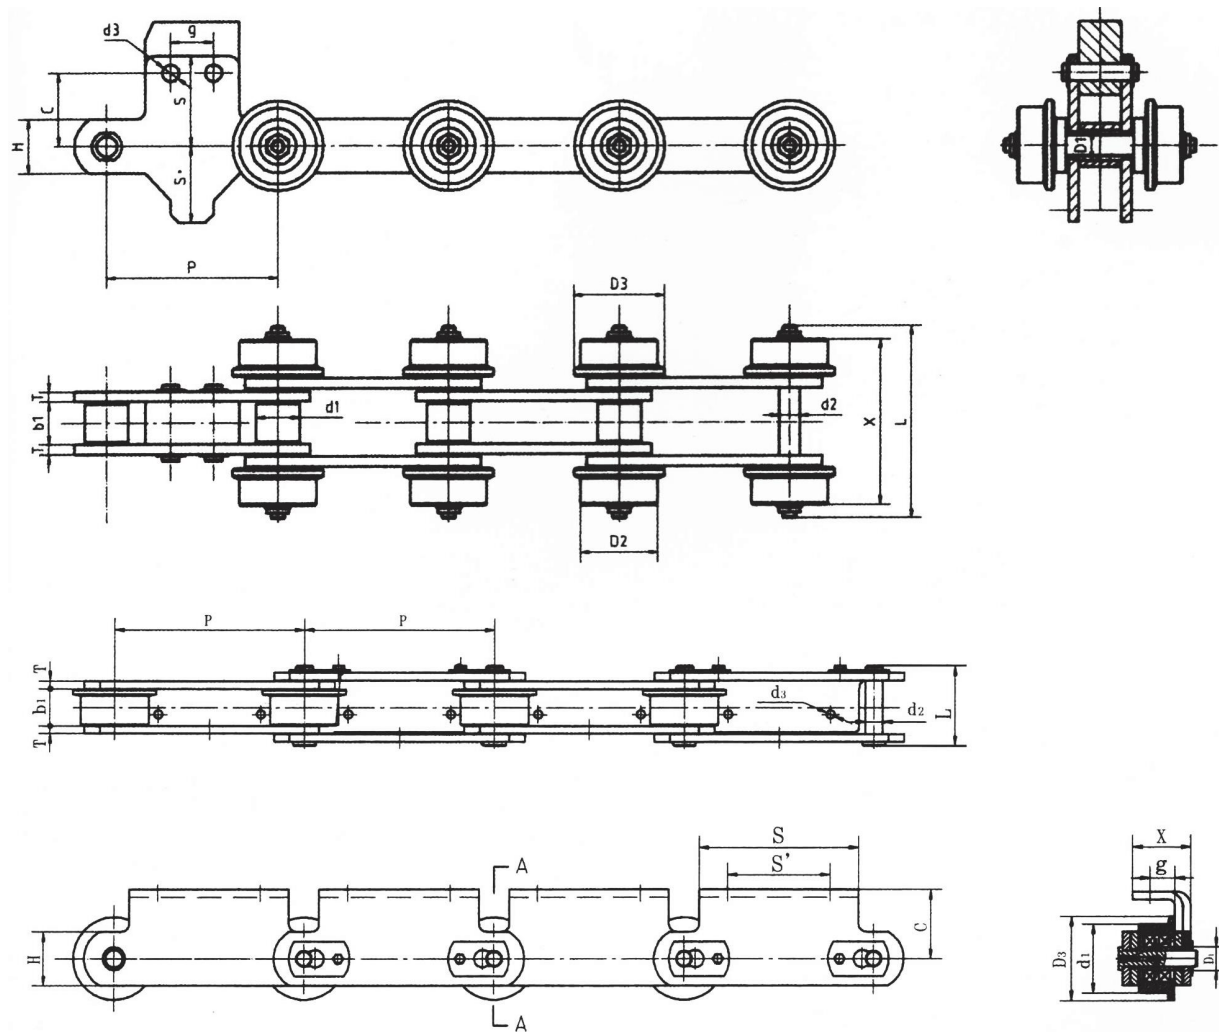

链号 Chain No.	节距 Pitch	内节内宽 Inner width of inner link	滚子直径 Diameter of roller	销轴 Pin		套筒外径	滚子直径 Diameter of roller			链板 Plate		附件 Attachment						极限载荷 Ultimate tensile strength (KN)
				直径 Diameter	长度 Length					高度 Height	厚度 Thickness							
	P (mm)	b1 min (mm)	d1 max (mm)	d2 max (mm)	L max (mm)	D1 (mm)	D2 (mm)	D3 (mm)	H max (mm)	T max (mm)	C (mm)	g (mm)	S (mm)	S' (mm)	X (mm)	d3 (mm)		
CPC100	100	25	25.4	12	113	17.6	45	53	32	6	43	25	53	45	97	10	70	
MC040939	250	48	90	21	104	28	—	108	70	10	90	33	210	135	77	11	300	
P200F80	200	42	60	20	98	30	—	80	50	10	65	24	140	100	38.5	12	280	
M160-P250	250	42	65	18	80	25	—	76	50	6	90	28	180	140	56	76	160	

Z2 Type Chains

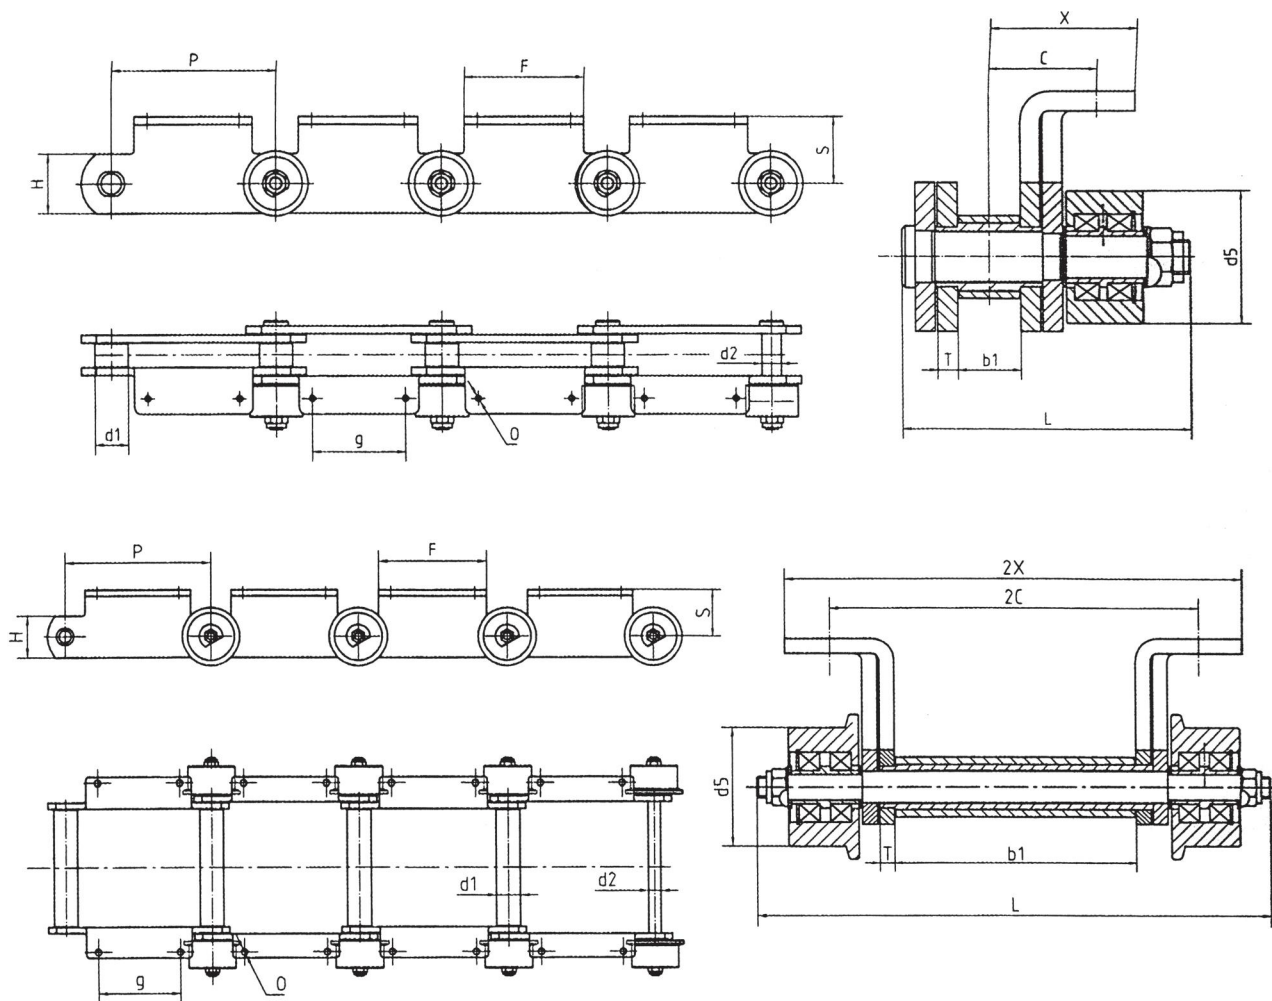

链号 Chain No.	节距 Pitch	内节内宽 Inner width of inner link	滚子直径 Diameter of roller	销轴 Pin		链板 Plate		滚子直径 Diameter of roller	附件 Attachment						极限载荷 Ultimate tensile strength (KN)
	P (mm)	b1 min (mm)	d1 (mm)	直径 Diameter	长度 Length	高度 Height	厚度 Thickness	d5 max (mm)	C (mm)	g (mm)	S (mm)	F (mm)	X (mm)	O (mm)	
MC1011.6	250	194	52	25.5	398	70	10	76	145	120	79	170	175	11	224
MC1011.5	250	38	50	30	173.3	90	12	80	66	140	100	180	89	M10	450
P160SSK2	160	82	50	30	328	64	8	85	125	85	100	115	155	9	160

