


PRODUCT FEATURES

- Ultrafast Reverse Recovery Time
- Soft Reverse Recovery Characteristics
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Leakage Current



APPLICATIONS

- Inversion Welder
- Uninterruptible Power Supply
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Converter & Chopper
- PFC

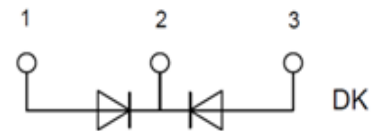

ABSOLUTE MAXIMUM RATINGS ($T_C = -25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
V_R	Maximum D.C. Reverse Voltage		700	V
V_{RRM}	Maximum Repetitive Reverse Voltage			
$I_{F(AV)}$	Average Forward Current	$T_C=90^\circ\text{C}$, Per Diode	100	A
		$T_C=90^\circ\text{C}$, Per Module	200	
$I_{F(RMS)}$	RMS Forward Current	$T_C=90^\circ\text{C}$, Per Diode	141	
I_{FSM}	Non Repetitive Surge Forward Current	$T_J=45^\circ\text{C}$, $t=10\text{ms}$, Sine, peak value	1200	
		$T_J=45^\circ\text{C}$, $t=8.3\text{ms}$, Sine, peak value	1320	
I^2t	For Fusing	$T_J=45^\circ\text{C}$, $t=10\text{ms}$, Sine, peak value	7200	A ² S
		$T_J=45^\circ\text{C}$, $t=8.3\text{ms}$, Sine, peak value	7230	
P_D	Power Dissipation		370	W
T_J	Junction Temperature		-40 to +150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range		-40 to +125	$^\circ\text{C}$
V_{isol}	Isolation Breakdown Voltage	AC, 50Hz(R.M.S), $t=1\text{minute}$	3000	V
Torque	Module to Sink	Recommended (M5)	2.5~4	Nm
Torque	Module Electrodes	Recommended (M5)	2.5~4	Nm
R_{thJC}	Junction to Case Thermal Resistance(Per Diode)		0.34	$^\circ\text{C}/\text{W}$
Weight			100	g

YZPST - MMF200N070DK

ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions	Min.	Typ.	Max.	Unit
I_{RM}	Maximum Reverse Leakage Current	$V_R = 700\text{V}$		0.5	mA
		$V_R = 700\text{V}, T_J = 125^\circ\text{C}$		5	
V_F	Forward Voltage	$I_F=100\text{A}$	1.2	1.6	V
		$I_F=100\text{A}, T_J=125^\circ\text{C}$	1.1		
t_{rr}	Reverse Recovery Time ($I_F = 1\text{A}, dI_F/dt = -200\text{A}/\mu\text{s}, V_R = 30\text{V}$)		50		ns
t_{rr}	Reverse Recovery Time		140		ns
I_{RRM}	Maximum Reverse Recovery Current		14.5		A
t_{rr}	Reverse Recovery Time		275		ns
I_{RRM}	Maximum Reverse Recovery Current		28		A

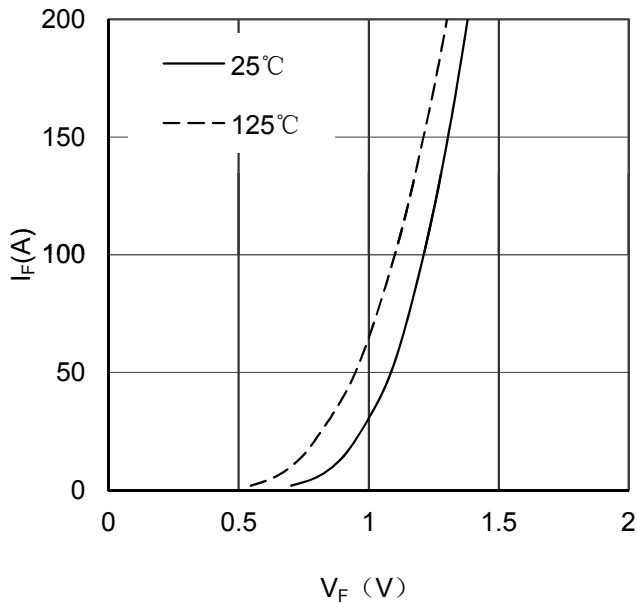


Figure 1. Forward Voltage Drop vs Forward Current

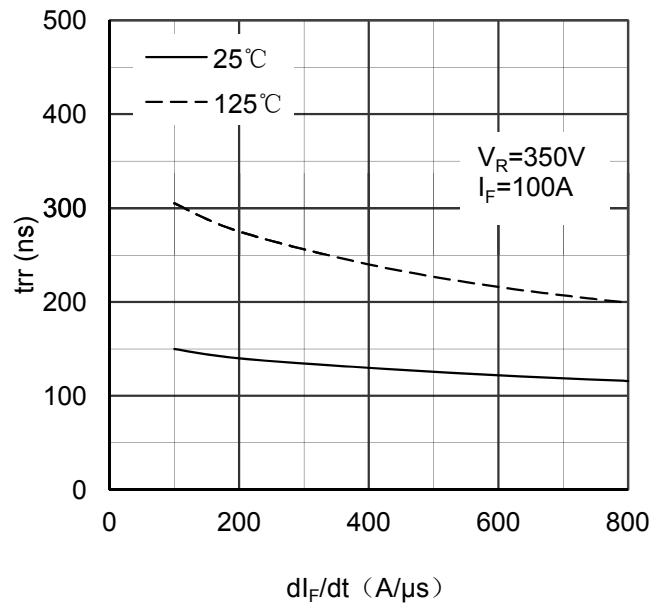


Figure 2. Reverse Recovery Time vs dI_F/dt

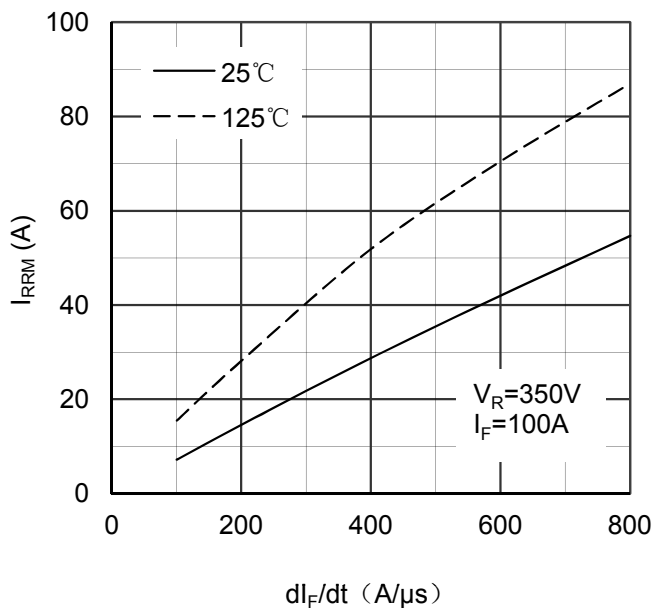


Figure 3. Reverse Recovery Current vs dI_F/dt

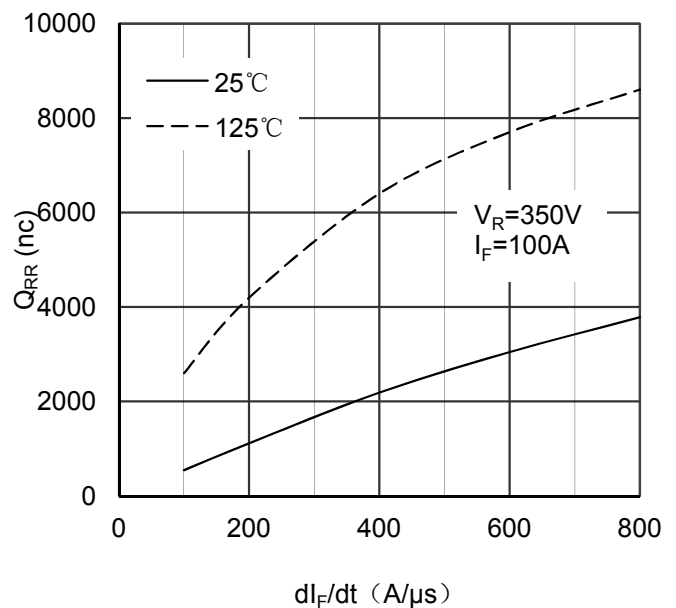


Figure 4. Reverse Recovery Charge vs dI_F/dt



Tel: +86-514-87782298, 87782296

E-mail: positioning@china.com;

Web Site: www.Pst888.com

FAX: +86-514-87782297, 87367519

info@yzpst.com;

www.yzpstoc.com

yzpst@pst888.com

www.yzpst.net

www.yzpst.com

YZPST - MMF200N070DK

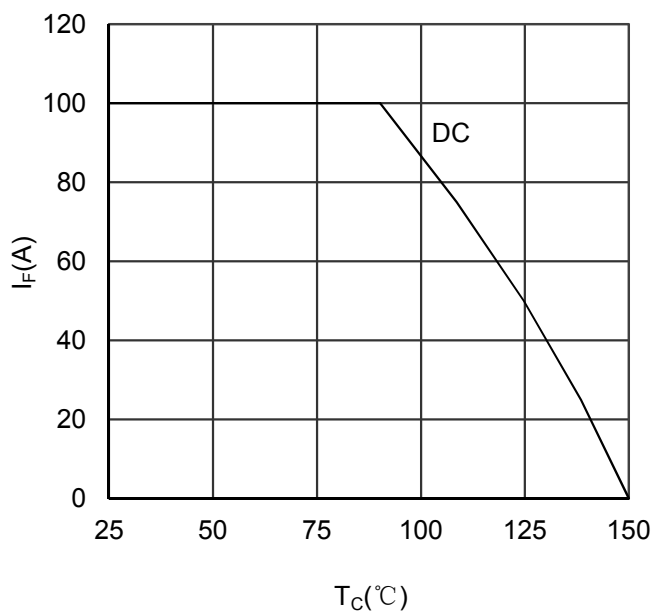


Figure 5. Forward current vs Case temperature


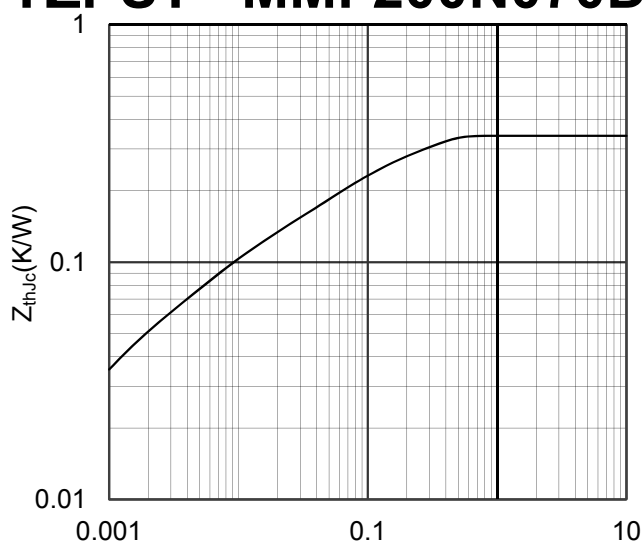


Figure 6. Transient Thermal Impedance



Dimensions in (mm)
Figure 7. Package Outline

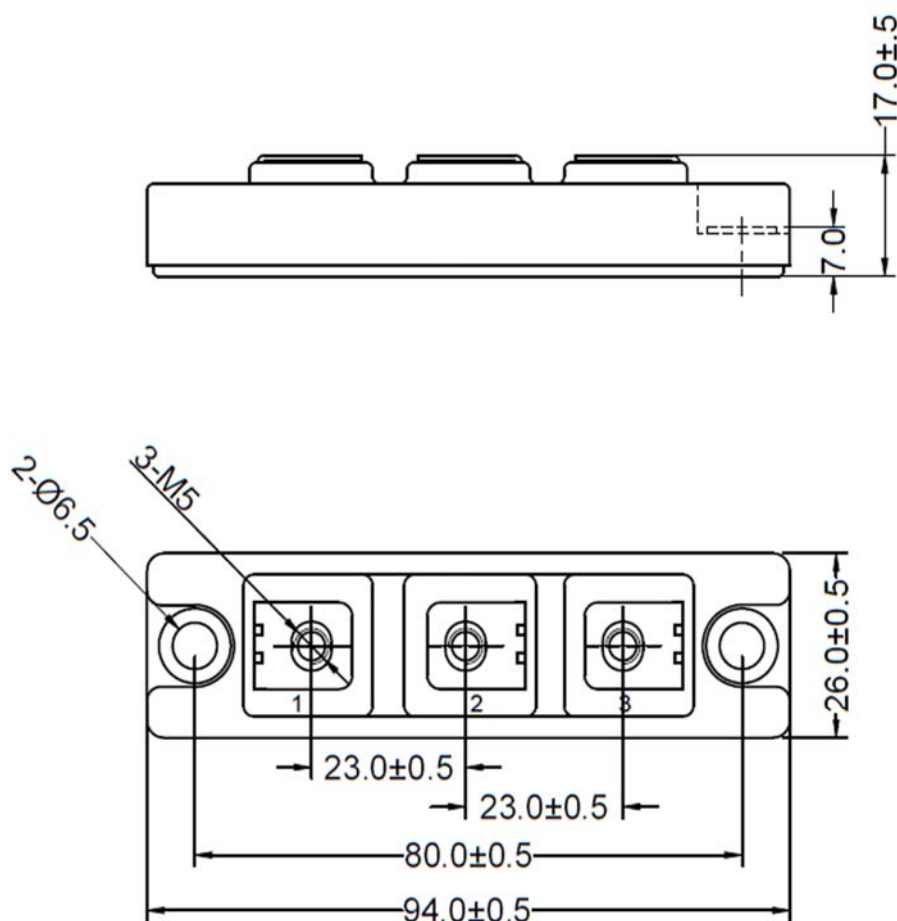

Tel: +86-514-87782298, 87782296

E-mail: positioning@china.com;

Web Site: www.Pst888.com

FAX: +86-514-87782297, 87367519

info@yzpst.com;

www.yzpstcc.com

yzpst@pst888.com

www.yzpst.net

www.yzpst.com