
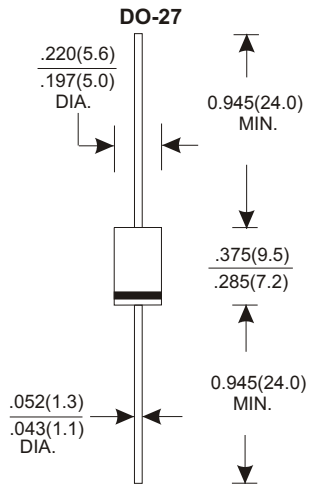


# YZPST-SB320THRU SB3200

## 3.0 AMP SCHOTTKY BARRIER RECTIFIERS

 <h3>FEATURES</h3> <ul style="list-style-type: none"> <li>* Low forward voltage drop</li> <li>* High current capability</li> <li>* High reliability</li> <li>* High surge current capability</li> <li>* Epitaxial construction</li> <li>* Both normal and Pb free product are available:</li> <li>* Normal:80~95%Sn,5~20%Pb</li> <li>* Pb free:99 Sn above can meet Rohs enviroment substance directive request</li> </ul> <h3>MECHANICAL DATA</h3> <ul style="list-style-type: none"> <li>* Case: Molded plastic</li> <li>* Epoxy: UL 94V-0 rate flame retardant</li> <li>* Lead: Axial leads, solderable per MIL-STD-202, method 208 guranteed</li> <li>* Polarity: Color band denotes cathode end</li> <li>* Mounting position: Any</li> <li>* Weight: 1.10 grams</li> </ul>	<p style="text-align: center;"><b>VOLTAGE RANGE</b> 20 to 200 Volts</p> <p style="text-align: center;"><b>CURRENT</b> 3.0 Ampere</p>  <p style="text-align: center;">Dimensions in inches and (millimeters)</p>
--	--

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unieess otherwies specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

TYPE NUMBER	SB320	SB330	SB340	SB360	SB380	SB3100	SB3150	SB3200	UNITS	
Maximum Recurrent Peak Reverse Voltage	20	30	40	60	80	100	150	200	V	
Maximum RMS Voltage	14	21	28	42	56	70	105	140	V	
Maximum DC Blocking Voltage	20	30	40	60	80	100	150	200	V	
Maximum Average Forward Rectified Current										
See Fig. 1									3.0	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)									80	A
Maximum Instantaneous Forward Voltage at 3.0A	0.55		0.70		0.75				V	
Maximum DC Reverse Current Ta=25°C									0.2	mA
at Rated DC Blocking Voltage Ta=100°C									30	mA
Typical Junction Capacitance (Note1)									250	pF
Typical Thermal Resistance R JA (Note 2)									20	°C/W
Operating Temperature Range Tj	-65 — +125			-65 — +150						°C
Storage Temperature Range TSTG									-65 — +150	°C

**NOTES:**

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Ambient Vertical PC Board Mounting 0.5"(12.7mm) Lead Length.

RATING AND CHARACTERISTIC CURVES SR320 THRU SB3200

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

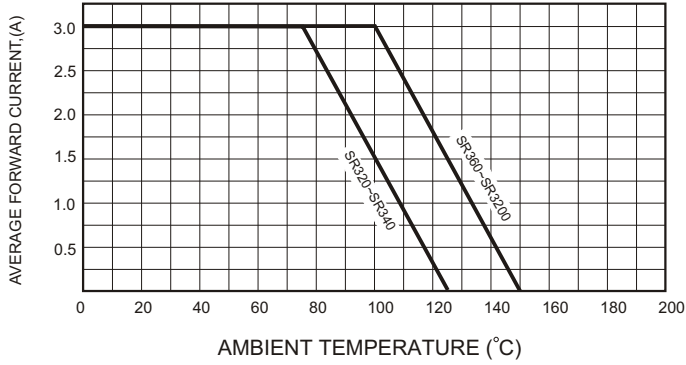


FIG.2-TYPICAL FORWARD CHARACTERISTICS

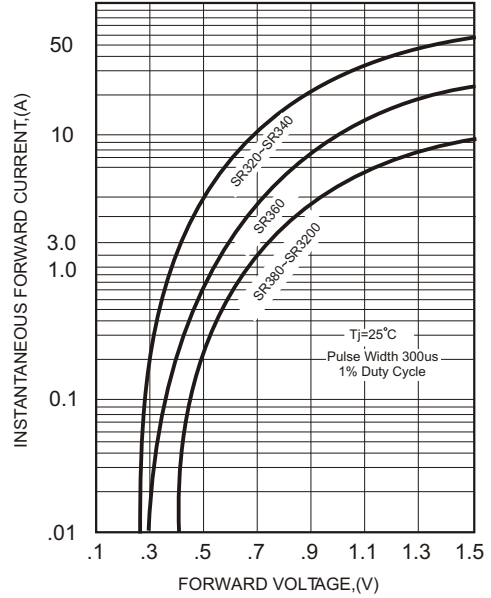


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

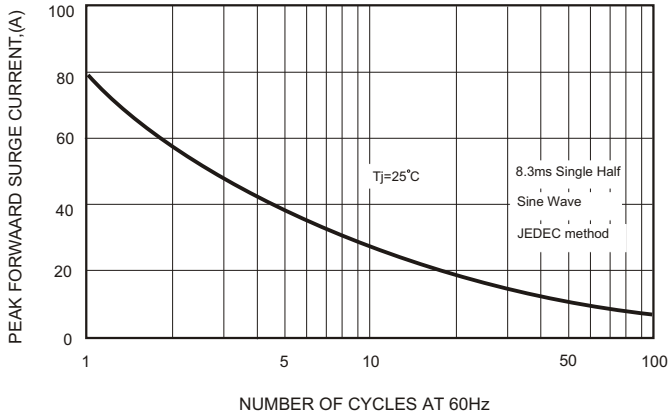


FIG.4-TYPICAL JUNCTION CAPACITANCE

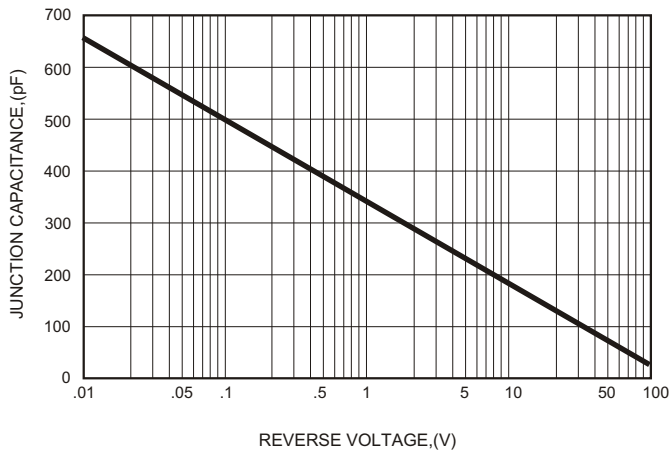


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

