

PPMS20 Series

● Key Features

- High Acceleration
- Low Noise
- Low Inertia





Step Angle Accuracy	±8%
Resistance Accuracy	±10%
Inductance Accuracy	±20%
Ambient Temperature	-10°C ~ 50°C
Insulation Resistance	100 MΩ Min.(At 500VDC)
Dielectric Strength	RMS for 2 Sec(At 650±50VAC)
Insulation Class	Class E

● Specifications

Series	Model Number	Holding Torque	Rated Current	Resistance per phase	Inductance per phase	Detent Torque	Rotor Inertia	Wiring Diagram	Drawing	No. of Phase	Step Angle
		g.cm	A	ohm	mH	g.cm	g.cm ²	Wdg	Fig		°
PPMS20L20	PPMS20L20-01	60	0.5	10	4.3	20	0.6	a	1	2	18
	PPMS20L20-02	40	0.39	13	7.4	20	0.6	b	2	2	18

● Typical Outline

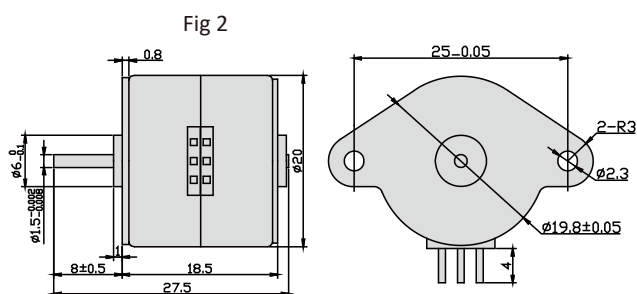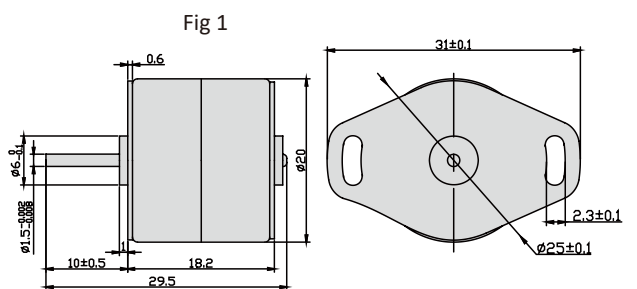

● Wiring Diagram

