

# PBLD-H22020A


## Standard High-Voltage Series



### Characteristics

- Input voltage: 110VAC~220VAC
- Continuous output current: 2A
- Speed control and analog volume voltage: 0~5V
- Working temperature: 0~+45°C
- Storage temperature: -20~+85°C
- Ambient humidity: <85%


### Dimension

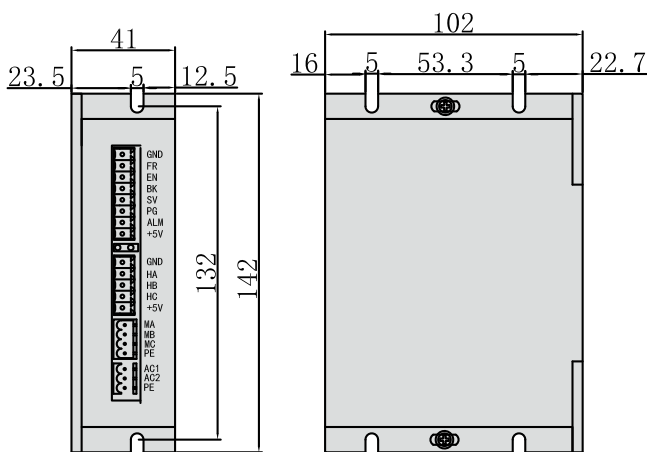

### Specification

- Can be set with Hall or without Hall sensing drive, both are compatible
- The whole series adopts high quality devices, the circuit design is simple and clear, and the cost control is low
- Support RS485 multi-axis communication control
- External analog, external pulse width input
- Start/stop control, forward/reverse control
- Electrical brake function, making the motor respond quickly
- Plugging protection, fast response time, high control accuracy
- Load without deceleration, power compensation, high starting torque
- Overload multiplier greater than 2, torque always reaches maximum at low speed
- Over-voltage, under-voltage, over-current, over-temperature, Hall signal illegal and other fault alarm functions

### Connection Diagram

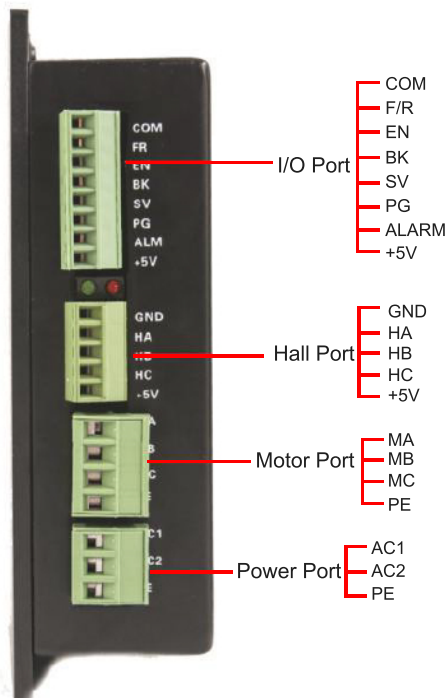

### Power input terminal

1	AC1	AC input
2	AC2	AC input
2	PE	Ground wire

### I/O control terminal

1	COM	Public ports
2	F/R	Forward and reverse
3	EN	Start Stop
4	BK	Brake Control
5	SV	Analog input
6	PG	Speed pulse signal output
7	ALARM	Alarm output
8	+5V	Speed regulation voltage output

### Motor input terminal

1	MA	Motor Phase A
2	MB	Motor Phase B
3	MC	Motor Phase C

### Hall input terminal

1	GND	Negative power supply for Hall signal
2	HA	Hall signal A
3	HB	Hall signal B
4	HC	Hall signal C
5	+5V	Positive power supply for Hall signal