


Specifications

- Input voltage: 12VDC or 24VDC or 36VDC or 48VDC
- Max thrust: 12000N
- Standard stroke: 50~1000mm
- Full load speed: 4.0mm/s~28.5mm/s
- No load speed: 5.5mm/s~35.0mm/s
- Duty cycle: 25%
- Ambient temp: -40℃~+65℃
- IP rating: IP65
- Built-in limit switch, non-adjustable
- Low noise design, ≤65dB
- CE certification
- Signal feedback: none or hall
- Color is black
- Applications: Agricultural machinery, lifting platform, machine tool, electric bed, harvester, baler, etc




Outline Drawing

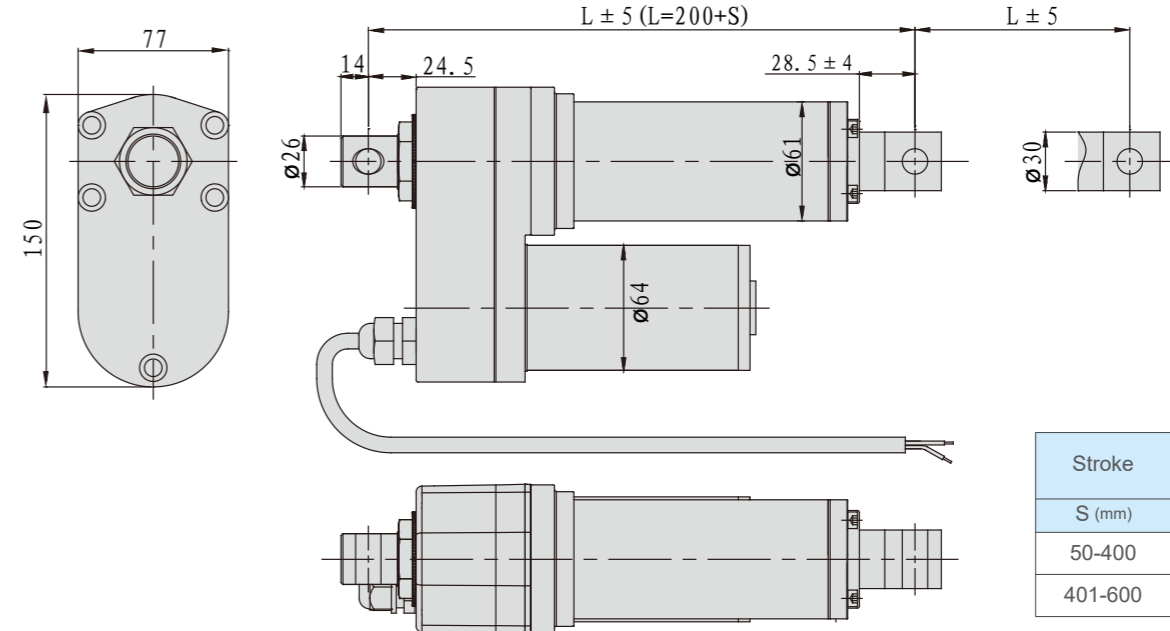

Technical Parameters

Transmission Code	A	B	C	D	E	F	
Max Dynamic Thrust	N	4000	3500	3000	2500	2000	1000
Self-locking Thrust	N	5000	5000	4000	3500	2500	2000
No Load Speed	mm/s	5.5	8.5	11.0	17.0	22.0	35.0
Full Load Speed	mm/s	4.0	7.0	9.5	14.0	18.0	28.5
Input Voltage	VDC	12 or 24 or 36 or 48					
Standard stroke	mm	50 to 1000					
Ambient Temperature	℃	-40 to 65					
Cable Length	mm	Customizable					
Color		Black					
Limit Switch		Build-in					
IP Rating		IP65					
Duty Cycle		25% (2 minutes of continuous work, 6 minutes of rest)					
Signal Feedback		None or hall					

Characteristic Curve

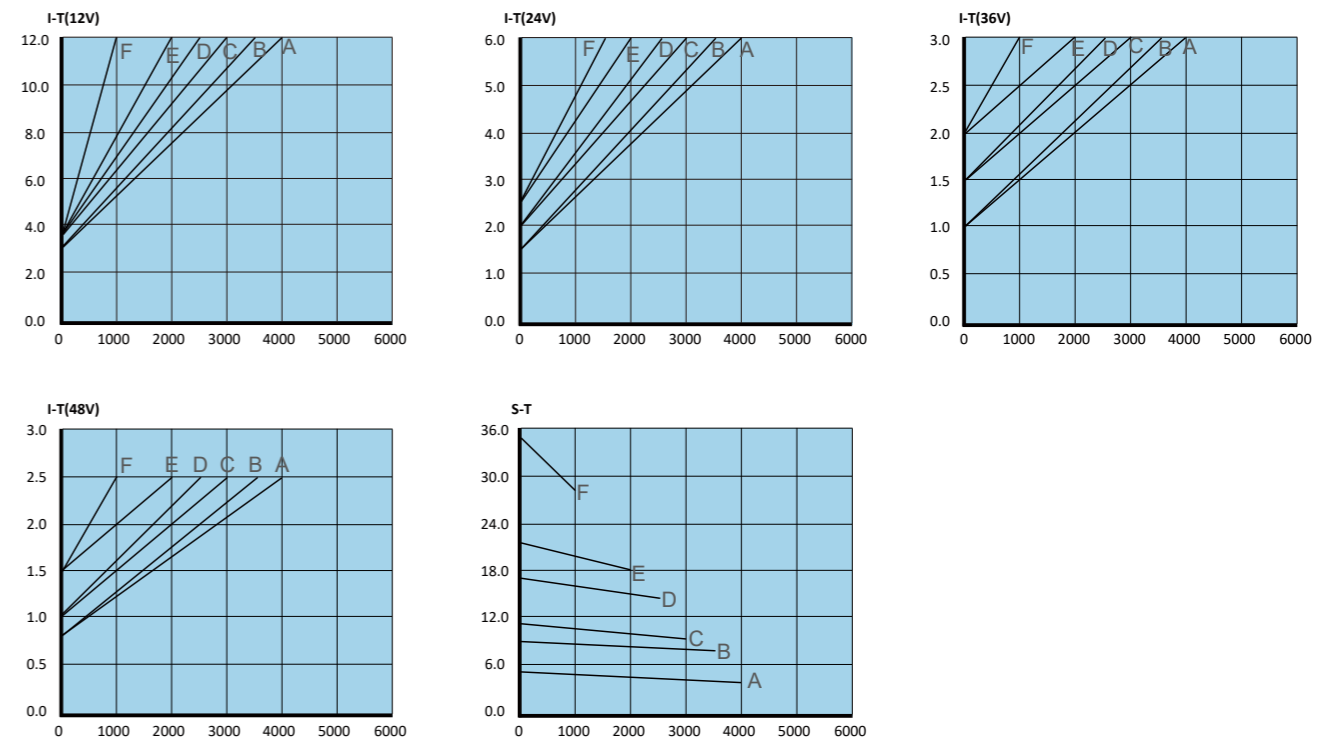

I:Current, T:Thrust, S:Speed