


Specifications

- Input voltage: 12VDC or 24VDC
- Max thrust: 150N
- Standard stroke: 10~400mm
- Full load speed: 3~55mm/s
- No load speed: 4.8~88mm/s
- Duty cycle: 20%
- Ambient temp: -20℃~+65℃
- IP rating: IP65
- Built-in limit switch, non-adjustable
- Low noise design, ≤60dB
- CE certification
- Signal feedback: none or hall
- Color is gray
- Applications: Yachts, electric doors, car tailgates, electric windows, etc



Outline Drawing

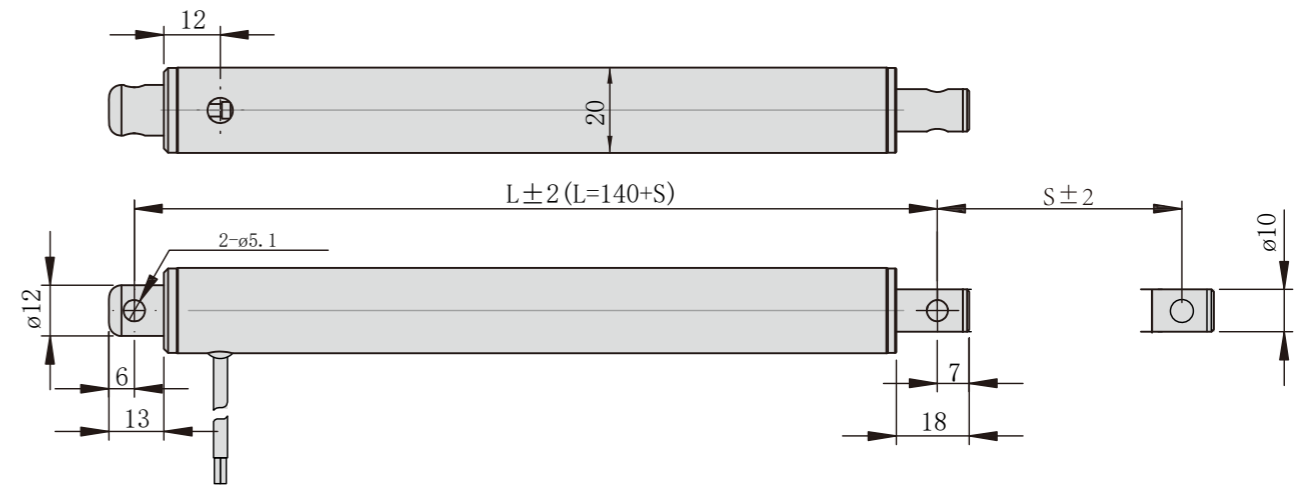


Stroke	Installation distance
S (mm)	L (mm)
50-299	+0
300-499	+15

Technical Parameters

Transmission Code	A	B	C
Max Dynamic Thrust	N 150	100	40
Self-locking Thrust	N 300	200	80
No Load Speed	mm/s 4.8	9.6	88
Full Load Speed	mm/s 3	6	55
Input Voltage	VDC 12 or 24		
Standard stroke	mm 50 to 400		
Ambient Temperature	℃ -20 to 60		
Cable Length	mm Customizable		
Color	Black or gray		
Limit Switch	Build-in		
IP Rating	IP65		
Duty Cycle	20% (2 minutes of continuous work, 8 minutes of rest)		
Signal Feedback	None or hall		

Characteristic Curve

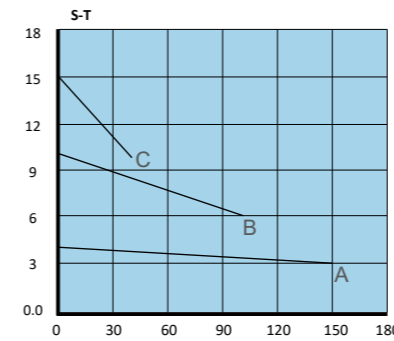

I:Current, T:Thrust, S:Speed