

FIRE DOOR FRAME CONSTRUCTION VIEW




MASONRY/STUD CONSTRUCTION FRAME



Wire Anchor



T Anchor




Universal Anchor




Tube Anchor

Jamb Depth	4-3/4 "	5-3/4 "	6-1/4 "	6-3/4 "	7-1/4 "	7-3/4 "	8-1/4 "	8-3/4 "	9-1/4 "	10-1/4 "
Throat Opening	3-3/4 "	4-7/8 "	5-1/4 "	5-3/4 "	6-1/4 "	6-3/4 "	7-1/4 "	7-3/4 "	8-1/4 "	9-1/4 "

DRYWALL FRAME

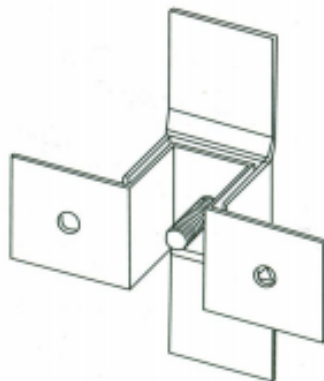

Compression Anchor

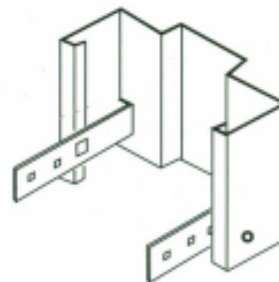

Snap in sill Anchor

Jamb Depth	4-3/4 "	5-7/8 "	6-1/4 "	6-5/8 "	7-1/4 "	7-3/4 "	8-1/4 "
Throat Opening	3-3/4 "	4-7/8 "	5-1/4 "	5-5/8 "	6-1/4 "	6-3/4 "	7-1/4 "

Frame Profiles



xunzhong steel fire doors conform or exceed SDI/HMMA industrial standards, fire tested and certified with UL, Intertek/WH from 20Min up to 3hrs fire rating, complying criteria as UBC7-2, ANSI/UL10C UL10B CAN/ULC-S104