



SINCE 2003

# DOOR

## SHANGHAI XUNZHONG INDUSTRY CO.,LTD



Website: [www.ulfiredoormfg.com](http://www.ulfiredoormfg.com)  
Address: Room C,FL 2,No.2633 Hunan Road,  
Pudong New District, Shanghai City, China  
Tel: 0086-21-20961002  
Fax: 0086-21-20961002  
E-mail: [info@ulfiredoormfg.com](mailto:info@ulfiredoormfg.com)





- Company Profile .....01
- Steel Fire Door .....04
- Wooden Fire Door .....14
- Certificates .....21
- Hospital Door .....22
- Operation Room Door .....23
- Sound-Proof Door .....25
- Wooden Door .....26

# CONTENTS

## Product Contents

- Explosion-Proof Door .....27
- Explosion Relief Door .....27
- Steel Shutter Door .....28
- Industrial Folding door .....30
- Factory .....31
- Hardware .....38





# • Company Introduction

---

---

Shanghai Xunzhong Industry Co., Ltd is a leading professional manufacturer of fire door&window and other special doors,located in the international metropolis -Shanghai, established in 2003.For promotion of business development,we set up a HongKong company called Branch:Lixin

Our Enterprise has more than 15 years experience with two production bases located in Shanghai and Jiangsu province, annual production capacity could reach 1 million sets of door Main products cover UL&CE fire door&fire window, explosion proof door, sound proof door,hospital door, clean room door and other special door.

Benefit from advanced technique and efficient international marketing exploration. Xunzhong has gained good reputationas reliable partner in over 50 countries and regions such as North America, Europe, Australia, South America, Middle East, South Asia , Southeast Aisa,etc.

Xunzhong Products constantly strive to provide professional doors solution by providing premium products at competitive prices. Complete range of production line can meet different requirement from various customers. We sincerely hope to establish lastingbusiness relationships with customers worldwide.



# UL&EN Fire Door

XunZhong fire door meets ANSI/UL10C

UL10B CAN/ULC-S104/EN/BS-476-22

20 minutes up to 3 hours fire rating.

Available with fire proof glazing and top light widely applied to Industrial, Commercial, Chemical, Nuclear and Medical Industries.



## Frame

Various kinds design of frame profiles are available, suitable for different installation environment.

## Hardware Available

UL/Non-UL panic bar, external level trim, door closer, hinge, flush bolt, vision glass, magnetic door holder, coordinator, smoke seal, handle lock, automatic door bottom seal etc.

## Option

Door and frame surface finish could be customized according to RAL color chart.





Certified with ANSI/UL10C UL10B  
CAN/ULC-S104/EN/BS  
20minutes up to 3 hours fire rating



Certified with ANSI/UL10C UL10B  
CAN/ULC-S104/EN/BS  
20minutes up to 3 hours fire rating



Certified with ANSI/UL10C UL10B  
CAN/ULC-S104/EN/BS  
20minutes up to 3 hours fire rating

# UL Steel Fire Door ”



Certified with ANSI/UL10C UL10B CAN/  
ULC-S104/EN/BS  
20 minutes up to 180 minutes fire rating  
Double Door customized Max Size:  
8\*8 feet  
Available with panic bar



# UL Steel Fire Door



Certified with ANSI/UL10C UL10B  
CAN/ULC-S104/EN/BS  
20minutes up to 3 hours fire rating



Certified with ANSI/UL10C UL10B  
CAN/ULC-S104/EN/BS  
20minutes up to 3 hours fire rating



Certified with ANSI/UL10C UL10B  
CAN/ULC-S104/EN/BS  
20minutes up to 3 hours fire rating

Certified with ANSI/UL10C UL10B CAN/ULC-S104/EN/BS

20 minutes up to 180 minutes fire rating

Single Door customized Max Size: 4\*8 feet

Double Door customized Max Size: 8\*8 feet

# UL Steel Fire Door





# UL Steel Fire Door

Certified with ANSI/UL10C UL10B CAN/ULC-S104 /EN/BS

20 minutes up to 180 minutes fire rating

Single Door customized Max Size: 4\*8 feet

Double Door customized Max Size: 8\*8 feet



# UL Steel Fire Door

Certified with ANSI/UL10C UL10B CAN/ULC-S104/EN/BS

20 minutes up to 180 minutes fire rating

Single Door customized Max Size: 4\*8 feet

Double Door customized Max Size: 8\*8 feet





# UL Steel Fire Door

Certified with ANSI/UL10C UL10B CAN/ULC-S104/EN/BS

20 minutes up to 180 minutes fire rating

Single Door customized Max Size: 4\*8 feet

Double Door customized Max Size: 8\*8 feet



# UL Steel Fire Door

Certified with ANSI/UL10C UL10B CAN/ULC-S104/EN/BS

20 minutes up to 180 minutes fire rating

Single Door customized Max Size: 4\*8 feet

Double Door customized Max Size: 8\*8 feet






# UL Steel Fire Door

Certified with ANSI/UL10C UL10B CAN/ULC-S104/EN/BS

20 minutes up to 180 minutes fire rating

Single Door customized Max Size: 4\*8 feet

Double Door customized Max Size: 8\*8 feet

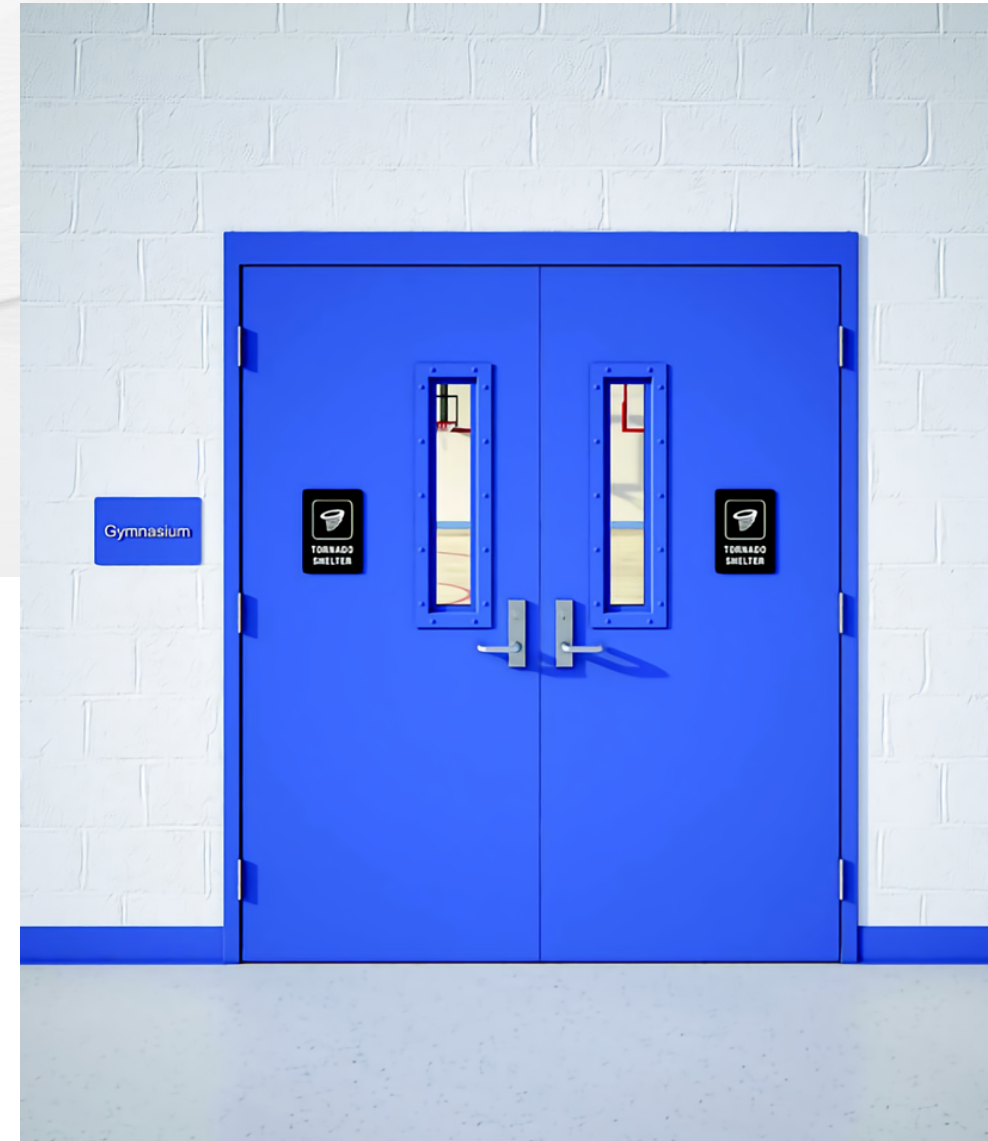

# STEEL FIRE DOOR



20 minutes up to 3 hours fire rating

Single Door customized max Size: 4\*8 feet

Available with handle lock

# STEEL FIRE DOOR



20 minutes up to 3 hours fire rating

Single Door customized max size: 4\*8 feet

Available with press bar

20 minutes up to 3 hours fire rating

Single Door customized max size: 4\*8 feet

Available with press bar




20 minutes up to 3 hours fire rating

Single Door customized Max Size: 4\*8 feet

Available with louver

Available with handle lock

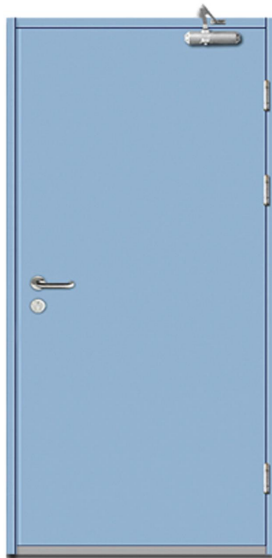

# FIRE DOOR CROSS SECTION VIEW



## STEEL DOOR SKIN:

16GA(1.5mm),18GA(1.1mm),20GA(0.9mm)  
A40 Galvanized Or Cold-rolled Steel Skins  
Construction is 1-3/4 " (45mm)Thickness

Hinge,closer,lock and strike plate reinforcements  
shall be provided.

Hinge reinforcement:10GA(3.5mm)

Closer reinforcement:12GA(2.5mm)

Lock reinforcement:16GA(1.5mm)

Strike plate reinforcement:16GA(1.5mm)


The top,bottom and side closures are fabricated  
from 16GA(1.5mm) thick channel shaped steel sections  
welded to the front and back door skins.  
Flush top channel:16GA(1.5mm)

Laser-welded side-seamed edge.

Widths up to and including 4 ' 0 "

Heights up to and including 8 ' 0 "


Available with polystyrene core or honeycomb core.

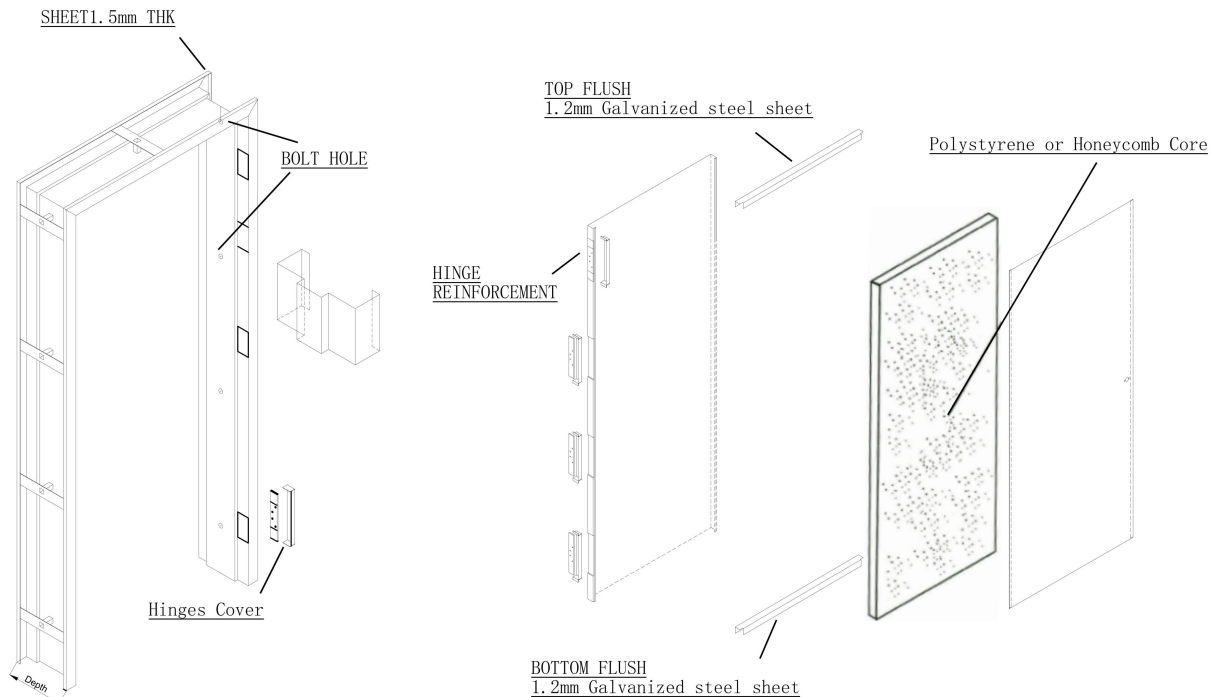

# FIRE DOOR FRAME CONSTRUCTION VIEW



## MASONRY/STUD CONSTRUCTION FRAME

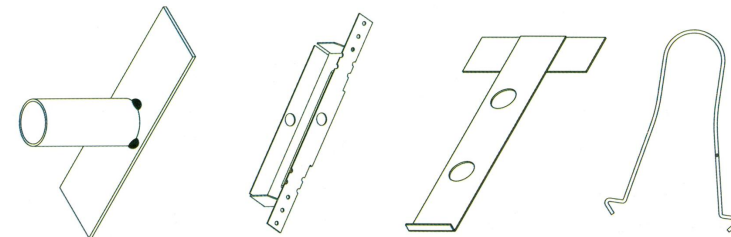

Wire Anchor


T Anchor

Universal Anchor

Tube Anchor

Jamb Depth	4-3/4 "	5-3/4 "	6-1/4 "	6-3/4 "	7-1/4 "	7-3/4 "	8-1/4 "	8-3/4 "	9-1/4 "	10-1/4 "
Throat Opening	3-3/4 "	4-7/8 "	5-1/4 "	5-3/4 "	6-1/4 "	6-3/4 "	7-1/4 "	7-3/4 "	8-1/4 "	9-1/4 "

## DRYWALL FRAME

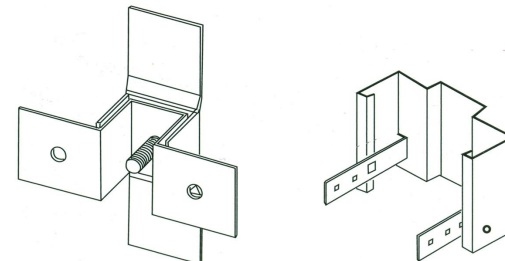


Compression Anchor

Snap in sill Anchor

Jamb Depth	4-3/4 "	5-7/8 "	6-1/4 "	6-5/8 "	7-1/4 "	7-3/4 "	8-1/4 "
Throat Opening	3-3/4 "	4-7/8 "	5-1/4 "	5-5/8 "	6-1/4 "	6-3/4 "	7-1/4 "

## Frame Profiles

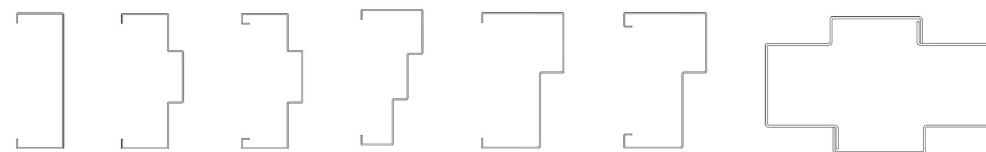

xunzhong steel fire doors conform or exceed SDI/HMMA industrial standards,fire tested and certified with UL,Intertek/WH from 20Min up to 3hrs fire rating,complying criteria as UBC7-2,ANSI/UL10C UL10B CAN/ULC-S104

# Wooden Fire Door ”



Certified with ANSI/UL10C UL10B CAN/ULC-S104/EN/BS

20 minutes up to 90 minutes fire rating

Single Door customized Max Size: 4\*8 feet





# UL Wooden Fire Door

”

Certified with ANSI/UL10C UL10B CAN/  
ULC-S104/EN/BS  
20 minutes up to 90 minutes fire rating  
Double Door customized Max Size:  
8\*8 feet  
Available with panic bar

# UL Wooden Fire Door”




Certified with ANSI/UL10C UL10B CAN/ULC-S104/EN/BS

20 minutes up to 90 minutes fire rating

Double Door customized Max Size: 8\*8 feet

Available with panic bar

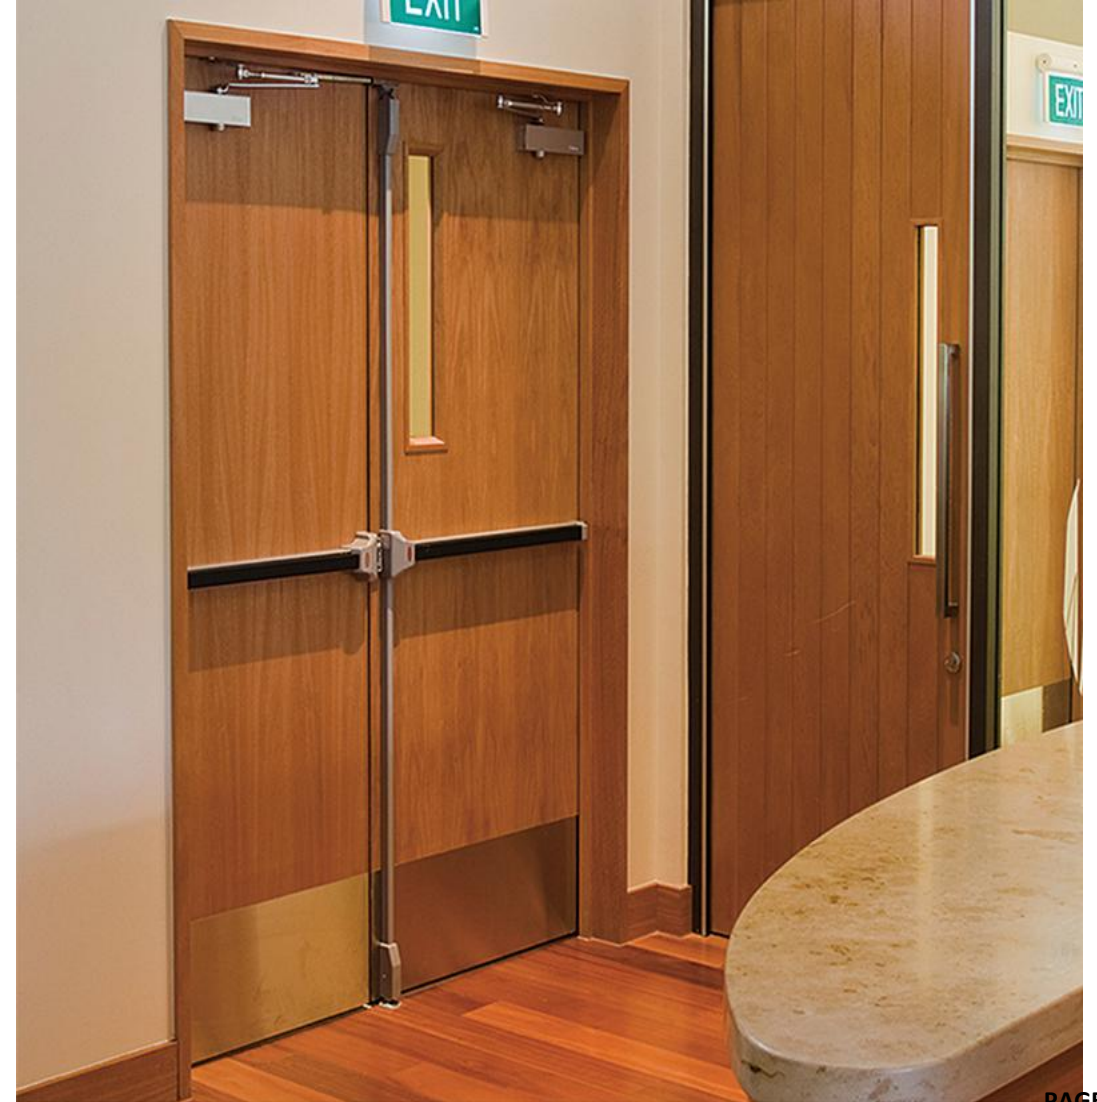




# UL Wooden Fire Door



Certified with ANSI/UL10C UL10B  
CAN/ULC-S104/EN/BS  
20 minutes up to 90 minutes fire  
rating  
Double Door customized Max Size:  
8\*8 feet  
Available with panic bar



# UL Wooden Fire Door

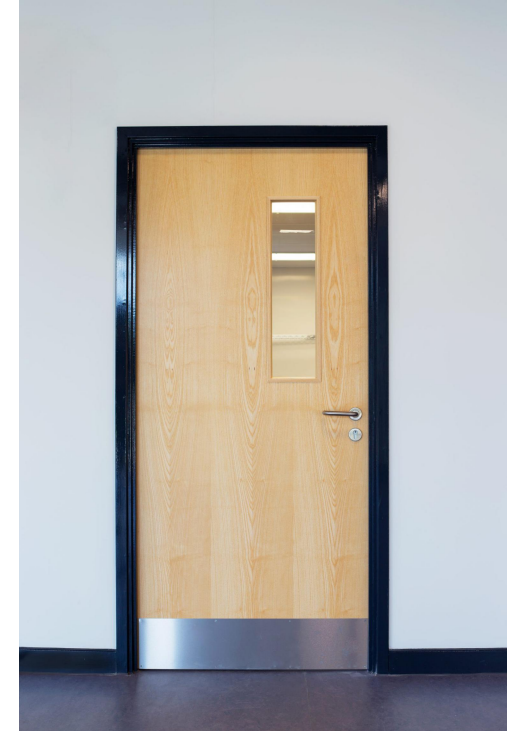

Certified with ANSI/UL10C UL10B CAN/  
ULC-S104/EN/BS  
20 minutes up to 90 minutes fire rating  
Single Door customized Max Size: 4\*8 feet





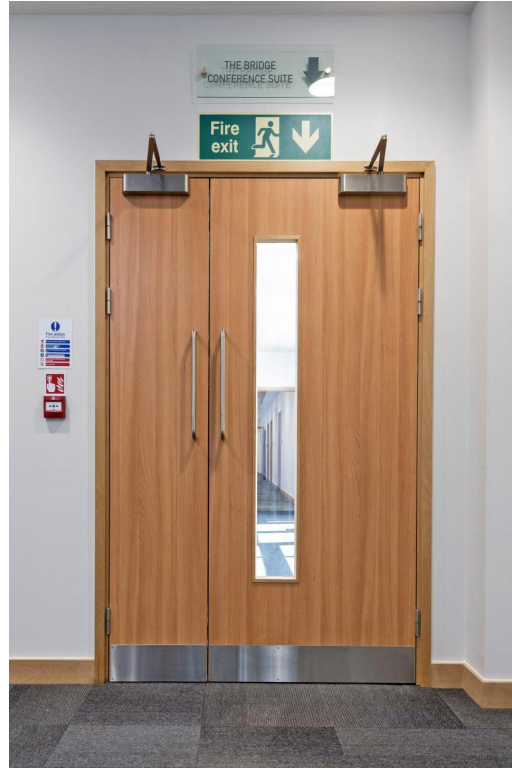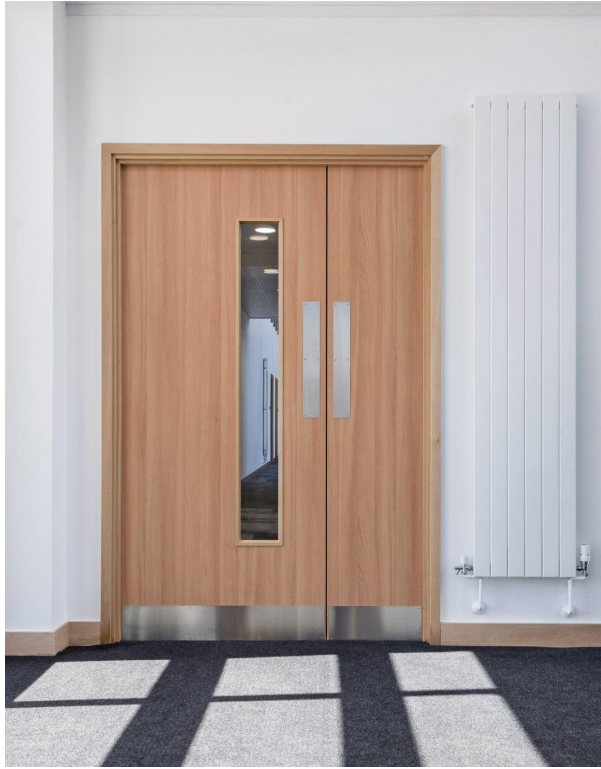

Certified with ANSI/UL10C UL10B CAN/ULC  
-S104/EN/BS


20 minutes up to 90 minutes fire rating

Double Door customized Max Size: 8\*8 feet

Available with panic bar



# UL Wooden Fire Door

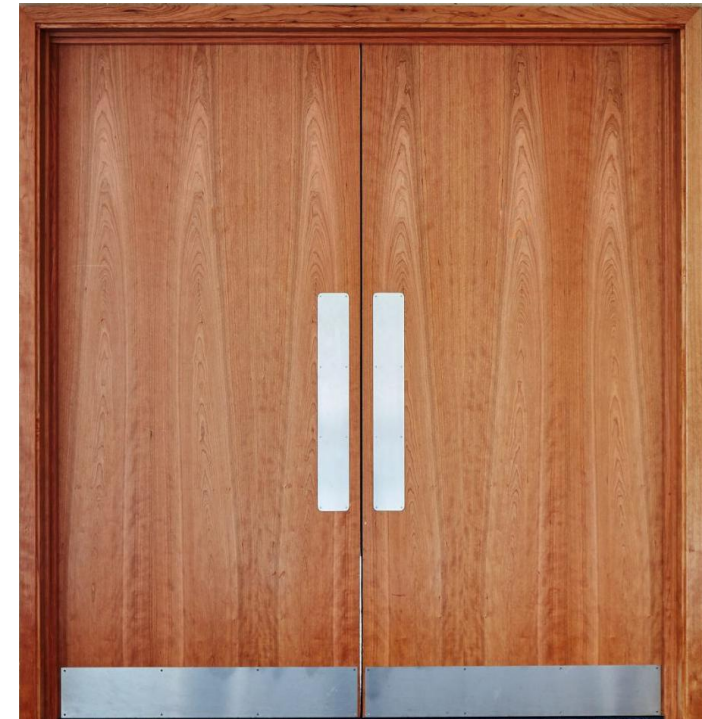

Certified with ANSI/UL10C UL10B  
CAN/ULC-S104/EN/BS  
20 minutes up to 90 minutes fire  
rating  
Double Door customized Max Size:  
8\*8 feet  
Available with panic bar





# Hospital Door



**Suitable for**  
meeting room  
training  
ward

Hospital door of the ward is convenient for medical staff and patients to pass through more quickly and conveniently, which is friendly environment, bacteria resistance, and also is conducive to the operation efficiency of the hospital.






# Operation Room Door



Available with hand sensor switch/foot sensor switch/infrared sensor switch.



# Operation Room Door

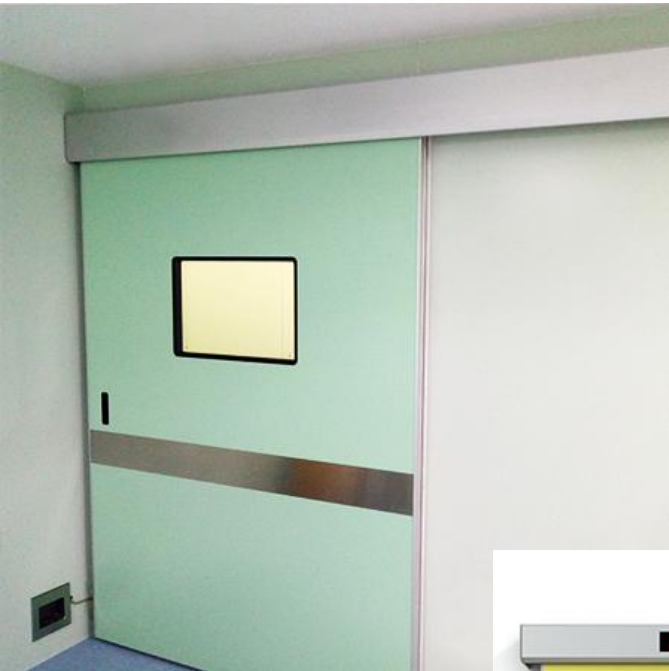

Available with hand  
sensor switch/foot sensor  
switch/infrared sensor  
switch



Mainly used in hospital operation department,  
purification ward, laboratory, isolation  
infection ward.

# Sound-Proof Door



Soundproof doors are mainly used in places with strict sound insulation requirements, such as hotels, opera houses, theaters, recording studios, radio studios, audition rooms, offices, band rooms, stadiums, etc. For sound insulation, the door leaf molding is mainly made of new galvanized steel, damping sound insulation boards, sound insulation cotton, etc. as sound insulation fillers.



# Wooden Door

High Quality Material,  
Durable No Deformation





## Explosion Proof Door



Explosion proof door  
Certificate: GB17565-2007  
Size: customized  
Anti-explosion Pressure:  
Grade A :1.5Mpa,  
Grade B: 600Kpa



## Explosion Relief Door



Explosion Relief door controls the explosion or minimizes the damage by opening the window and releasing pressure through a release fitting or device. Steel frame frame is adopted, and the interior of the door is filled with fire insulation rock wool. release door can be controlled by the release bolt. After the explosion, after simple treatment can continue to use.

# Steel Shutter Proof Door



MATERIAL: STEEL/ALUMINUM ALLOY

AVAILABLE SIZE: CUSTOMIZED

BASIC SETTING: MOTOR, REMOTE CONTROL, SWITCH




# Steel Shutter Door



MATERIAL: STEEL/ALUMINUM ALLOY

AVAILABLE SIZE: CUSTOMIZED

BASIC SETTING: MOTOR, REMOTE CONTROL, SWITCH

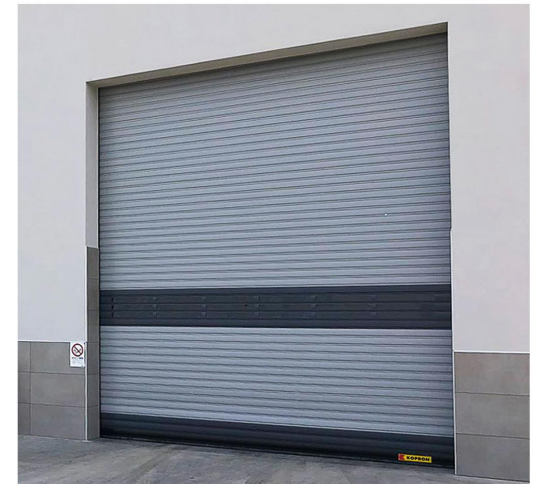



# Industrial Folding Door



The door body is light, insulation,  
moisture-proof, fire retardant, dust free and easy to clean  
Folding door because of its push and pull freely, save space



# Factory





# Factory





# Factory



# Factory





# Transportation

We provide complete logistics solution to meet your requirement.






# Successful case

Xunzhong Industry Co., Ltd





# Application

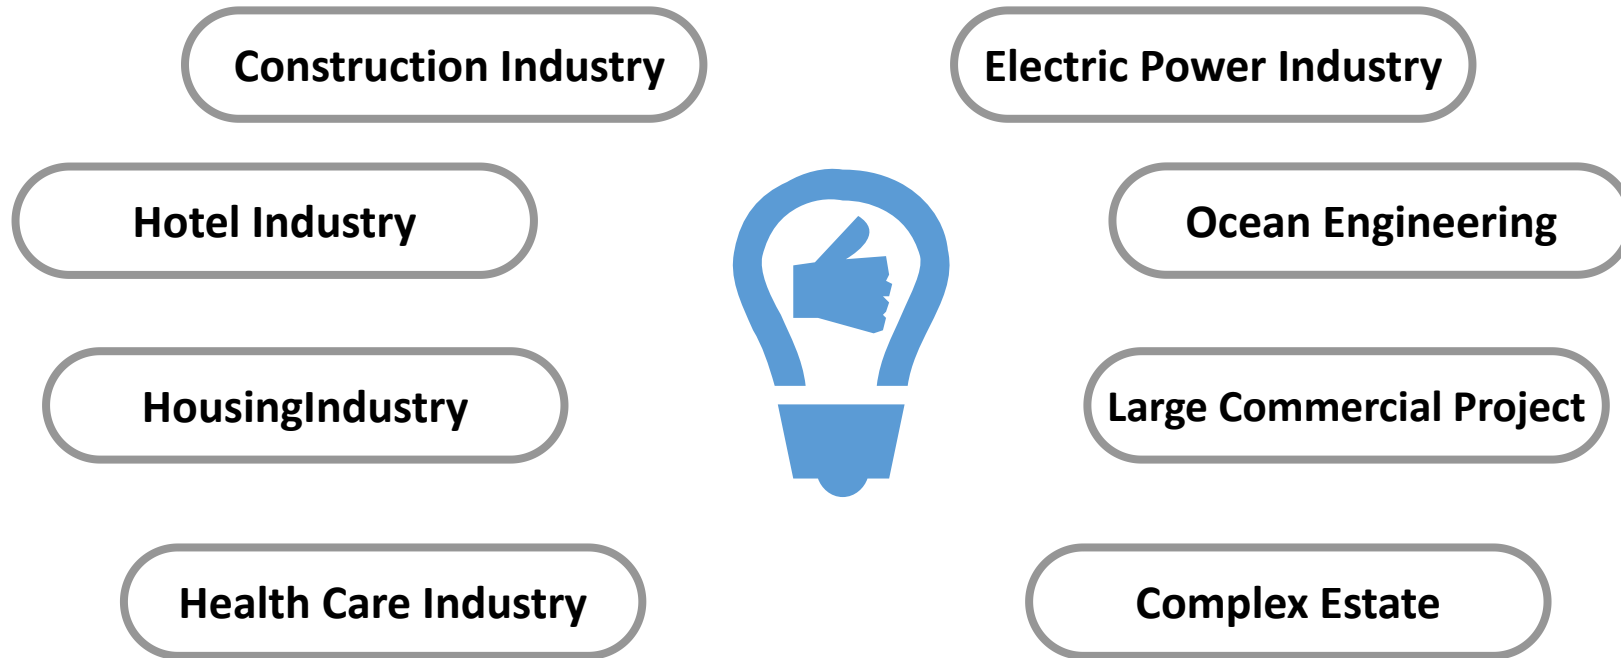

## PANIC EXIT DEVICES SERIES




## OTHER HARDWARE





# Contact us

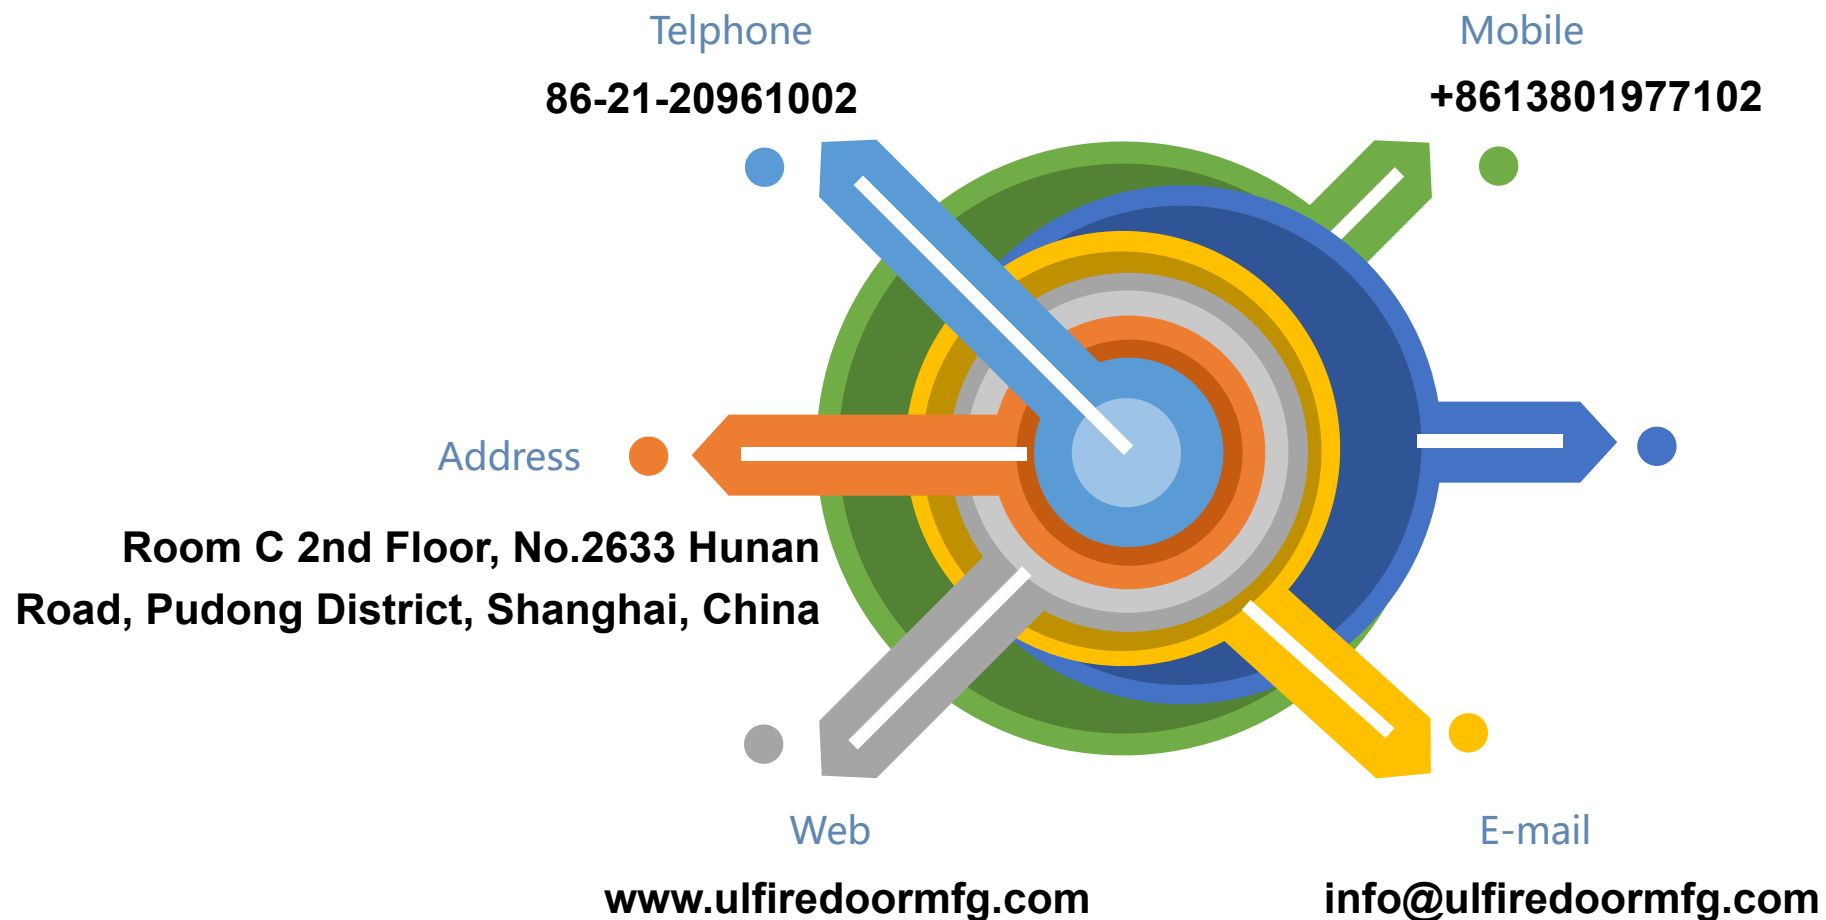



A low-angle, upward-looking photograph of several modern skyscrapers with glass facades, reaching towards a cloudy sky. The perspective creates a sense of height and architectural grandeur.

# THANK YOU

SHANGHAIXUNZHONG  
INDUSTRY CO.,LTD

---