


# ProTura®

*Nanofiber Technology*

## TECHNICAL DATA

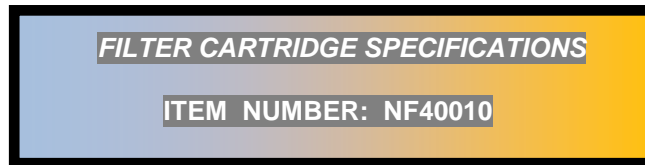

Dimensions:	Height:	30"
	Outside Diameter:	12.74"
	Inside Diameter:	8.375"
Top End Cap:	Material:	Electro Galvanized (22 ga)
	Style:	Open
Bottom End cap:	Material:	Electro Galvanized (22 ga)
	Style:	Open
	Bolt Hole:	
Gasket:	1/2" x 1/2" x 10.25" ID isoprene sponge applied on top cap	
Inner Retainer:	Electro galvanized expanded metal 3/8" x 5/8" (9.53 mm x 15.88 mm) 72% open area	
Outer Retainer:	Electro galvanized expanded metal 3/8" x 5/8" (9.53 mm x 15.88 mm) 72% open area	
Filter Media Area:	260 ft <sup>2</sup>	
Pleat Count:	325 +/- 2	
Media Type:	<b>ProTura</b> Nanofiber Technology – Fire Retardant	
Permeability:	20 cfm/ft <sup>2</sup> @ 0.5" w.g. 160 L/sec/m <sup>2</sup> @ ΔP 20 mm w.g.	
Maximum Temperature:	180° F (82.22° C)	



# *ProTura*®

*Nanofiber Technology*

Minimum Efficiency Reporting Value: Merv 15 @ 900 cfm

Particle Efficiency: 99.99% @ 0.5 micron